

■ Group switching:

When the wireless handheld station is in operation, short press the menu button to enter the menu list ->group selection ->short press the up and down keys to scroll up and down to select the desired group name ->short press the menu button to confirm and switch to the desired group.

Single call selection:

When the wireless handheld station is in operation, short press the menu button to enter the menu list ->member selection ->short press the up and down keys to scroll up and down to select the desired switching member name ->short press the menu button to confirm the selection of a single or multiple members who need to make a single call, and short press PTT to confirm the single call.

■ Main menu items:

Group Selection

Member Selection

Set up

my

■ Settings

Dual card switching

Power Saving Mode

Automatically turn off the screen

Send and receive prompt sound

keypress sound

Keyboard lock

Single call exit time

System upgrade

Time Zone (only supports overseas platform versions)

Wireless handheld station


User manual

Unpacking Inspection

Welcome to use our wireless handheld transceiver. Before operation, we recommend that you carefully open the packaging box and verify all items listed in the table below are complete. Should you find any missing or damaged product and accessories caused during transportation, please contact us immediately.

Item Name	Quantity
Wireless Handheld Transceiver	1
User Manual	1
Battery Pack	1
Charger	1
Lanyard	1
Certificate of Conformity	1

Button Instructions

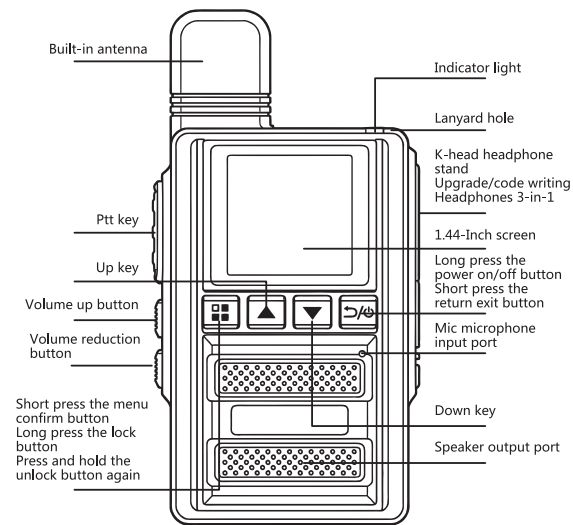

LTE Band 2: 1850-1910 MHz(TX), 1930-1990 MHz(RX)
LTE Band 4: 1710-1755 MHz(TX), 2110-2155 MHz(RX)
LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX)
LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX)
LTE Band 66: 1710-1780 MHz(TX), 2110-2180MHz(RX)

Instructions

■ Power on/off

Press and hold the power button to turn on the device, the blue light flashes, and the login connection display screen shows successful login. Press and hold the power button again to turn off the device.

■ Increase/decrease volume

Short press the volume up button to increase the volume, and short press the volume down button to decrease the volume.

■ Transmission and reception

Press and hold the PTT switch, speak into the microphone input port, and the indicator light will turn red at the same time; Release this button, and when a member of the group is received, they will receive the spoken voice and the indicator light will turn blue.

Indicator Light

Launch - Red Light

Reception - Blue Light

Standby - Blue light flashing (online breathing light)

Low voltage (3.35V) - The battery symbol space is red

Ultra low voltage (3.25V) - The battery symbol space is red and automatically shuts down

Button Operation

On the main interface, short press the menu key to enter the main menu list, short press the up and down keys to scroll up and down to select any function menu, short press the menu key to confirm, short press the return key to return to the previous menu operation, and short press the return key again to exit the main menu.

FCC Statement:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

SAR tests are conducted using standard operating positions accepted by FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC.

Tests for each product are performed in positions and locations as required by the FCC. For body worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with and accessory designated for this product or when used with and accessory that contains no metal.

To maintain compliance with FCC RF exposure guidelines hold the transmitter and antenna at least 1 inch (2.5 centimeters) from your face and speak in a normal voice, with the antenna pointed up and away from the face.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Quanzhou Zhuoyida Communication Equipment Co., Ltd.

3rd Floor, No.6 Elevator, Shenzhou Tong Building, Nanhuang Road,
Licheng District, Quanzhou City, Fujian Province, China

