


# Pizza Holding Table

## ASSEMBLY INSTRUCTIONS

### CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.  
**SAVE YOUR BOX AND ALL PACKING MATERIALS.**  
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

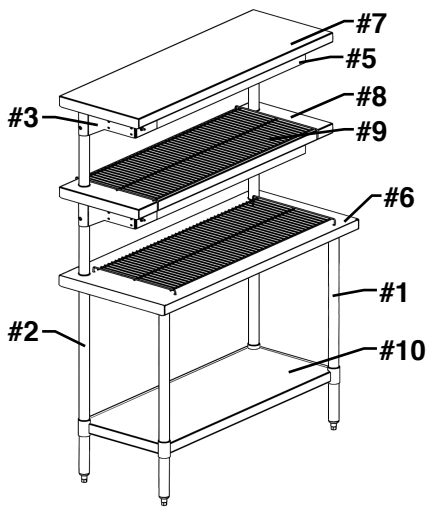

### Parts List


| #   | qty | part # | description           |
|-----|-----|--------|-----------------------|
| #1  | 2   | 300317 | 33" front legs        |
| #2  | 2   | 354161 | 63" rear legs         |
| #3  | 2   | 310058 | left brackets         |
| #4  | 2   | 310053 | right brackets        |
| #5  | 2   | *      | food warmers          |
| #6  | 1   | 310005 | tabletop              |
| #7  | 1   | 310007 | top overshelf         |
| #8  | 1   | 310008 | bottom overshelf      |
| #9  | 2   | 310046 | pizza racks           |
| #10 | 1   | 352181 | adjustable undershelf |
| #11 | 8   | 310173 | bolt, 3/8-16, 2-1/8"  |
| #12 | 8   | 310176 | nut, 3/8-16           |

\* Varies per order.

### Step 1 - While on its side, mount undershelf to legs at desired height. Seat one leg at a time.

- Secure legs to undershelf with set screw\* (using 5/32" allen wrench provided).
- Each corner must be at the same height from bottom of legs, or shelf collars could fail.
- Make sure holes in rear legs are facing each other.

**NOTE:** Undershelf must be level. Use care not to overtighten undershelf set screws\* or failure will occur. Recommended height from the floor to the top of undershelf is 10".

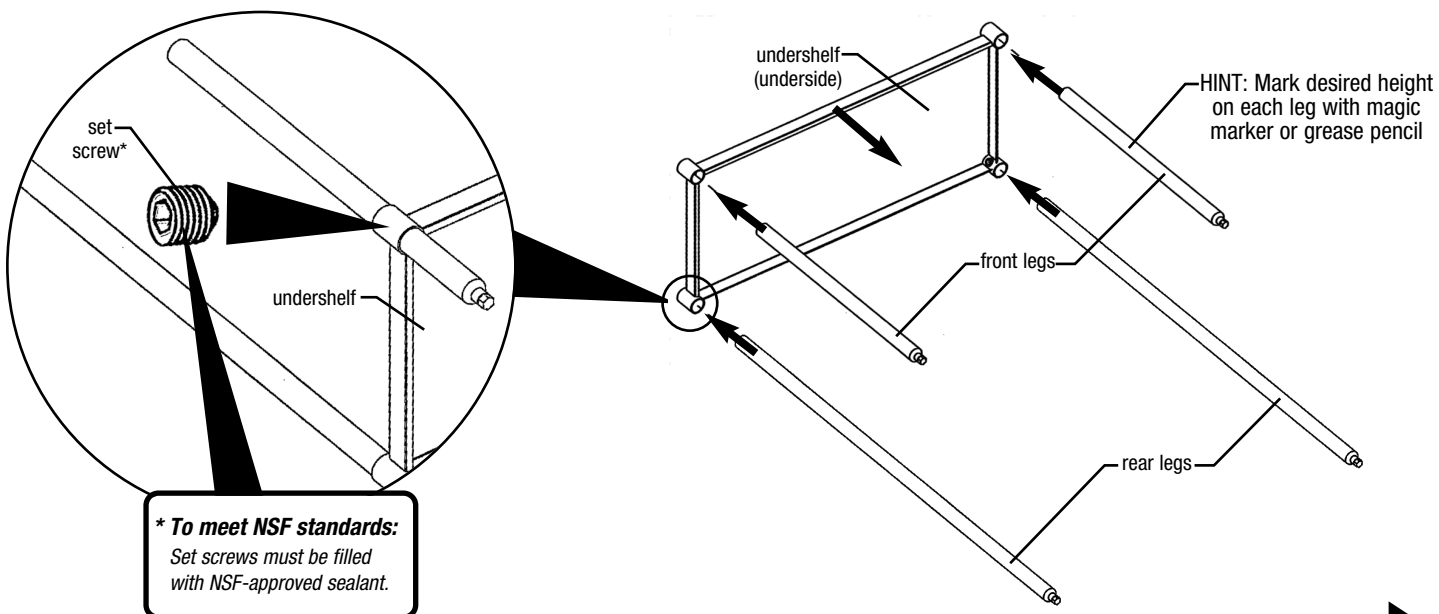

(continued on back page)


EG9860 Revised 02/23

# Pizza Holding Table


## ASSEMBLY INSTRUCTIONS

### Step 2 - Stand table upright and mount tabletop.

- Place tabletop onto top of legs.
- Insert each leg into each tabletop gusset.
- With 5/32" allen wrench, tighten set screw\* on each gusset.




**\* To meet NSF standards:**  
Set screws must be filled  
with NSF-approved sealant.

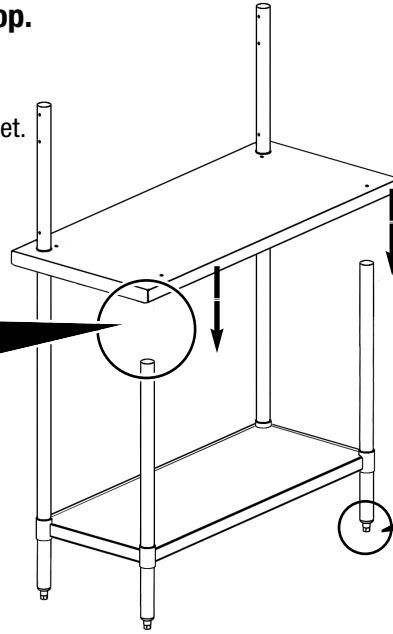



### Step 3 - Level unit.

The leveling feet allow  
approximately 1" adjustment.




### Step 4 - Attach bottom overshelf to rear legs.

- Place overshelf onto top of legs, and slide overshelf down until bracket holes are aligned with bottom set of holes on legs.
- Run bolts (two per bracket) through bracket and legs, and tighten with nuts. Hardware included.

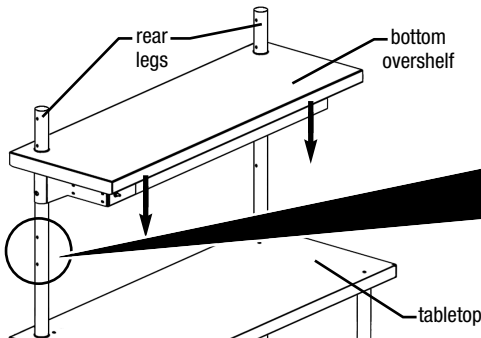


### Step 5 - Attach top overshelf to rear legs.

- Place overshelf onto top of legs, aligning bracket holes with holes on legs.
- Run bolts (two per bracket) through bracket and legs, and tighten with nuts. Hardware included.

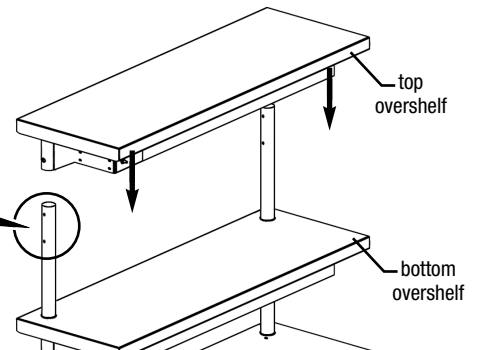

### Step 6 - Place racks as shown.

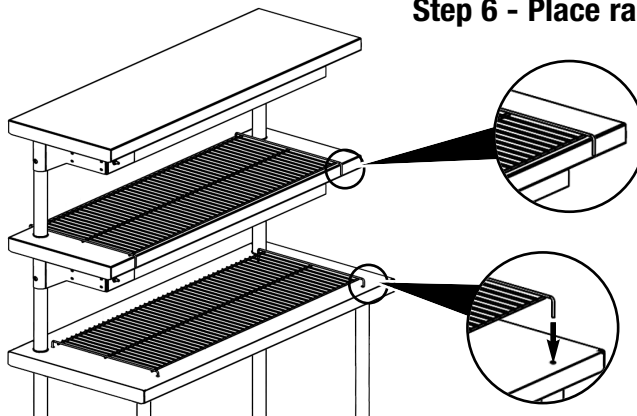

Assembly is complete.



**EAGLE**  
GROUP  
Profit from the Eagle Advantage®

• 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.  
• Phone: 302/653-3000 • 800/441-8440 • Fax: 302/653-2065  
• [www.eaglegrp.com](http://www.eaglegrp.com) • [www.eaglegrpnews.com](http://www.eaglegrpnews.com) • [www.eaglemhc.com](http://www.eaglemhc.com)

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2023 by the Eagle Group