


# Z CAM<sup>®</sup> E2<sup>N</sup> Mark II


4K Professional Camera

NDI HX3  
CERTIFIED

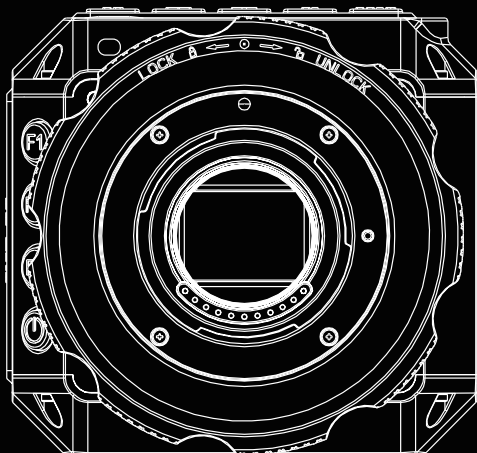


## Quick User Guide


# CAMERA INTRODUCTION

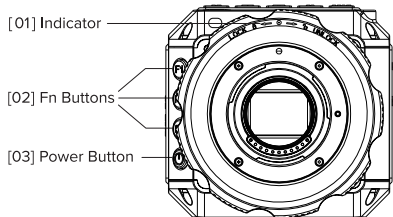

**Front**

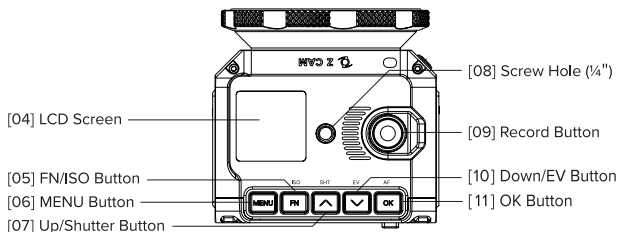


**Top**




**Left**


- [14] SD Card Slot



**Right**

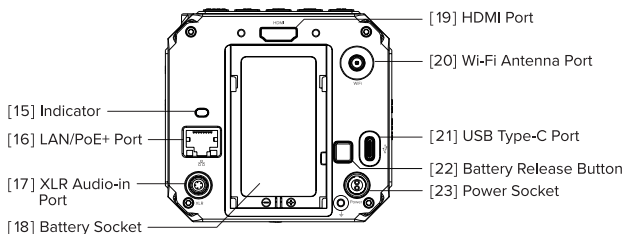

**Back**

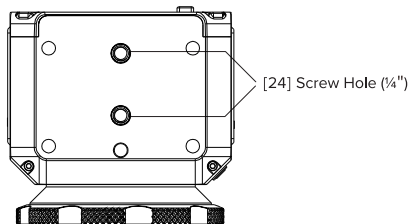

**Bottom**

## ■ POWER SUPPLY

### Using PoE+ (Power over Ethernet) ①

- Connect a network cable (category 5e or higher, shielded twisted pair) from the PoE+ power supply device (Compliant with the IEEE802.3at) to [16] LAN/PoE+ port.

### Using Camera Battery (LP-E6 compatible) ②

- Mount LP-E6 battery onto [18] Battery Socket of camera;
- Push gently downwards and lock into position.

### Using 12V DC ③

- Connect AC DC power adapter (12V/5A) DC output to the [23] Power Socket through LEMO connector;
- Connect AC DC power adapter AC input to AC power outlet (110~240V, 50/60 Hz).

Note:

- ① Network cable is not included in the standard package. For more information on the connection, refer to the instruction manual of the PoE+ power supply device.
- ② Only compatible with LP-E6 battery which is not included in the standard package.
- ③ AC-DC power adapter and LEMO connector are optional accessories and not included in the standard package.

## ■ HOW TO TURN ON Wi-Fi

- Connect the antenna to the [20] Wi-Fi Antenna Port;
- Turn on the camera. Set Wi-Fi to ON in “Connect” – “Network” settings;
- Press [06] MENU Button to return to home screen. Wi-Fi icon shall be displayed at the top;
- Connect a mobile phone to the camera over Wi-Fi. Default password : 12345678.

## ■ INDICATOR<sup>[01]</sup> [15] STATUS

<b>Green</b>	: Standby
<b>Red</b>	: Recording
<b>Flashing Red (every 1s)</b>	: No storage
<b>Flashing Red (every 0.5s)</b>	: Storage full
<b>Flashing Red (every 0.2s)</b>	: Overheat
<b>Flashing Red (very fast)</b>	: Critical error
<b>Flashing Red (fast &amp; slow alternanting)</b>	: Low Battery

## ■ Z CAM APP

Scan the QR code below to access the Z CAM official app download page, and download and install the Z CAM mobile application.

The app supports connecting to your device via Wi-Fi or USB cable, enabling real-time monitoring and remote control of your Z CAM camera.



## ■ DISCLAIMER

All product features and technical specifications stated are subject to the sole interpretation and explanation of Shenzhen ImagineVision Technology Limited, and subject to change without notice.

# ■ LIMITED WARRANTY

## Warranty Scope

Warranty Service covers defects in material and workmanship of Z CAM E2N Mark II (hereinafter collectively referred to as “this Product”).

## Warranty Period

Warranty Period is 12 months from the date of original purchase. Warranty period will start 90 days from date of shipment according to internal record of Shenzhen ImagineVision Technology Limited (herein after referred to as "ImagineVision"), whichever is later, in case of failure to provide valid purchase invoice or other valid proof showing date of original purchase, serviced or replacement product will continue to be covered under the original warranty period of the product.

## Warranty Arrangement

In case the product is found defective either due to material or workmanship issues by ImagineVision or its designated/approved service partners within the warranty period, ImagineVision or its designated/approved service partners will carry out repair service or product replacement at no cost. Note that all costs and risks associated with the transportation and delivery of the defective product to ImagineVision or its designated/approved service partners shall be borne by the customer.

## Limited Warranty:

- This warranty is non-transferable and non-assignable, and only applicable to the original purchase customer.
- This warranty does not cover any misused, abused, accidentally or intentionally damaged, altered /deleted serial number product.
- This warranty does not cover repaired or replacement products serviced by non ImagineVision authorized service center or personnel.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.



---

深圳视觉科技有限公司  
广东省深圳市南山区中山园路1001号  
TCL国际E城F5栋1A  
邮编：518055

[www.z-cam.com.cn](http://www.z-cam.com.cn)

版权所有 ©2026 深圳视觉科技有限公司保留所有权利。  
所有商标均为其所有者的财产。