

FCC Caution: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

 **CAUTION**

1. Risk of explosion if the battery is replaced by an incorrect type;

2. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;

3. Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;

4. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.


5. Do not ingest battery, Chemical Burn Hazard.

6. Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

NOTICE:
This manual is for the purpose of product use and operation.
Design and specifications are subject to change without notice.


Wireless Remote Control Doorbell

USER MANUAL

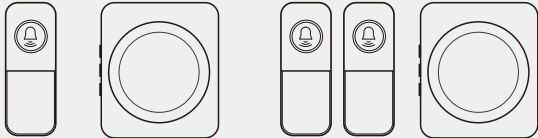

MODEL: RL-3883(22TX)

MODEL: RL-3883B(22TX)

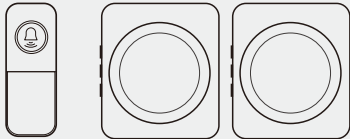


MODEL: RL-2R3883(22TX)

- 60 ringtones.
- 4 levels for volume adjustment.
- Adopt learning code technology to effectively avoid interference.
- Each remote control can be set to a unique ringtone.




FUNCTION KEYS

① Remote Control



② Receiver

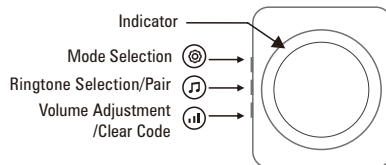

INSTRUCTIONS


- Mode Selection:** Press “⊗” on the side of the receiver to select among 3 modes, i.e., Light Flashing Only, Ringtone Only, Ringtone with Light Flashing.
- Ringtone Selection:** Press “⌂” once on the side of the receiver to select the next ringtone while press “⌂” twice to select the previous ringtone. There are 60 ringtones in total for selection.
- Volume Adjustment:** Press “⏮” on the side of the receiver to adjust the volume. Low/Medium/High/Max..
- Pairing:** First select the ringtone. Then long press “⌂” on the side of the receiver for over 3 seconds, it will sound “Ding-Dong” to indicate that it has entered into the pairing state. Now, press the Push button on the remote control, when the receiver sounds the ringtone selected, the pairing is successful (Follow the instruction to pair one remote control to the receiver. To pair more, repeat the instruction. Max 20 remote controls can be paired to one receiver and each remote control can be set to a unique ringtone.).
- Clearing Code:** Long press “⏮” on the side of the receiver for over 5 seconds, it will sound “Ding-Dong, Ding-Dong” to indicate that clearing code is successful (This action will clear the code for all remote controls).
- Power Indicator:** Each time the receiver is powered on, it will sound “Ding-Dong” to indicate that connecting to power supply works well.
- Indicator Light:** When the receiver plays a ringtone, the indicator on its front will flash in accordance with the ringtone. When pressing the Push button on the remote control, the indicator light on the remote control will be on.

PACKAGE CONTENTS

- RL-3883(22TX): Receiver×1, Remote Control×1, 3M sticker×1
 RL-3883B(22TX): Receiver×1, Remote Control×2, 3M sticker×2
 RL-2R3883(22TX): Receiver×2, Remote Control×1, 3M sticker×1

PREPARATION BEFORE USE

Remote Control




- Loosen the bottom screw and open the back cover.
- Insert the batteries, close the back cover, and tighten the screw.
- Attach the included 3M adhesive to the back of the remote control.
- Attach the remote control to the wall or door to complete.



Do not install the remote control on any metal objects, which can seriously cause interrupted transmission.

Note: In addition to the 3M adhesive, you may choose screw installation.

For screw installation, first secure the back cover to the wall, then attach the front cover, finally tighten the screws.

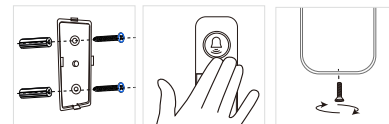

NOTE:

- Do not mix old and new batteries
- It is recommended to use alkaline batteries for the Remote Control.
- Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc.) batteries
- Dispose of used batteries in accordance with applicable local laws and regulations.



TECHNICAL SPECIFICATIONS

① Remote Control

Battery: DC 3V (AAA*2)
 Standby Current: <2μA
 Working Current: <40mA
 Modulation: OOK
 Frequency: 433.92MHz
 Transmitting Time: 2s/transmission
 Working Temperature: -15°C~50°C
 Use Environment: Indoor or Outdoor
 IP Rating: IPX5

② Receiver

Power: AC 100~240V 50/60Hz
 Standby power consumption: 0.5W
 Working power consumption: 2W

Volume (30cm) { Low: 58-68dB
 Medium: 68-73dB
 High: 73-78dB
 Max: 78-88dB

Distance: ≈400m (Open Area)
 Working Temperature: -10°C~50°C
 Use Environment: Indoor