


Linkind

User Manual

Linkind Smart Solar Spotlight SL5

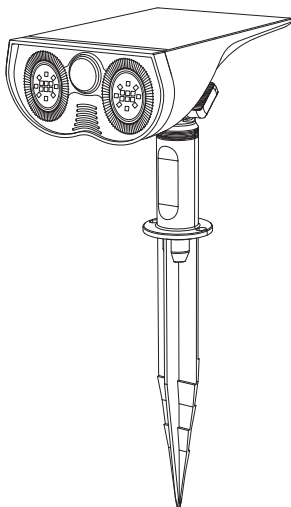

Works with **AiDot**





HOW-TO VIDEOS

CATALOGUE English

SPECIFICATION	01
INTRODUCTION	01
PACKAGE CONTENTS	01
INSTALLATION	02
BUTTON CONTROL	03
CONNECTING TO THE AiDot APP	03
MANAGE SL5 WITH THE AiDot APP	04
GROUP CONTROL	06
SYNC LIGHTS WITH MUSIC	06
TROUBLE SHOOTING	07
TIPS	08
WARNING	09


SPECIFICATION



LEDs	28
Durability	Dust and Water Resistant
Working Temperature Range	-10°C - 40°C
Housing Material	ABS
Working Modes	Standard and Motion Detection
Beam Angle	90°

INTRODUCTION


Linkind Smart Solar Spotlight SL5 seamlessly combines convenience and intelligence. Its plug-and-play wire-free solar-powered design makes setup a breeze, and the adjustable angle allows for easy aiming so you can highlight your yard in all the right places. Enjoy smart features such as group control and dynamic lighting. SL5 can sense the available light to turn on automatically from dusk until dawn.

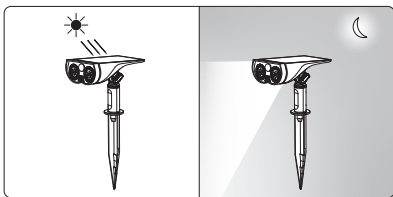

PACKAGE CONTENTS

- A. 1/2/4/6 x Linkind Smart Solar Spotlight SL5
- B. 1/2/4/6 x Ground Stake
- C. 1/2/4/6 x Mounting Rod
- D. 1/2/4/6 x Locking Bolt
- E. 3/6/12/18 x Wall Anchor
- F. 3/6/12/18 x Screw
- G. 1x User Manual

*Note: Contents vary between the 1, 2, 4, and 6 packs.


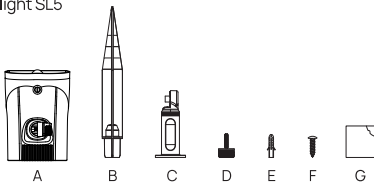


INSTALLATION

Whichever installation method you choose, ensure the location where the light is installed receives sufficient sunlight daily to keep the device charged.

Method 1: Ground Stake





- ① Connect the ground stake to the mounting rod. Attach the light to the mounting rod, set it to the desired angle, then secure it with the locking bolt.
- ② Insert the ground stake vertically into the ground.



Note: Please insert the turn-knob from the correct side as shown above.

Method 2: Wall Mounted

- ① If mounting to a wall made of a hard material such as concrete, drill two holes and insert the wall anchors into the holes, this may be skipped for soft materials such as wood. Then position the mounting rod in place and use the screws to secure it in place.
- ② Attach the light to the mounting rod, set it to the desired angle, then secure it with the locking bolt.

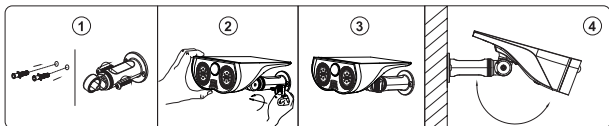

Note: Please insert the turn-knob from the correct side as shown above.

BUTTON CONTROL

By default, the light is off.
Press the button to turn it on and cycle through the lighting modes.


Short Press

Switch modes in the following order:

Red → Orange → Yellow → Green → Blue → Cyan → Purple
→ 2700K → 6500K → OFF

Long Press (5 seconds)

Enter pairing mode (reset Bluetooth connection).



Note:

The device operates in motion detection mode by default. The light will automatically turn on only when both of the following conditions are met:

1. Motion is detected.
2. Ambient light is low (e.g., the solar panel is covered).

For testing, please cover the solar panel and move within detection range.

CONNECTING TO THE AiDot APP


You can connect SL5 to the AiDot App with the following steps:

1. Scan the QR code below to download the "AiDot App".
Alternatively, you may search for "AiDot" in App Store or on Google Play.



AiDot App



Google, Google Home and Google Play are trademarks of Google LLC.



Download Interface

2. Long press the button on the light until it enters a light cycle between warm white and cool white.

3. Ensure that your phone's Bluetooth is enabled and open the AiDot App. Find and tap "Add Device" or "+", alternatively, you could use the "Nearby" option which will search for and locate any nearby "AiDot" products that are currently within range and in pairing mode. The app may request Bluetooth permission on your phone, you will need to allow this in order to connect to SL5.



4. If you can't find SL5, press and hold the red button on the bottom of SL5 for at least 5 seconds. SL5 should begin to cycle between cool white and warm white to indicate pairing mode. At this point, try connecting again in the AiDot App.


Note:

1. SL5 can be controlled from a distance of up to 30m (98ft) when unobstructed.
2. After SL5 is connected to the AiDot App, its default mode is motion detection with a 30s lighting time. You can change the mode in the settings to luminance detection mode or light mode, as well as adjust the lighting time after motion is detected.


MANAGE SL5 WITH THE AiDot APP

Manage these features of SL5 easily with the AiDot App:


- a) Power: Switch SL5 on and off.
- b) Brightness: Adjust the brightness SL5.



c) Presets: Activate various light effects, themes, and scenarios.



d) Tune the White Light: Vary the temperature of SL5's white light from 2,700K to 6,500K.





e) Set a Color: Choose a color for each of your SL5 lights and create personalized lighting effects.


SL5 offers three operating modes:

1. Motion Detection: SL5 automatically turns on when someone approaches, then turns off after they've left. This provides security lighting while conserving energy. An alternate form of this mode is called "Dim Light Mode." When activated, the light remain on with a low brightness level and will brighten when someone approaches. Group Control allows multiple SL5s to trigger together if any detect motion.

2. Luminance Detection: SL5 will automatically turn on at dusk and remains on until dawn. It stays off during the daylight hours and collects solar power for the next night.




3. Light Mode: SL5 remains on, providing constant illumination of your space, suitable for any situations requiring all-day lighting.



GROUP CONTROL


Group control synchronizes the grouped SL5s to function together in a number of ways:

1. Activating preset light effect scenarios.
2. Synchronizing color and temperature settings for group consistency. Group control spans across your selected SL5s for coordinated lighting, even across multiple locations and areas.




Note:

If after creating a group, some products only light up for 30 seconds or fail to sync, this is likely because your devices are in different modes. We recommend switching each device within the group to "Light Mode".



SYNC LIGHTS WITH MUSIC


1. On the device control page, you will find the "Music" option. You can also find the "Sync Lights with Music" feature in the "Automations" section of the home page.

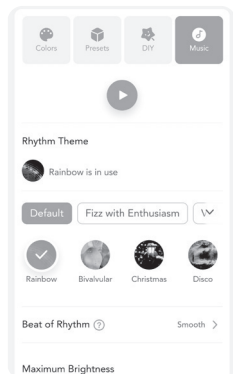

2. Using this feature, you can choose or create lighting effects to match the music that is playing.

Note:

To use the Sync Lights with Music feature, you need to grant the application Bluetooth permissions on your phone and ensure that the Bluetooth functionality of your phone is turned on.



TROUBLE SHOOTING

Possible Cause	Solution
1. If the light fails to turn on;	a) Check if there is a nearby light source which may prevent it from turning on when in luminance detection mode, you can try moving SL5 away from the light source or covering the solar panel of SL5 which will also cover the luminance sensor;
	b) Make sure you hear a click sound when the button is pressed.
2. Why is the light of SL5 dim?	a) The brightness of the SL5 is controlled by its voltage, and the dim lighting is due to low power. Please charge it fully in sunlight before using it again.
	b) You can check the battery level of the SL5 through the AiDot App.



Possible Cause	Solution
3. Why don't all my SL5 lights turn on at the same time at night?	a) SL5 lights automatically light up when ambient light drops below 20 lux. Due to material and craftsmanship differences, it's normal for multiple lights to illuminate at different times. However, all lights are guaranteed to illuminate automatically within 15 minutes.

TIPS

1. Solar landscape spotlights offer various installation methods, including wall mounting and direct ground insertion. During installation, make sure to ensure that the solar charging panel is not obstructed in any way to ensure smooth charging operations and maintain excellent battery life.
2. To ensure you a longer battery life, we recommend for installing the solar light in a place with direct sunlight and no shade to let the solar spotlight fully charge for 48 hours before the first use, which let you enjoy your colorful yard better.

WARNING

FCC SDOC

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

NOTE 2: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Linkind

Our goal is to bring you the best shopping experience. If you have any questions about our product, please feel free to contact us. Our customer service is right here to resolve the case.

☎ 1 (877) 770-5727
(Mon.-Fri., 8:00AM-5:00PM(PT))
✉ service@linkind.com
🌐 <http://www.linkind.com>
Made in China



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

RoHS **CE**



Recycle

