Colderatti

Cold & Hot
32°F – 104°F

Hyperchiller™
superfast cooling

Automatic water
purification

Smartphone
controlled



Full body
immersion

Seats 4

Comfortable
surround benches

316L
stainless steel

A masterpiece of recovery technology.

Discover the Colderatti Bowl

Commercial Ready

- Commercial-grade cooling, filtration, and UL-listed components for continuous, high-demand use.
- VGB/ANSI 2017 dual main drains.
- Surface skimmer.
- 316L stainless steel construction.
- Optional: Automatic sanitizer dosing/ monitoring system.

Temperature Range: 32°F – 104°F

- Choose your ideal temperature.
- Experience cold or heat therapy.
- Generates ice glaciers at 32°F.

Superfast Cooling

- Cools at -10°F per hour.
- 4-8X faster than the latest commercial-grade systems.
- Smooth, quiet, and energy-efficient.
- Use the onboard control panel or your smartphone to adjust temperature.

Flexible Chiller Placement

- Place the chiller in a separate location from the tub and control wirelessly via smartphone.
- Remote locate up to 40 feet away, with 15 feet of vertical lift.

Reclined Full Water Immersion

- Fully submerge in the deep, spacious Bowl. Integrated surround benches comfortably seat 4.
- The reclined geometry supports your body in an ergonomic, restful posture for maximum relaxation.

Automatic Water Purification

- 4-stage commercial-grade system keeps your water clean & crystal clear using two particle filters, aeration, and precision ozone dosing.
- Dual-action filtration delivers full water column purity – a surface skimmer eliminates oils and floating debris, while floor intakes remove sunken particles.
- Creates an oxygen-rich, bacteria resistant environment for hands-free pure water.
- Always-on 24/7 continuous filtration.

Support, Service, and Financing

- 7-year warranty on structure, 2 year on components. Nationwide service.
- White glove delivery & setup available.
- Live U.S. based technical support.
- Home financing and commercial equipment lending with lowest rates available.

Specifications

Total Footprint with Chiller & Clearance	115" x 68" x 44" (LWH)
Tub Dimensions	64.0" x 64.0" x 43.7"
Capacity: Water Capacity: Daily Bather Load:	4 adults 280 gallons 100 bathers/day
Filtration	2.5x10", 20 Micron, NSF/ANSI
Water Turnover Rate	18.7 minutes
Electrical Requirements	240V 20-amp dedicated circuit
Weight Dry/Full	380lbs/2715lbs (tub) 130lbs (Veloce Engine)
Materials	316L stainless steel.
Chiller Power	2.0HP


Fast and Simple Maintenance:


- Quickly change filters, drain, and refill the tub.
- No assembly required, just connect water lines and get started.

Sales: (972) 213-1210 Email: welcome@colderatti.com colderatti.com

Get in touch

2026 Colderatti. All Rights Reserved

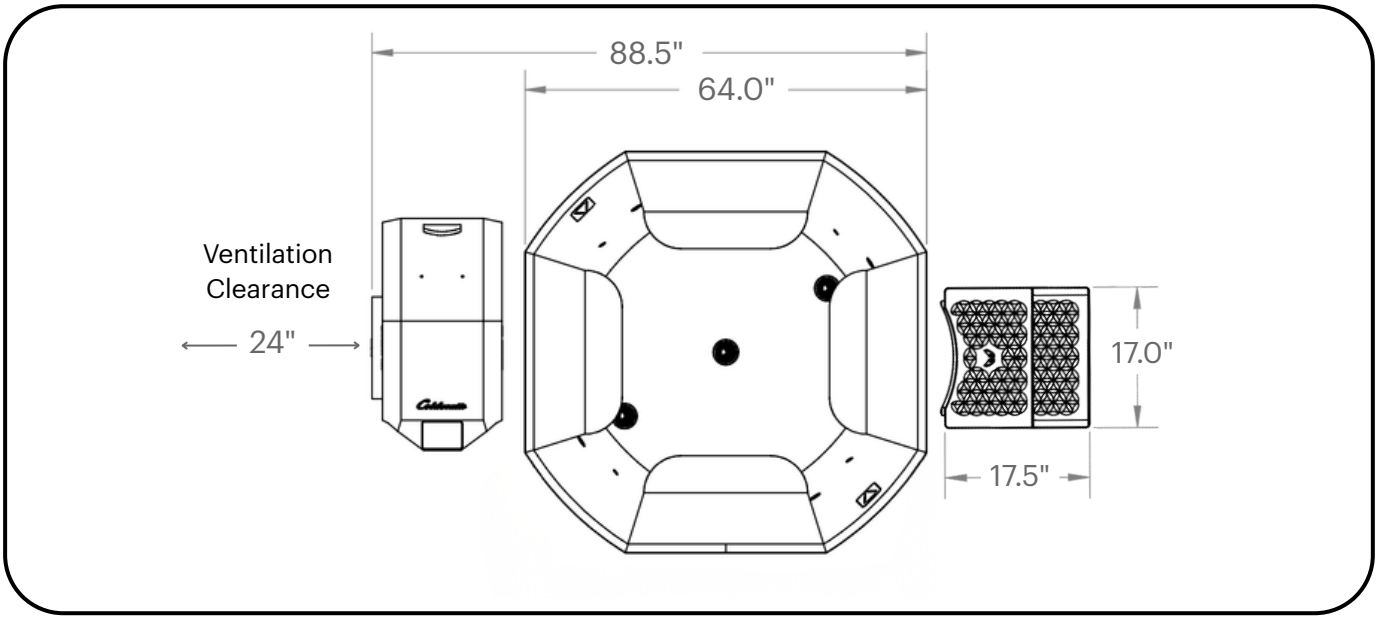

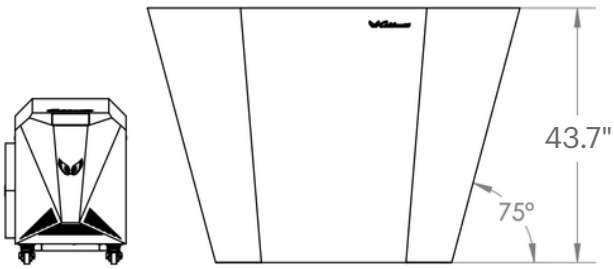



Details:

- Designed and Engineered by Colderatti in the USA.
- 316L stainless steel.
- Commercial 2.0 HP Veloce Engine.
- Cold/Hot (32–104°F) temperature control.
- High output ozone generator.
- Remote controlled.
- Freestanding design, fully portable.
- Suitable for in-ground or deck-surround installation.
- No plumbing required (fill/drain with standard hose).
- 240V / 20A GFCI protected. Requires 20A dedicated circuit.
- Safety: UL, NSF, CE, and ETL (Intertek) certified.

Hydraulic Connections:

Water OUT	→	To Veloce INLET
Water IN	→	To Veloce OUTLET
DRAIN	→	Optional DRAIN outlet. Allows routing to nearby floor drain or plumbing connection to sanitary septic line.
FILL	→	Optional FILL valve. Allows connection to water source.

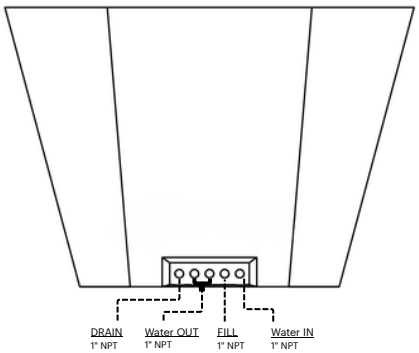



What's included

Bowl with Veloce Engine	**Included**
Insulated Press-Fit Cover	**Included**
Stainless Steel Step Stool	**Included**
Delivery Service	**Included**
Colderatti Care+ 7-Year Limited Warranty	**Included**
Auto-Sanitizer	**Add-On**
Water Care Kit - 7X filters, water clarifier	**Add-On**
Stainless Steel Care Kit - Clean, Polish, Protect	**Add-On**

All information in this document is the sole property of Colderatti.
Any reproduction or distribution without written permission from Colderatti is strictly prohibited.

Get in touch



