


尺寸: 70X100mm
 材质: 105G双铜+四色双面印刷+风琴折

100 mm
70 mm

Wireless Camera Clock

1. Thanks for your purchase and support, we appreciate all your valuable feedback.
 2. If you have any questions about our products, please feel free to contact us.
 Email: sztuweikeji@163.com



Before operating this unit, please read these instructions carefully and save them for future use.

AJCloud

Interface description

This manual is suitable for various types of cameras. The appearance may be different due to different functions. The details are subject to the receipt. This manual is only for the reference purpose of the series of equipment.




- Magnetic adsorption area
- Reset indicator green light
- Power on/off button
- Reset button
- Camera
- Alarm clock indicator light
- Charge lamp
- Set the +/- off screen button
- Set the +/- Brightness Settings button
- Time/year/month/day setting button
- Alarm clock setting button
- Alarm clock snooze button
- USB-C (5V/2A) charging input port
- SD card slot

Software installation

APP Download and Installation

Users can search "AJCloud" on APP store or Google Play, or scan the QR code below to install the APP.

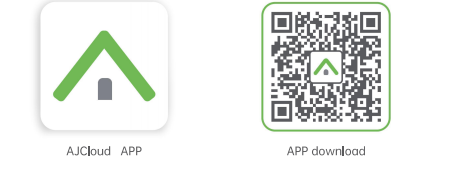

- Step 1: After the camera is powered on, open the "AJCloud" APP and click the "+" icon in the upper right corner to enter the interface of adding devices.
- Step 2: The APP will automatically search for nearby devices. Select the home WiFi network you need the camera to connect to, enter the password, and then click "Next".
- Step 3: After the network is configured successfully, the system prompts you to enter the device's name. Click "Next".

Or you can add camera by WiFi configuration

- Step 1: Open the APP, click the "+" icon or click the "Add device" button to enter the screen code interface.
- Step 2: Select the device type, select "IP Camera".
- Step 3: Select WiFi connection by QR code.
- Step 4: Check whether the device is powered on and has a prompt tone.
- Step 5: Select the WiFi that the camera needs to connect to, enter the password, and click "Next".
- Step 6: Point the camera at the QR code that appears on the screen of the phone.
- Step 7: After the network configuration is successful, set a name for the camera.

Bluetooth adding process with network

After the camera is powered on, open the "AJCloud" APP and click the "+" icon in the upper right corner to enter the interface of adding devices.

- Step 1: After the camera is powered on, open the "AJCloud" APP and click the "+" icon in the upper right corner to enter the interface of adding devices.
- Step 2: The APP will automatically search for nearby devices. Select the home WiFi network you need the camera to connect to, enter the password, and then click "Next".
- Step 3: After the network is configured successfully, the system prompts you to enter the device's name. Click "Next".

Help FAQ

Q1: Why is the pairing network unsuccessful?

- Make sure that the distance among the camera, the router and the mobile phone should be close enough when configuring the network.
- Make sure that the WiFi signal is strong enough.
- Make sure that the WiFi name and password are correct.
- Restart the camera and the router.

Q2: Why is there no playback?

- Make sure that the TF card has been inserted into the camera and try to turn on/off the camera.
- Enter the camera settings menu to check the storage status. In good condition, click the "Format" button to "Format the memory card".
- Make sure that the camera has enough storage space.

Q3: Why is the camera offline?

- Make sure that the camera has enough power.
- Make sure that the camera has been connected to the WiFi router.
- Whether the WiFi password has been changed, try to reset the camera and try pairing again.

Q4: Why my phone does not have an alarm push function?

- Check your mobile phone permission settings and make sure that you have granted the permission of "AJCloud" APP.
- Open your phone's Settings -> Apps and Notifications -> select Apps and Notifications Management respectively, find the "AJCloud" app and turn on all permissions.

Important Notice: To comply with local laws and regulations and protect user privacy, this device does not have a recording function.

Clock Function Introduction

- 4-digit LED display
- Time and date functions
- WiFi connection and automatic time synchronization
- Alarm function and snooze function
- Charge operation: → MODE, AL, SNOOZE, ON/OFF, RST
- Adjust brightness adjustment
- Automatic dimming (off/night)
- One-button screen-off function
- Auto-off function



Operating Instructions

In the power-off state, long press the ON/OFF key for 1 second to turn on the device and enter the time mode.

In the power-on state, long press the ON/OFF key for 1 second to turn off the device. When powered off, the clock function continues to keep time normally.

In the power-on state, long press the "R" key for 6 seconds to reset the time.




Alarm

In time mode, press the MODE key to display the date. In time mode, press the AL key to display Alarm 1 and Alarm 2. In time mode, press the "+" key to turn off the screen, and press any key to turn the screen back on.

In time mode, press the "-" key to adjust the brightness, which has 4 adjustable levels.


On Alarm Clock 1 or 2, the alarm time mode is displayed. Press and hold the AL key for 2 seconds to enter the alarm time setting. First, set the hour. The hour will flash. Press the "+"/- keys to adjust the hour. After setting the hour, press the AL key again to switch to setting the minute. The alarm rings for 60 seconds.

When the alarm rings, press the SNOOZE key to stop the alarm and enter a 5-minute snooze. Pressing any other key will cancel the snooze. When the alarm rings, pressing any other key will cancel the alarm. In off-screen mode, the screen will automatically turn on when the alarm rings.

Charging Indicator Instructions

Plug in the USB-A charging cable to charge and the device can be turned on. During charging, the green charging icon in the upper right corner flashes at 0.5Hz and the green light of the full charge indicator light remains constantly on. When working without a charging cable, the indicator light remains constantly white.



The charging light is green

Product Information

Product Name: Wireless Camera Clock
 Product Model: T101
 Product Features: Motion Detection, App Control, Night Vision, Remote viewing
 Resolution: 4K
 Charging time: 0-2A/Charging time approximately 4 hours
 Battery energy: 500mAh(18.5Wh/3.7V) (working hours 10-15 hours)
 Storage medium: MicroSD/TransFlash Card (TF card system format: FAT32)
 Wireless connection distance: 100M(Indoor/outdoor)
 Material: ABS
 Size: 162.8*98.8*25mm
 Weight: 210g

Product List

Wireless camera clock Power adapter Charging cable
 User Manual Magnetic fastening iron sheet

After Service

1. Thanks for your purchase and support, we appreciate all your valuable feedback.
 2. If you have any questions about our products, please feel free to contact us.
 Email: sztuweikeji@163.com

FCC Warning Statement: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

