


Wireless Smart Watch Pager Manual

I.Introduction

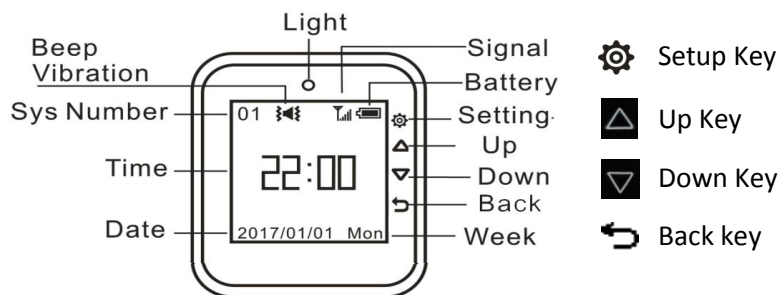

II.Features

1. TFT color screen with back light
2. Pop-up button on the side
3. Micro USB rechargeable
4. Pair max 500 wireless buttons, edited name for different buttons
5. 4 Working Modes for different needs: Beeping, vibrate, flashing/Mute
6. Black box function, save call records for query
7. Calendar display, shutdown is not lost time
8. Alarm Clock function
9. Power On/Off Timer
10. Password protection to prevent wrong operation
11. Innovative energy saving technology, super long standby time
12. Call range 150 -300m (open space)
13. Charging Time: 2.5h
14. Compatible with 1527 (150k – 470k resistance) and 2262 (1.5 M – 4.7 M resistance) all series accessories

III.How to Use

1.Power on/Power off

Power on: Hold[] for 3 seconds to turn on the pager (Power light will flash shortly)

Power off: Press any key to turn the screen, then hold[] for 3 seconds to, then press [] to turn off

2.Settings(16 sections)

2-1 Add buttons:

2-1-1: Press any key to turn the screen, Hold[] for 3 seconds to enter Settings.

2-1-2: Press[] to add buttons. When button line turns to "Trigger Button", Press the button and the button is paired. The third line will turn to "00X/00XPcs" (meaning, button number/total buttons paired)



2-2 Delete Buttons:

2-2-1: Press any key to turn the screen, Hold[] for 3 seconds to enter Settings.

2-2-2: Press[][] to choose the button number to delete, Press[] to delete it. When button line turns to "Trigger Button" (meaning button is deleted)



2-5 Prompt Setting: To choose the working mode from 4 different modes

2-6 Prompt Time: To set the times the alarm repeated after trigger

2-7 Screensaver: To set how long the pager screen turns off automatically

2-8 Language: To choose from English/Russian/French

2-13 Call Log: To check call log

IV.Other functions as a watch

2-3 Alarm Clock: To set alarm for specific time to alarm

2-4 Date & Time: To set the time right

2-9 Timer: To choose from English/Russian/French

2-10 Auto Clear Time: To set how long the paging log clear automatically

2-11 Timeout Prompt: To set how long the pager alarm again after no

2-12 Default Set: To return to default

2-14 About me: To check software version

V. Product Spec

1. Supply voltage: DC3.7V (Rechargeable battery) 400mAh Lithium

2. Charging time: 2.5h

3. Working current: <4mA

Standby current: <50μA

4. Working frequency: 433.92MHz

5. Call range: 300m (open space)

6. Ambient temperature: -20°C — 55°C

7. Product size: 45×40×15mm

(Not including watch strap)

8. Weight: 51g

VI. Troubleshooting

1. Press the transmitter, the watch does not respond?

1. The transmitter is not registered

2. The transmitter is lower battery

3. Airplane mode enabled