


RGBCW Ceiling Light

User Manual




RoHS

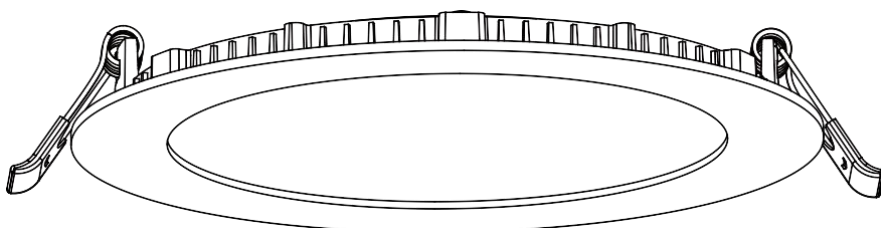


Packing List

Each luminaire includes:



RGBCW light x 1

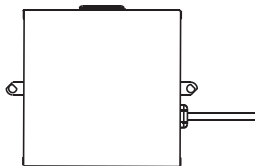

Conjunction box x 1



Connection cap x 1


Specification

Adapter Input	AC120V
Adapter Output	DC30V/0.45A
Power	12W
Color	RGBCW
Lumen(Per Light)	1200LM
CRI	≥90

Get Ready

- Know your Wi-Fi network and password.
- Make sure your mobile device is running iOS 14 or higher and Android 10 or higher.
- Make sure you're connecting to a 2.4GHz Wi-Fi network(can't connect to 5GHz networks).
- Make sure your phone's Bluetooth is turned on.

Dimension

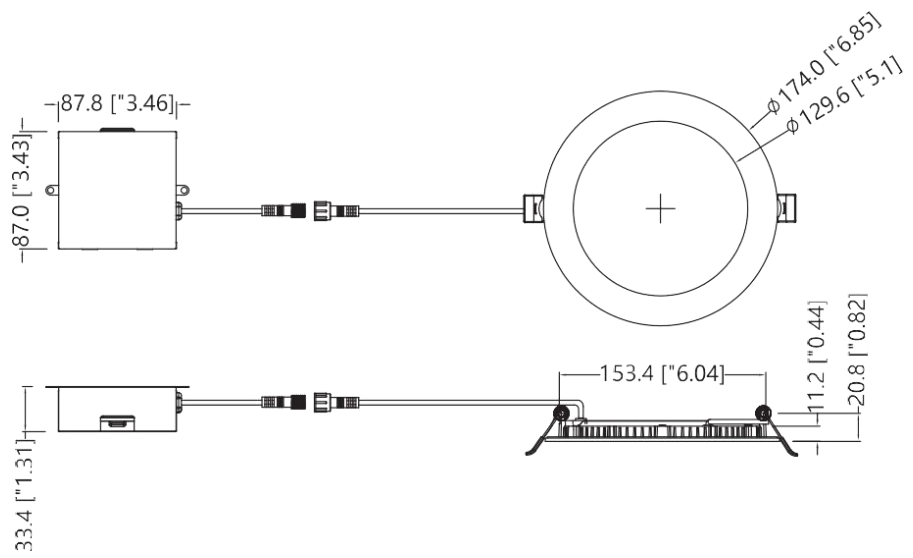

INSTALLATION INSTRUCTIONS

IMPORTANT:

Read all instructions before installing the fixture. Retain them for future reference.

SAFETY:

For your safety, this fixture must be installed in accordance with all applicable local electrical codes and ordinances. All electrical work must be performed by a qualified electrician.

WARNING:

Make certain the power is OFF at the electrical panel before beginning installation or performing any maintenance. For indoor use only.

PRE-INSTALLATION:

Turn OFF the power at the electrical panel before starting installation.

Locate a suitable position for the fixture and cut an opening in accordance with the cut-hole dimensions (refer to the Hole Cut Table for the appropriate size).

Run the electrical wire from the switch (power source) through the mounting hole.


DRIVER WIRING:

New construction applications: The hardwire box must be securely fastened to studs, joists, or other fixed structural members.


Remodel applications: The hardwire box does not need to be firmly secured to mounting plates, studs, joists, or structural members if they are already concealed.

Installation


1. Before installation, turn off the power at the circuit breaker to ensure safety.

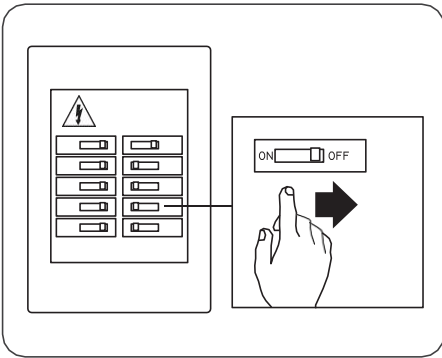


2. Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter.

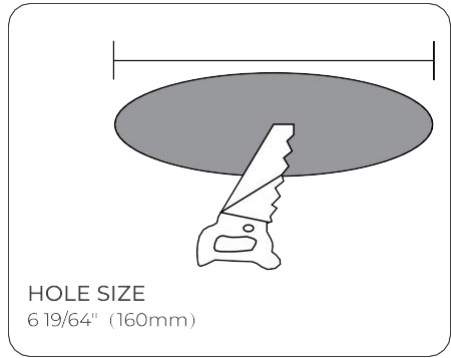

3. Insert the wires from the conjunction box into the lamp terminals and

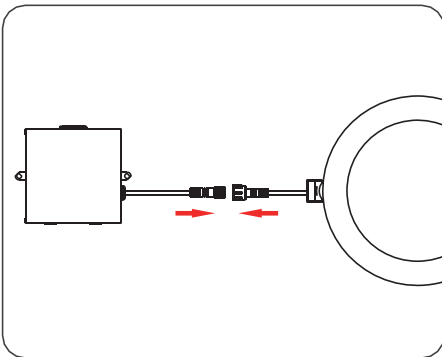


4. Open the swing cover of the conjunction

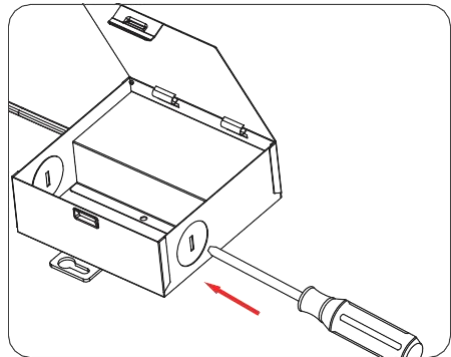


Make the following wire connections using 3 wire connectors:

- a. Connect the cable's green ground wire to the box's green ground wire
- b. Connect the white (neutral) wires together
- c. Connect the black (hot) wires together


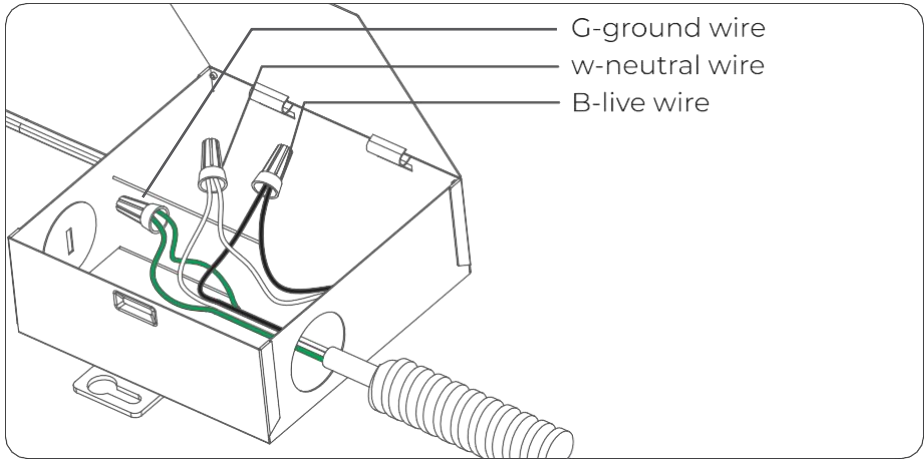


1. Insert conjunction box through the mounting hole and secure it, connect the fixture power cable to the conjunction box.

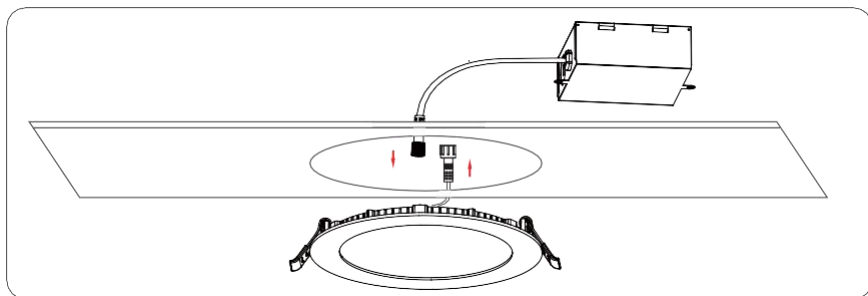


2. Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.

3. Turn on the power after installation, check the fixture can work well.



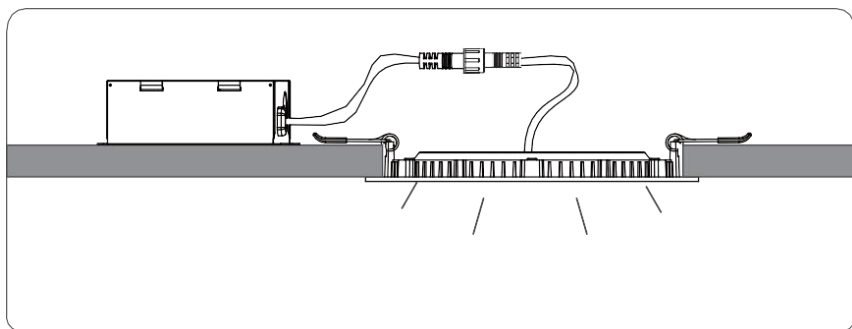
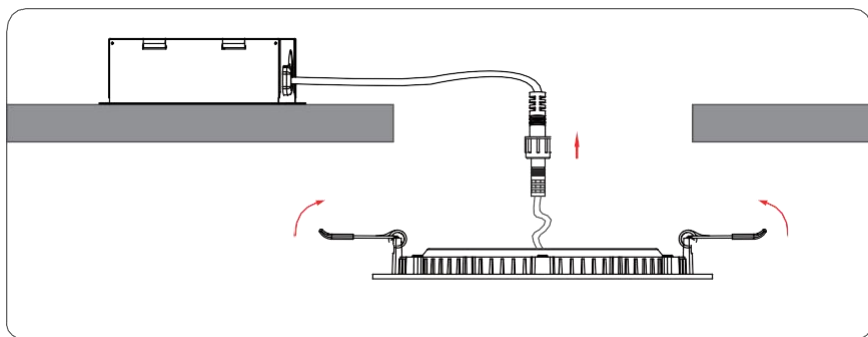


Download and install the app,then sign in or create an account.





How to use Smart Life

- 1. Open the app, Tap "Log in with Password" and go to the Register page.
- 2. Enter your phone number or email and enter the verification code, then set a password.

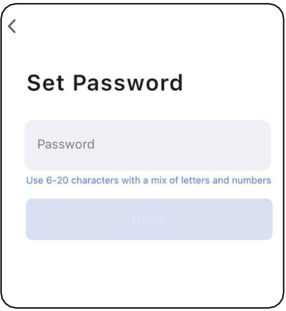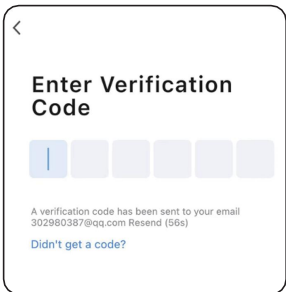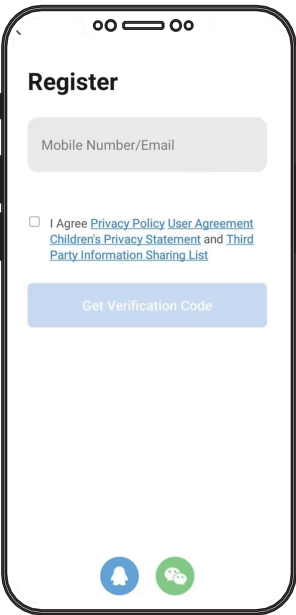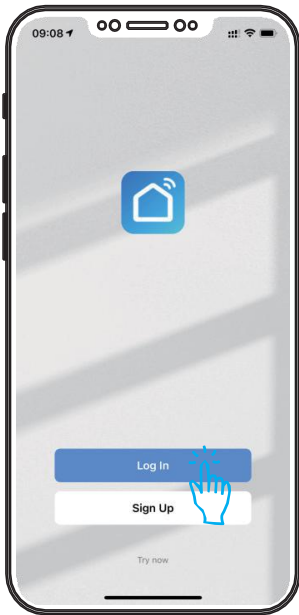

3. Log in with the phone number and the password you just set. Tap "add device" to add DeerTalk RGBCW ceiling light.Wait for successful connection.

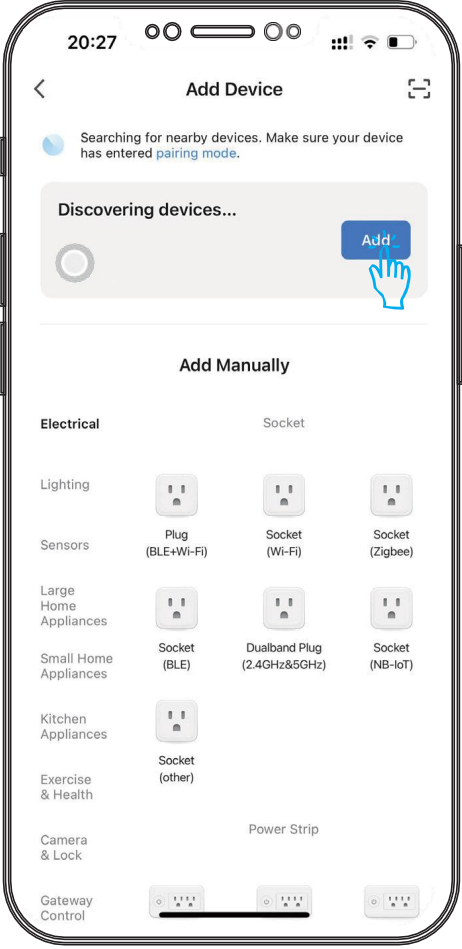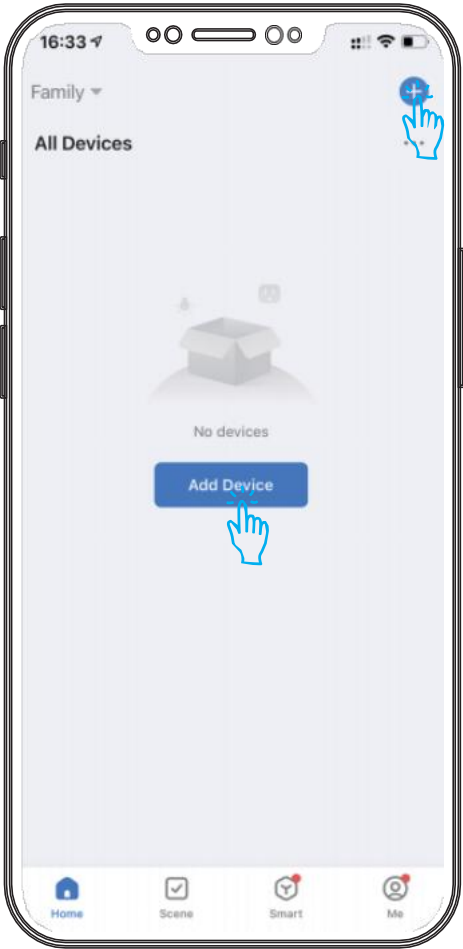

4. Tap the switch button to turn the light on or off, and tap the product icon to enter the detailed control interface.



5. You can adjust the color and color temperature of the light.





! Notice

1. Advised to enable Bluetooth, Enable Bluetooth to add some Wi-Fi device easily;
2. Each time the device without distribution network is powered on, confirm the light is breathing or blinking pairing mode;
3. Open the App, In the top corner of the Devices screen, click "+" and select "Add Device" to confirm that the device is paired. (To delete a device, long-press the icon, then tap the "-" button in the upper corner.)


If the device cannot be found on the "Add Device" page, please ensure that the device cables are properly connected, then toggle the power switch five times to reset the device.;

4. If the Wi-Fi connection fails, please confirm that you are connected to a 2.4 GHz wireless network, as the device does not support 5 GHz networks.



1. Tap the pen icon in the upper-right corner.
2. Tap "Create Group."

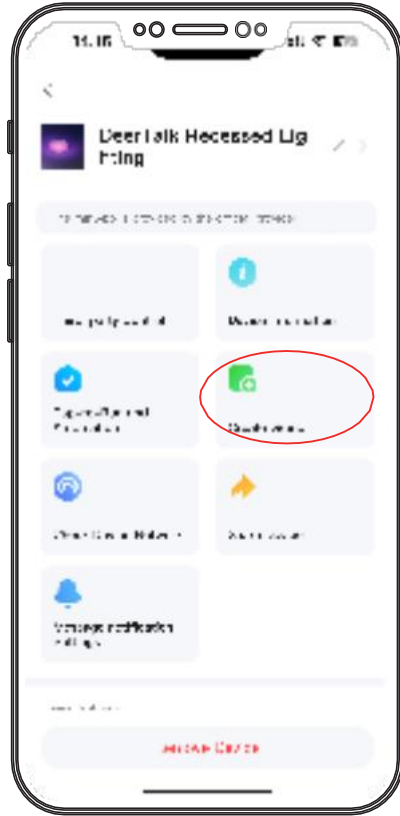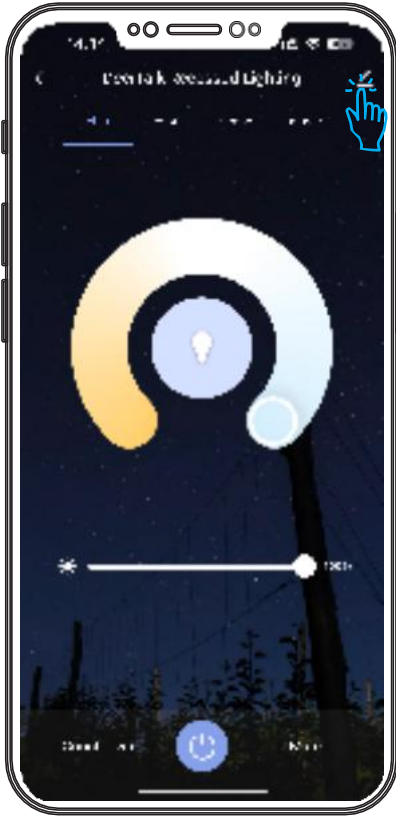


3. Tap the green "+" icon to add devices you want to include in the group (it is not recommended to add devices of different types, as this may lead to inconsistent control behavior), then tap the "Save" button in the upper-right corner.
4. Name the group, select the room location for the group, and then tap the "Finish" button.

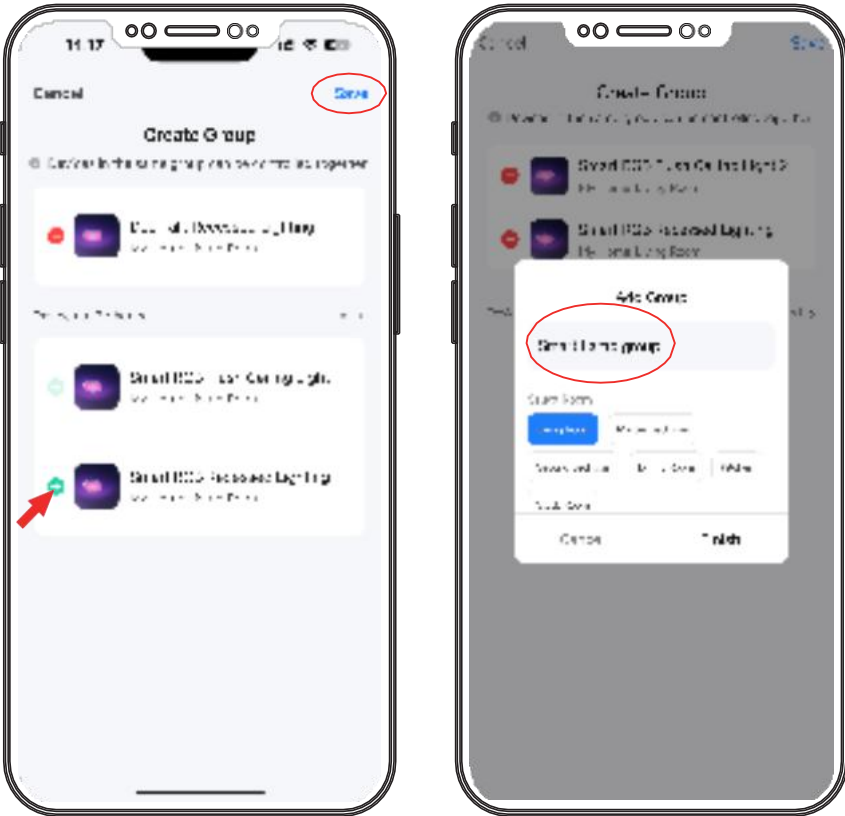


5. The main control screen will display the group you have set up, Tap the switch button to turn the group on or off, and tap the group icon to enter the detailed control interface.
6. On the Me page, tap the Alexa icon.

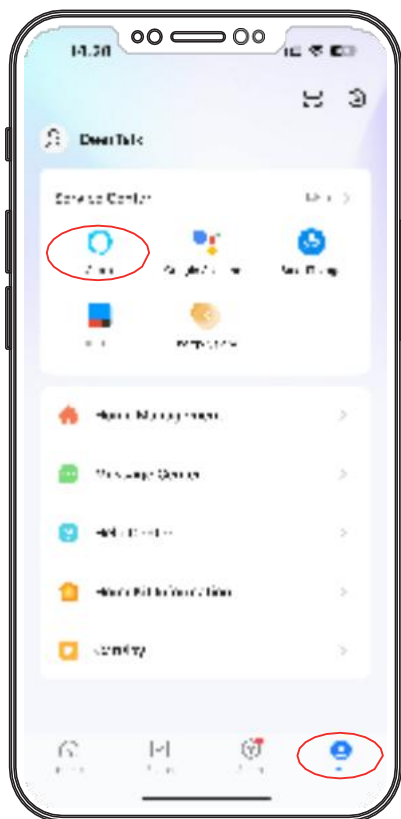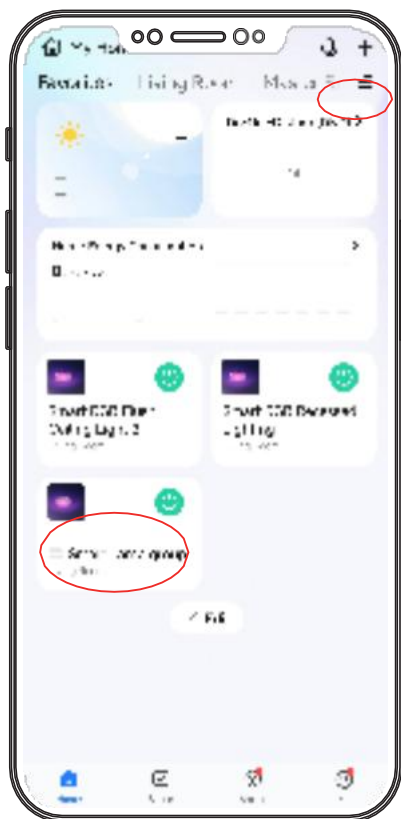

- 7. Tap "Link to Amazon Alexa" button.
- 8. The page will redirect to the Amazon website; please log in to your Amazon account following the on-screen instructions.

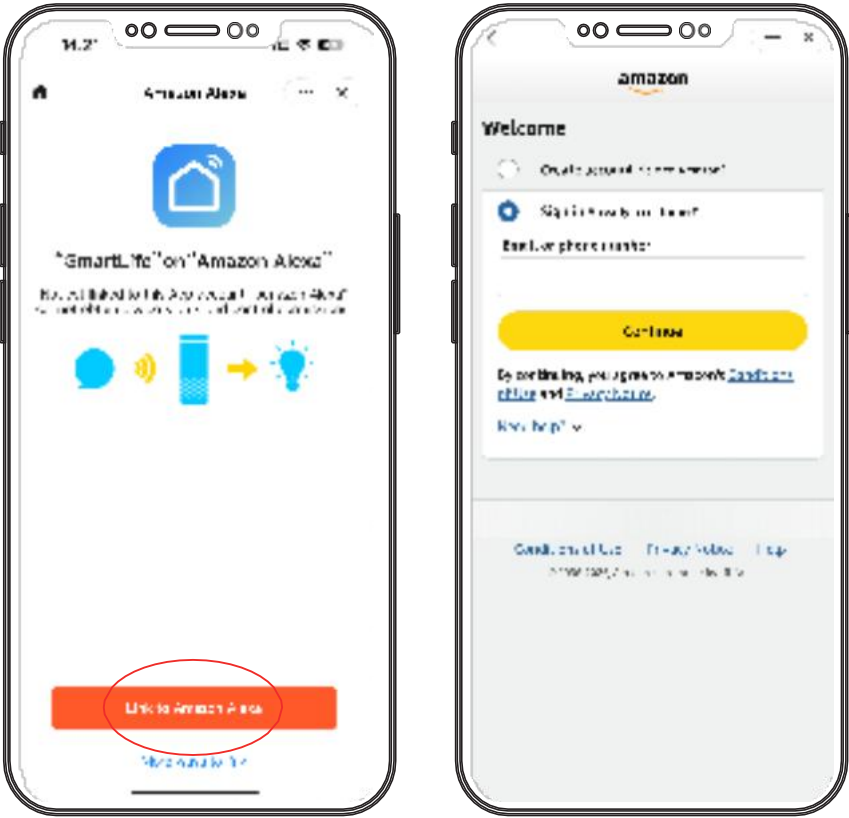

9. Tap "Allow"
10. Alexa connection is complete. You can now control your devices using Alexa voice commands.

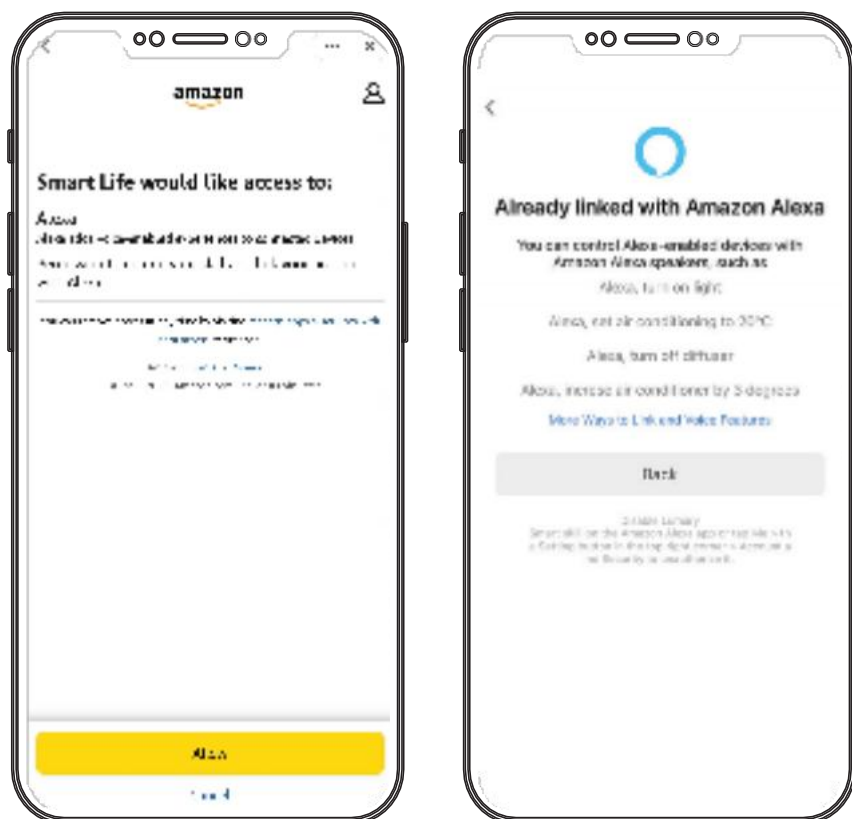

If you wish to connect to other voice control platforms such as Google Assistant, you can complete the integration by following similar setup steps.

Notice

- (1) Please read the specification first, to make sure the service environment matches the condition in the specification before using.
- (2) Please confirm the applicable power supply before using.
- (3) Make sure the switch of product is off before connect to the power supply to prevent electric shock.
- (4) Operation against rules may damage your property even harm to your personal safety.
- (5) Preliminarily estimate required quantity of LED panel lights, then according to the power rating of single panel light to figure out the total power and design power supply plan.
- (6) Dangerous high voltage, Non-professionals are not allowed to maintain the products.

Customer Support & Warranty Information

Contact Us

If you encounter any issues with your RGB ceilinglight or need assistance, please contact our customer service team:

Email: service@decktok.com

Service Hours: Mon-Fri 9:00 AM - 6:00 PM (GMT+8)

Warranty Coverage

- This product is covered by a 3-year limited warranty against manufacturing defects.
- Proof of purchase is required for warranty claims.
- Damage caused by improper installation, misuse, or unauthorized modifications is not covered.