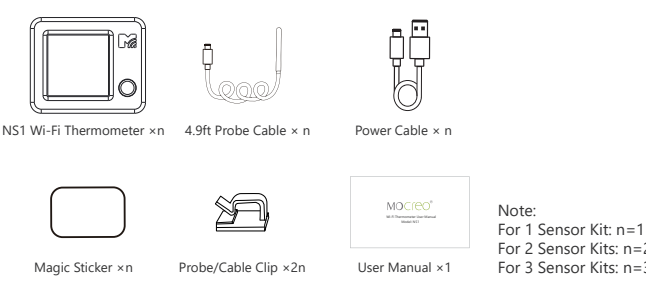
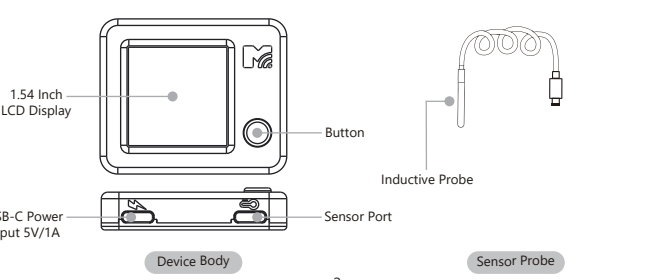

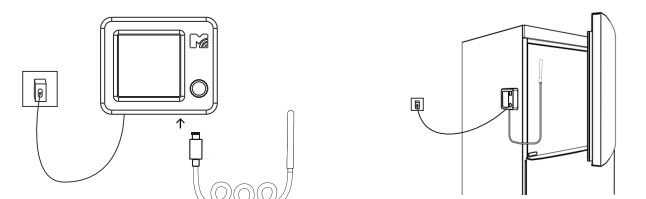
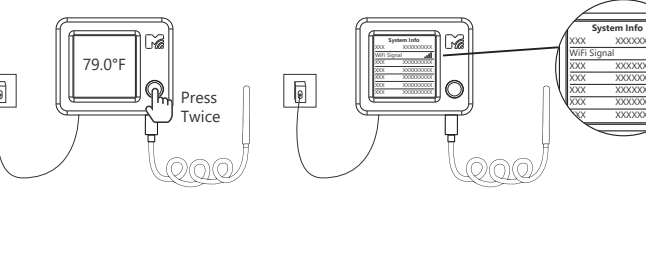
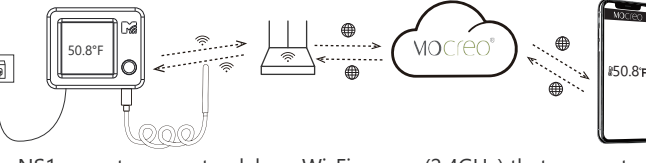

 <p>Wi-Fi Thermometer User Manual Model: NS1</p>	<h3>Introduction</h3> <ul style="list-style-type: none"> Clear Color Display: The NS1 Wi-Fi Thermometer features a color IPS LCD for instant, at-a-glance temperature readings. Use the device button to easily toggle through historical data and device information. Dual Alert Notifications: Receive immediate alerts via App push notifications and/or email whenever environmental conditions change, keeping you informed anytime, anywhere. Wide Temperature Range: Accurately detects temperatures from -40°F to 221°F (-40°C to 105°C). Versatile Waterproof Probe: Equipped with a 4.9-foot (1.5-meter), ultra-thin waterproof external probe. Ideal for monitoring conditions in refrigerators, freezers, bathtubs, fish tanks, and various other environments. 	<h3>What's in the Box</h3>  <p>Note: For 1 Sensor Kit: n=1 For 2 Sensor Kits: n=2 For 3 Sensor Kits: n=3</p>	<h3>Hardware Overview</h3> <p>(1) NS1 Wi-Fi Thermometer</p> 	<h3>Specifications</h3> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Specification</th> </tr> </thead> <tbody> <tr> <td>Button</td> <td>1 physical button</td> </tr> <tr> <td>Display</td> <td>1.54-inch IPS LCD</td> </tr> <tr> <td>Display Resolution</td> <td>240 × 240 pixels (non-touch)</td> </tr> <tr> <td>Wi-Fi Connectivity</td> <td>2.4 GHz band (802.11 b/g/n) 5 GHz not supported</td> </tr> <tr> <td>Bluetooth</td> <td>Bluetooth Low Energy (BLE) 5.0</td> </tr> <tr> <td>Dimensions (L × W × H)</td> <td>2.07 × 1.72 × 0.46 inches</td> </tr> <tr> <td>Weight (with probe)</td> <td>3.6 oz (103 g)</td> </tr> <tr> <td>Probe Temperature Range</td> <td>-40°F to 221°F (-40°C to 105°C)</td> </tr> <tr> <td>Temperature Accuracy</td> <td>±0.9°F (±0.5°C) within 14°F to 185°F (-10°C to 85°C)</td> </tr> <tr> <td>Power Requirements</td> <td>5V/1A USB power adapter (not included)</td> </tr> </tbody> </table>	Parameter	Specification	Button	1 physical button	Display	1.54-inch IPS LCD	Display Resolution	240 × 240 pixels (non-touch)	Wi-Fi Connectivity	2.4 GHz band (802.11 b/g/n) 5 GHz not supported	Bluetooth	Bluetooth Low Energy (BLE) 5.0	Dimensions (L × W × H)	2.07 × 1.72 × 0.46 inches	Weight (with probe)	3.6 oz (103 g)	Probe Temperature Range	-40°F to 221°F (-40°C to 105°C)	Temperature Accuracy	±0.9°F (±0.5°C) within 14°F to 185°F (-10°C to 85°C)	Power Requirements	5V/1A USB power adapter (not included)	<h3>(2) NS1 Button Instructions</h3> <table border="1"> <thead> <tr> <th>Button Action</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Short Press</td> <td>Cycle to next display page</td> </tr> <tr> <td>Press & Hold for 5 seconds</td> <td>Enter Setup Mode</td> </tr> <tr> <td>Press & Hold for 5 seconds (while in Setup Mode)</td> <td>Exit Setup Mode</td> </tr> <tr> <td>Press & Hold for 15+ seconds</td> <td>Restore Factory Default Settings</td> </tr> </tbody> </table>	Button Action	Result	Short Press	Cycle to next display page	Press & Hold for 5 seconds	Enter Setup Mode	Press & Hold for 5 seconds (while in Setup Mode)	Exit Setup Mode	Press & Hold for 15+ seconds	Restore Factory Default Settings
Parameter	Specification																																				
Button	1 physical button																																				
Display	1.54-inch IPS LCD																																				
Display Resolution	240 × 240 pixels (non-touch)																																				
Wi-Fi Connectivity	2.4 GHz band (802.11 b/g/n) 5 GHz not supported																																				
Bluetooth	Bluetooth Low Energy (BLE) 5.0																																				
Dimensions (L × W × H)	2.07 × 1.72 × 0.46 inches																																				
Weight (with probe)	3.6 oz (103 g)																																				
Probe Temperature Range	-40°F to 221°F (-40°C to 105°C)																																				
Temperature Accuracy	±0.9°F (±0.5°C) within 14°F to 185°F (-10°C to 85°C)																																				
Power Requirements	5V/1A USB power adapter (not included)																																				
Button Action	Result																																				
Short Press	Cycle to next display page																																				
Press & Hold for 5 seconds	Enter Setup Mode																																				
Press & Hold for 5 seconds (while in Setup Mode)	Exit Setup Mode																																				
Press & Hold for 15+ seconds	Restore Factory Default Settings																																				

<h3>Setup</h3> <ol style="list-style-type: none"> Power On Your Device <ul style="list-style-type: none"> Connect the NS1 to a 5V/1A (or higher) USB power adapter. Note: The power adapter is not included. Choose Your Usage Mode <ul style="list-style-type: none"> Use Without Network (Offline Mode) <ul style="list-style-type: none"> If you prefer not to connect to the internet, simply press and hold the device button for 5 seconds to enter or exit Setup Mode as needed. Note: The NS1 Sensor cannot be monitored remotely or use online alert features when operating in offline mode. 	<h3>Use With Network (Recommended)</h3> <ul style="list-style-type: none"> Download the MOCREO Smart app via Google Play, Apple App Store, or by scanning the QR code below.  <ul style="list-style-type: none"> Open the app and register an account if you haven't already. Registration is required to access all features. Follow the in-app instructions to add your NS1 device and complete the setup. 	<h3>Installation</h3> <p>Position the NS1 in close proximity to your Wi-Fi router and at an elevated location within the same space, avoiding major physical barriers and electronic interference sources for optimal performance.</p> 	<h3>Test the Effective Distance</h3> 	<h3>How the System Works</h3>  <p>The NS1 operates as a standalone Wi-Fi sensor (2.4GHz) that connects directly to your router. Its signal strength varies with environmental obstacles and distance, while cloud-enabled connectivity allows global data access via the MOCREO Smart App after initial setup.</p>	<h3>Calibration</h3> <p>Factory Calibration The NS1 undergoes precision instrument calibration during manufacturing, ensuring measurement accuracy within certified tolerances (±0.9°F). Recalibration is typically unnecessary throughout the product lifecycle.</p> <p>Thermal Stabilization When transitioning between environments with >18°F (10°C) temperature differentials (e.g., freezer to room):</p> <ul style="list-style-type: none"> Allow 15-20 minutes for thermal equilibrium Displayed readings will gradually converge to ambient temperature This hysteresis is inherent to all thermal sensors
---	---	--	--	---	---

<h3>Calibration</h3> <p>Manual Adjustment To compensate for installation-specific variations:</p> <ol style="list-style-type: none"> Navigate: App > Sensor List > NS1 > Settings > Calibration Apply offset values (±9°F max adjustment) Changes take effect in real-time <p>Best Practice: Verify calibration against NIST-traceable thermometer in stable environments. Note: MOCREO does not issue temperature calibration certificates at purchase.</p>	<h3>Precautions</h3> <p>To ensure the normal use of the product, please pay attention to the following situations:</p> <ul style="list-style-type: none"> It is recommended to install the NS1 in a high place. Do not expose the device to high temperatures, humidity, or dusty environments. Do not place the device near flammable materials. Do not put heavy objects on the device or use it as a support. Children should not use the device without adult supervision. 	<h3>FCC Statement</h3> <p>FCC ID : ZBFZL-NS1 This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:</p> <ul style="list-style-type: none"> This device may not cause harmful interference This device must accept any interference received, including interference that may cause undesired operation. <p>Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>Note: This equipment has been tested and found to comply with the limits for a Class B digital device, according to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses</p>	<h3>FCC Statement</h3> <p>and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.</p> <p>However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> Increase the separation between the equipment and the receiver. Consult the dealer or an experienced radio/TV technician for help. Connect the equipment to an outlet on a circuit different from that to which the receiver is connected. 	<h3>Warranty</h3> <p>MOCREO products enjoy a 12-month limited warranty (starting from the date when the customer receives the product), which applies only to hardware components of the device that are not subject to accident, misuse, neglect, fire, or other external causes, alterations, or repair.</p> <h3>Disclaimer</h3> <p>The contents about how to use the product and the App guidance are only for reference, please refer to the actual situation for specific applications. If there is something different from the instructions during using the product, please contact MOCREO Support for updates. This product is for detecting and monitoring only, MOCREO is not responsible for any property damage or other consequences of the use of this product.</p>	<h3>Customer Service</h3> <p>https://doc.mocreo.com/ help@mocreo.com</p> <p>YouTube <input type="text" value="MOCREO"/></p> <p>Search [MOCREO] on YouTube to watch the setup video tutorials.</p>  <p>User Guide Manual</p>
--	---	--	---	--	--

