

USER MANUAL




English

Download latest drivers
and firmware here:

darkproject.eu/drivers

How to Connect

The keyboard can be used with personal computers equipped with USB ports.

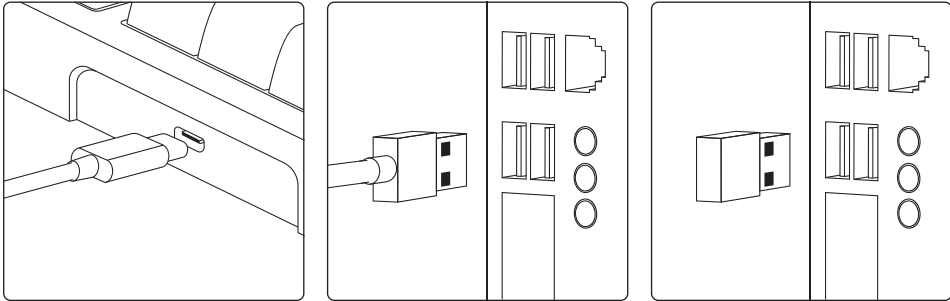


It is better to connect the keyboard when the computer is turned off.



WE STRONGLY ADVISE AGAINST CHARGING THE
DEVICE DIRECTLY FROM THE POWER GRID.

Care and Safety

If for any reason you spilled liquid on the keyboard, **IMMEDIATELY** shut it down and dry it for 48 hours.
It is not recommended to use high temperatures for drying keycaps and other plastic parts.

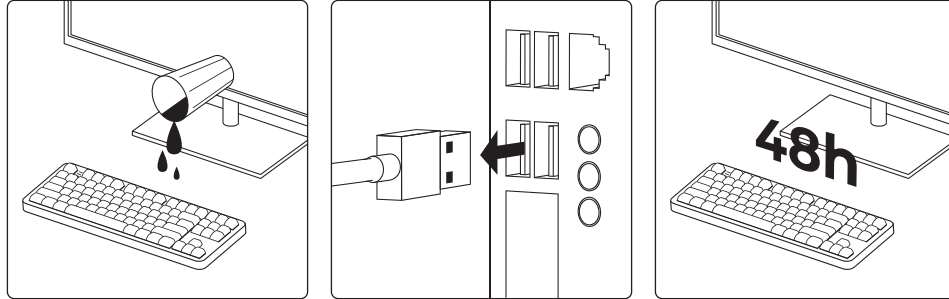

It is better to connect the keyboard when the computer is turned off.




Although this does not impact the warranty, please
make sure you take good care of your keyboard.

2.4G/Bluetooth Switching (for wireless models)

Three-Position Power Switch Modes:

- Bluetooth Mode:** Toggle switch to the right.
- Wired Mode:** Toggle switch to the middle.
- 2.4G Mode:** Toggle switch to the left.



Bluetooth Device Selection Keys

Fn+1/2/3: Connect to Bluetooth Device No. 1/2/3

Wired Mode Operation

- The toggle switch must be in the middle position to enable wired mode.
- When the Type-C cable is plugged in while the switch is in the wireless position, the device will only charge and will not switch to wired mode automatically.

Bluetooth Pairing Instructions (for wireless models)

- Set the toggle switch to the right to enable Bluetooth mode.
- Use Fn+1/2/3 to switch between Bluetooth channels.
- To pair a device:
 - Press Fn+1/2/3 for 3 seconds. The corresponding key will flash blue rapidly, indicating pairing mode.
 - Once paired, the key will flash blue for 2 seconds and return to the previous lighting effect.
 - If pairing is not completed within 3 minutes, the backlight turns off, and pairing mode ends. Repeat the process to re-enter pairing mode.
- If the connection is lost, the key will flash blue slowly for 30 seconds while trying to reconnect. If the reconnection fails, the backlight will turn off, and blinking will stop.

2.4G Mode Pairing Instructions (for wireless models)


- Set the toggle switch to the left position to enable 2.4G mode.
- The key for 2.4G mode (Fn+4) will flash green slowly (the backlight will stop blinking after 30 seconds if not paired).
- To pair:
 - Disconnect the dongle from the device.
 - Press and hold Fn+4 for 3 seconds. The key will flash green rapidly, indicating pairing mode.
 - Insert the dongle into the PC.
 - Place the keyboard as close to the dongle as possible.
 - Once paired, the key will light green for 2 seconds and then return to the previous lighting effect.
- If the connection is lost, the key will flash green slowly for 30 seconds while trying to reconnect. If the reconnection fails, the backlight will turn off, and blinking will stop.

Software

- Plug the USB connector from your keyboard into any free USB port.
- Boot your computer and connect to the internet.
- Navigate to **darkproject.eu** to access the online web software for your keyboard setup.

Switching Win/Mac Mode (if applicable)

- Win Mode:** Toggle switch to the left.
- Mac Mode:** Toggle switch to the right.



For wired models:

- Win Mode:** Press and hold FN + W for 3 seconds.
- Mac Mode:** Press and hold FN + M for 3 seconds.

Hotkeys (Windows)

Fn + F1	My Computer	Fn + F11	Volume -
Fn + F2	E-mail	Fn + F12	Volume +
Fn + F3	Windows Search	Fn + Win	Lock Win key
Fn + F4	Browser	Fn + S	Snap Tap toggle
Fn + F5	Calculator	Fn + B	Battery charge (wireless keyboards)
Fn + F6	Multimedia	Fn + P	Launch Web driver
Fn + F7	Previous Track	Fn + Del	Press Fn + Del for 3 seconds to restore factory settings
Fn + F8	Pause/Play	Fn + Print	Backlight Toggle
Fn + F9	Next Track	Fn + +/-	Backlight + / Backlight -
Fn + F10	Mute	Fn + +/-	Backlight speed + / Backlight speed -
Fn + R_Shift	Switch Light Effects	Fn + Enter	Switch main backlight color effect

Extra NumPad keys functions



- F13** – Calculator
- Mute** – Mute
- Volume down** – Volume down
- Volume up** – Volume up

When the FN key is held down,
keys with combination functions
will light up according to the color
mapping below as a visual indication.

Hotkeys (macOS)

Fn + F1	Display brightness -	Fn + F11	Volume -
Fn + F2	Display brightness +	Fn + F12	Volume +
Fn + F3	Task Center	Fn + CMD	Lock Command key
Fn + F4	Search	Fn + S	Snap Tap toggle
Fn + F5	N/A	Fn + B	Battery charge (wireless keyboards)
Fn + F6	N/A	Fn + P	Launch Web driver
Fn + F7	Previous Track	Fn + Del	Press Fn + Del for 3 seconds to restore factory settings
Fn + F8	Pause/Play	Fn + Print	Backlight Toggle
Fn + F9	Next Track	Fn + +/-	Backlight + / Backlight -
Fn + F10	Mute	Fn + +/-	Backlight speed + / Backlight speed -
Fn + R_Shift	Switch Light Effects	Fn + Enter	Switch main backlight color effect

Extra NumPad keys functions



- Mute** – Mute
- Volume down** – Volume down
- Volume up** – Volume up

DISPOSAL INFORMATION

The crossed-out wheelee-bin symbol means that you must not dispose of this product together with unsorted household waste. As electrical devices can contain harmful substances which may cause environmental damage or harm to your health if not disposed of correctly, please dispose of these products separately. As the end user, you are required by law to dispose of used electrical equipment at an official recycling point. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. By disposing of electrical products at an official recycling point, you are doing your part to ensure equipment is recycled correctly and professionally, and the environment is protected. Wherever possible, remove any batteries before disposing of the device. Under law, as the end user you face risk of penalties if you dispose of devices and batteries illegally.

IMPORT INFO

Purpose of product: computer accessory
Connection: 1 x USB
Product material: plastic/metal/rubber
Used for: entering information into a personal computer
Please check with your local authorities for shipping regulations before shipping.
Manufacturer:
Dark Project LLC Profiti Ilias 4, 102, KIBG, Germasogeia Municipality, Limassol, 4046, Cyprus.
Importers:
EU Importer: FS-Holding Ltd. Profiti Ilias 4, Germasogeia, Limassol, Cyprus. 4046. E-mail: care@fragstore.com Tel: +35 725 26 01 66
UA Importer: ТОВ "ФС Дистрибушн" вул. Чавдар Єлизавети, будинок 13, Н/П 394А, 02072, Київ, Україна.
E-mail: distribution@fs-d.com.ua Tel: +38 044 592 4990
The importer is responsible for processing claims from buyers.
U.S. Responsible Party (PCC): MIRAMONT SOLUTIONS LLC, 19 GEORGETOWN, IRVINE, CA 92612, USA. FRN:0036313369.
Phone: +1 (951) 401-3633. Contact Person: Wenyi Wang
USA Distributor: Dark Project HK Limited

Made in China. Date of manufacture: indicated on the package. Serial number: indicated on the package.

Correct Disposal of This Product (Waste Electrical & Electronic Equipment, Applicable in the European Union and other European countries with separate collection systems). This marking shown on the product or its documentation indicates that it shouldn't be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of waste and recycle it responsibly to promote sustainable re use of material resources. Household users should contact either the retailer from whom they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

Statement of compliance with EU Directive
Hereby, Dark Project LTD, declares that this keyboard follows the requirements and other relevant provisions of Directive 2014/30/EU and 2015/863/EU.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.