

WARNING: TO BE INSTALLED AND/OR USED IN ACCORDANCE WITH APPROPRIATE ELECTRICAL CODES AND REGULATIONS. IF YOU ARE NOT SURE ABOUT ANY PART OF THESE INSTRUCTIONS, CONSULT A QUALIFIED ELECTRICIAN.

WARNING: USE THIS DEVICE ONLY WITH COPPER OR COPPER CLAD WIRE. WITH ALUMINUM WIRE USE ONLY DEVICES MARKED CU/AL.

NOTE: If the device surface is marked with WR, both indoor and outdoor use are acceptable. Otherwise it should be indoor use only.

FOR SEPARATE FEED CONVERSION ONLY: This device is provided with break-off fins located between the terminal screws. To control the top outlet and the bottom outlet with two different hot wires (two circuits), remove the break-off fin between the two HOT terminal screws (brass or black) before wiring. Use needle nose pliers and bend fin back and forth until it breaks off.

1. WARNING: TO AVOID FIRE, SHOCK, OR DEATH; **TURN OFF POWER** AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!

2. Connect wires per WIRING DIAGRAM as follows:

For Side Wire:

Remove approximately 3/4" (1.9 cm) insulation from wire. Loop wires clockwise 3/4 turn around terminal screws. BLACK (Hot) wire to BRASS screw, WHITE (Neutral) wire to SILVER screw, GREEN or BARE (Ground) wire to GREEN screw. Firmly tighten screws over wire loops. Terminal screws accept up to #12 AWG copper or copper clad wire.

For Push Wire:


NOTE: Push-in terminals accept #14 AWG solid copper wires on 15A branch circuits ONLY! For circuits with #12 AWG solid copper or copper clad wires, use terminal screws instead.

Remove approximately 5/8" (1.6 cm) insulation from wire. Push neutral wire (white) into the bottom of the round wire hole marked WHITE WIRE. Push hot wire (black) into the bottom of the round wire hole marked HOT WIRE. This device must be properly grounded for electrical shock protection. Connect green or bare grounding wire to the green-colored terminal screw.

If the receptacle must be replaced or rewired after it is push wired, gently press the tip of a small screwdriver in the release slot and back the wire out gradually.

If the receptacle or push-in terminal become damaged, do not reuse.

3. Mount device in wall box with screws provided and mount wall plate.
4. Restore power at circuit breaker or fuse. Installation is complete.

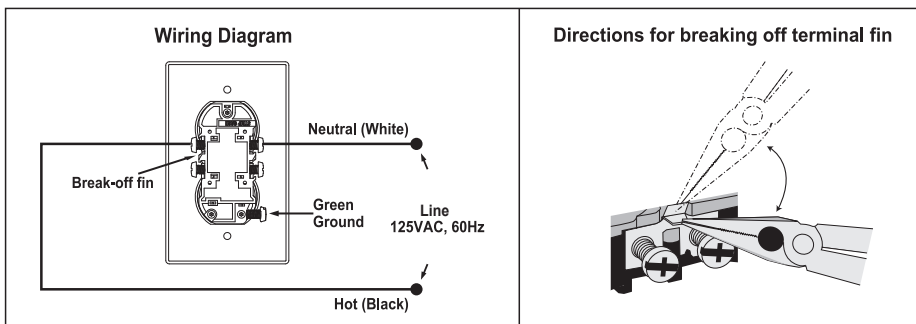

ELE GROUP CO., LTD

NO.158 CHUANGYUAN ROAD, SIP SUZHOU, JIANGSU, CHINA 215125
WWW.ELEGRP.COM

