


At a Glance

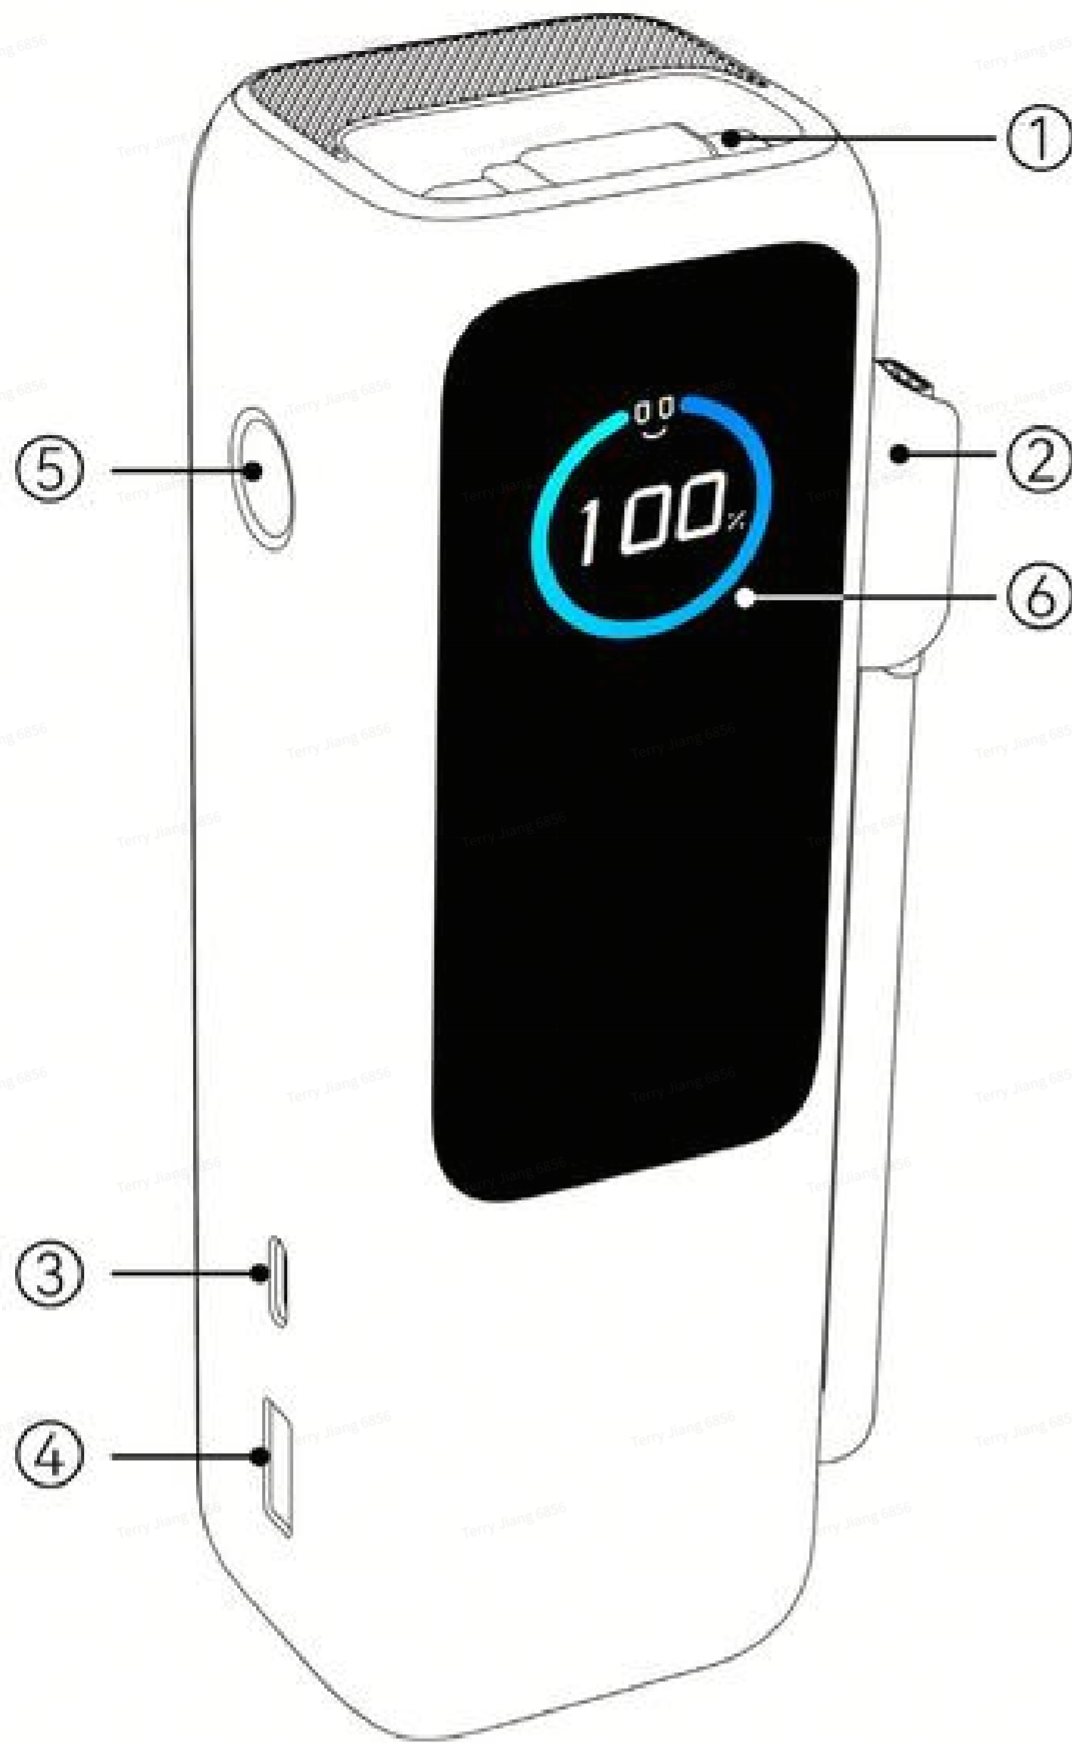


- ① Retractable Built-In USB-C Cable (USB-C1)
- ② Non-Retractable Built-in USB-C Cable (USB-C2)
- ③ USB-C Port (USB-C3)
- ④ USB-A Port
- ⑤ Power Button
- ⑥ Main Screen


How to Use the Built-In USB-C Cables

Retractable Built-In USB-C Cable (USB-C1)


Pull the cable to the desired length.

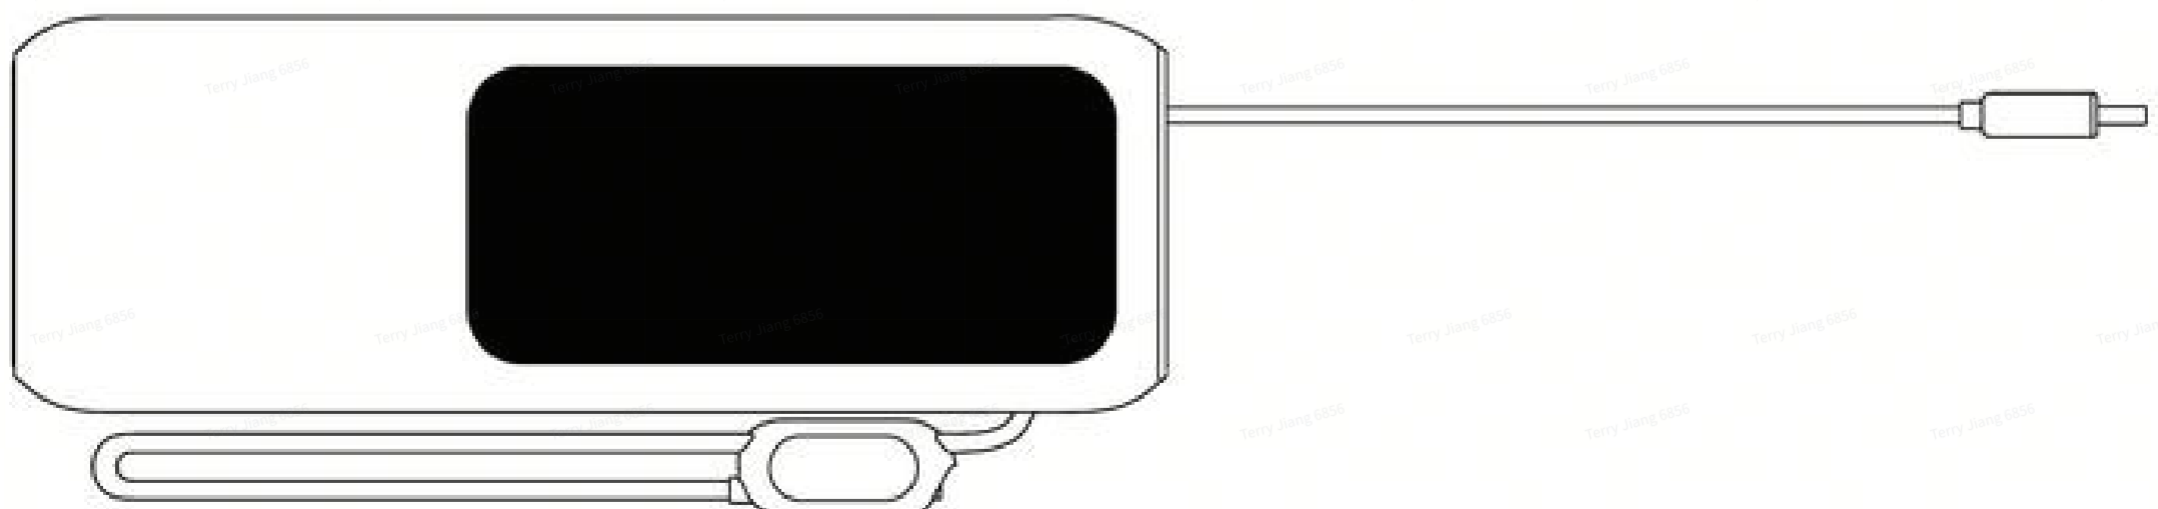

To adjust the cable, pull again, adjust to the desired length, then pull slightly (about 1cm) and stop to set it in place.

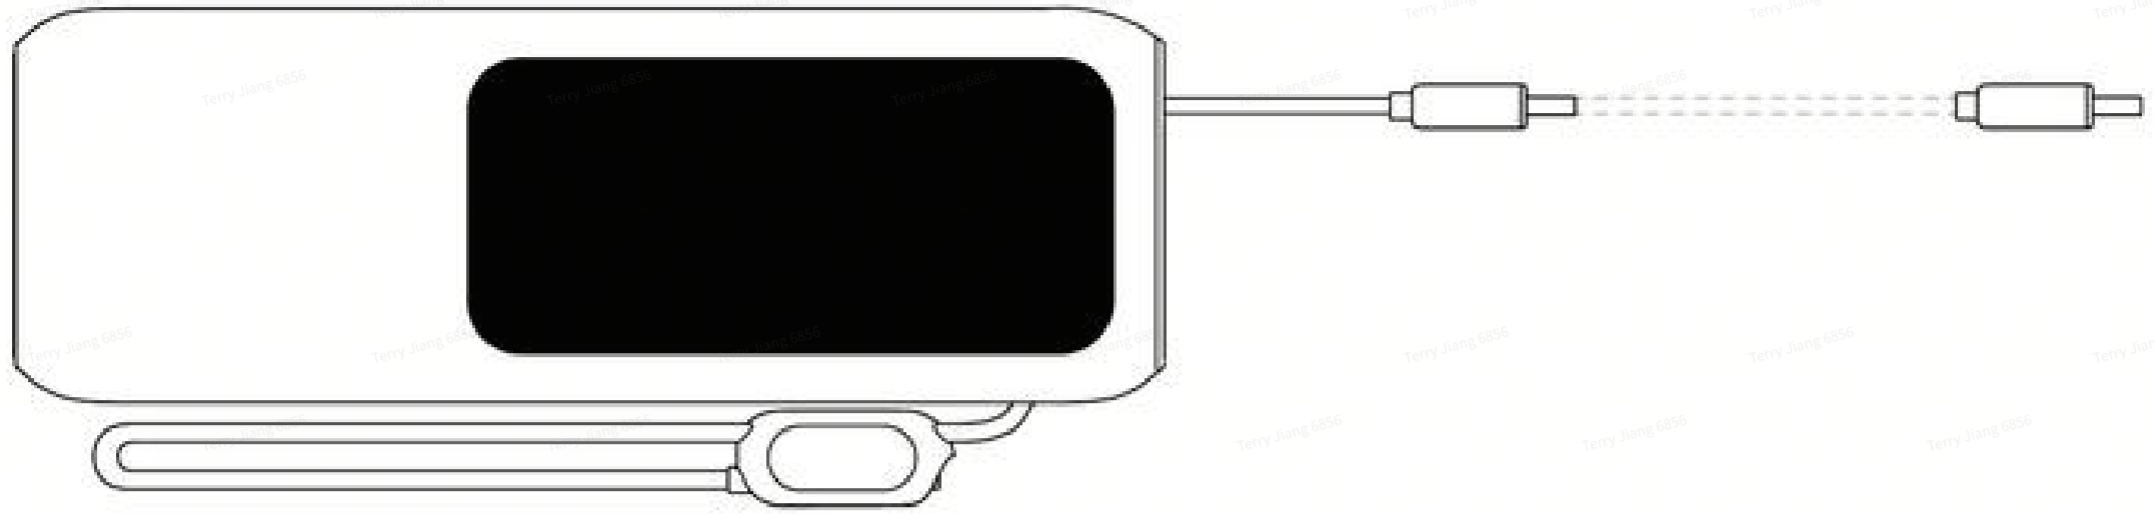



Pull slightly (about 1cm) to retract the cable.

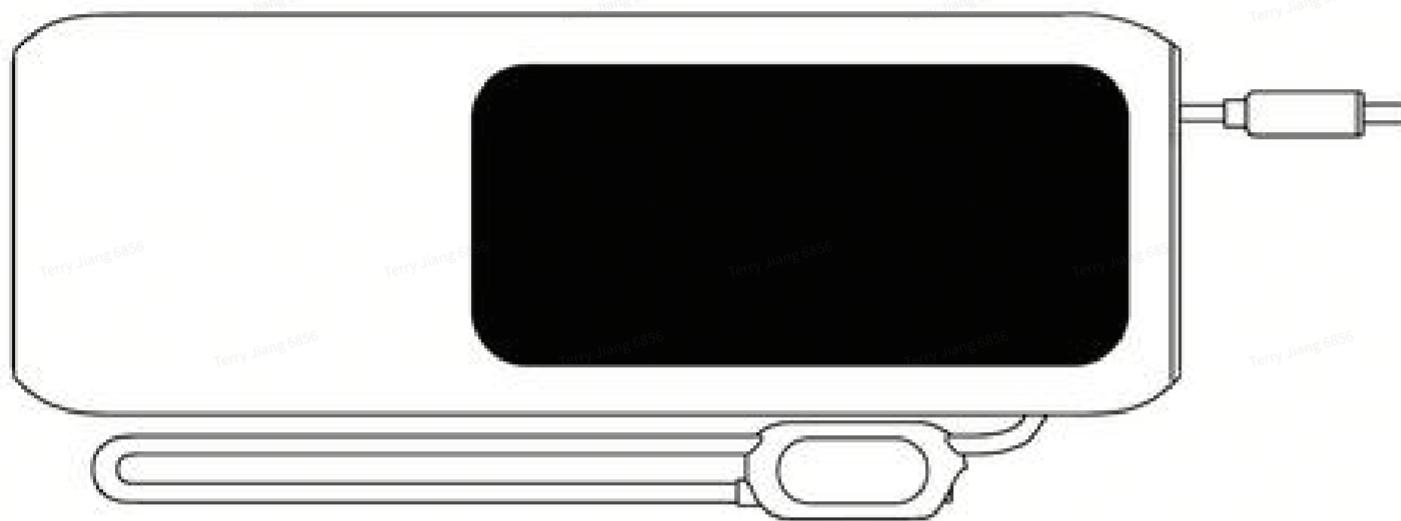

Non-Retractable Built-In USB-C Cable (USB-C2)

Push upward to extend the cable.

Pull downward to secure the cable in place.

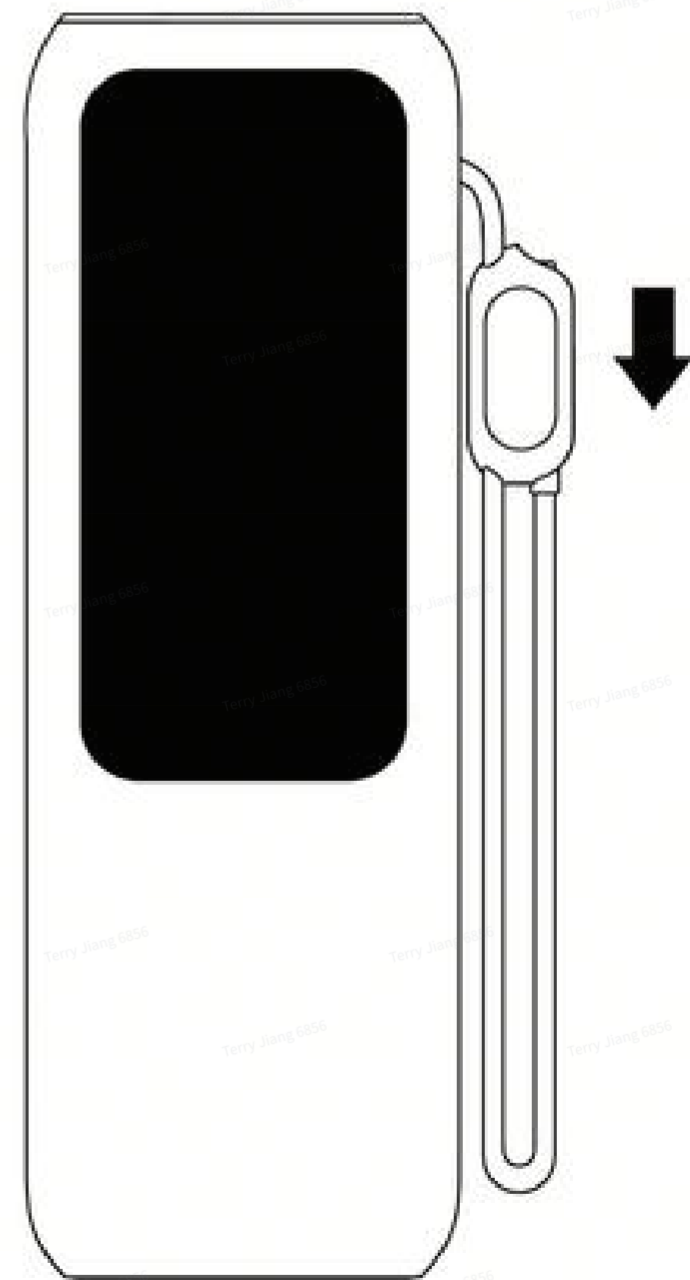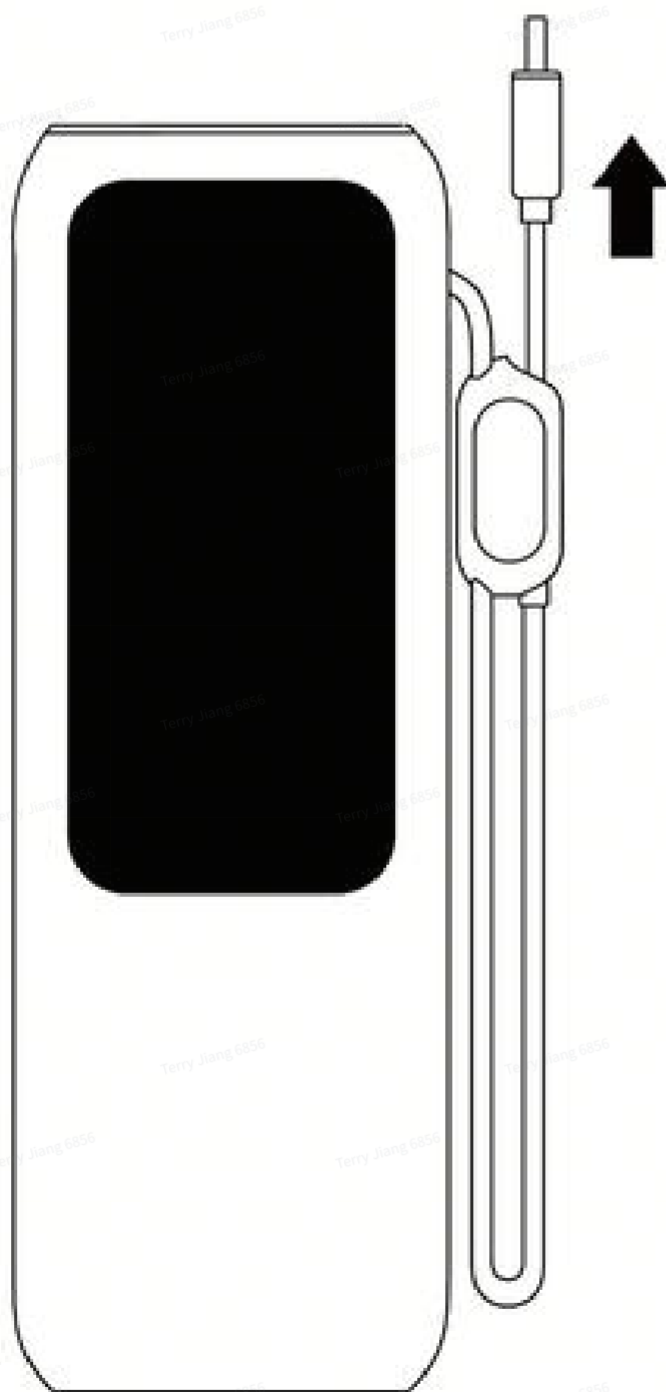

Cable Care Guide

The non-retractable built-in USB-C cable (USB-C2) doubles as a convenient carrying handle for easy grab-and-go.

***Tips for Long-Lasting Use:**

- When using as a carrying handle, hold it gently — avoid swinging or jerking motions that put sudden force on the cable.
- Avoid hanging heavy items from the cable or attaching it to bags where it may bear weight for extended periods.
- When not in use, secure the cable back into its slot to protect the connector.


The cable is designed for everyday carrying and charging. With proper care, it will stay reliable for the long run.

Screen Display Guide

1. Press the power button or pull the retractable built-in USB-C cable (USB-C1) to turn on the screen and check the battery status.
2. The screen stays on during charging / recharging. To manually turnoff the screen, press and hold the power button for 2 seconds.
3. Press the power button twice to activate or exit trickle charging mode.


Checking the Battery Status Without Charging / Recharging

If there is no interaction within 10 seconds, the screen will automatically turnoff.

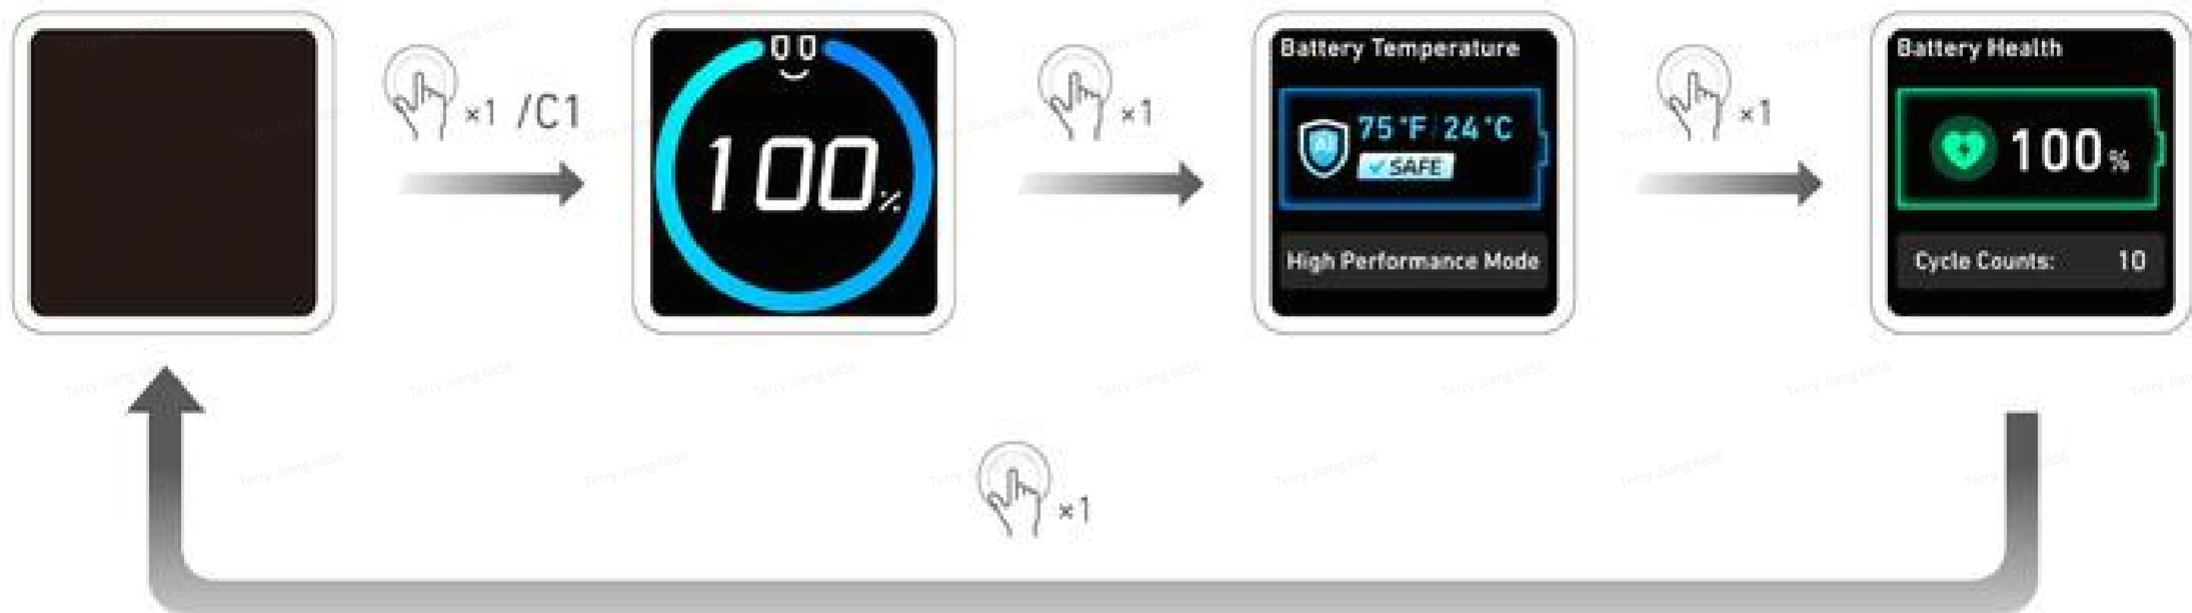


Checking the Battery Status During Charging / Recharging

If there is no interaction within 10 seconds, the display will automatically switch to the main screen.

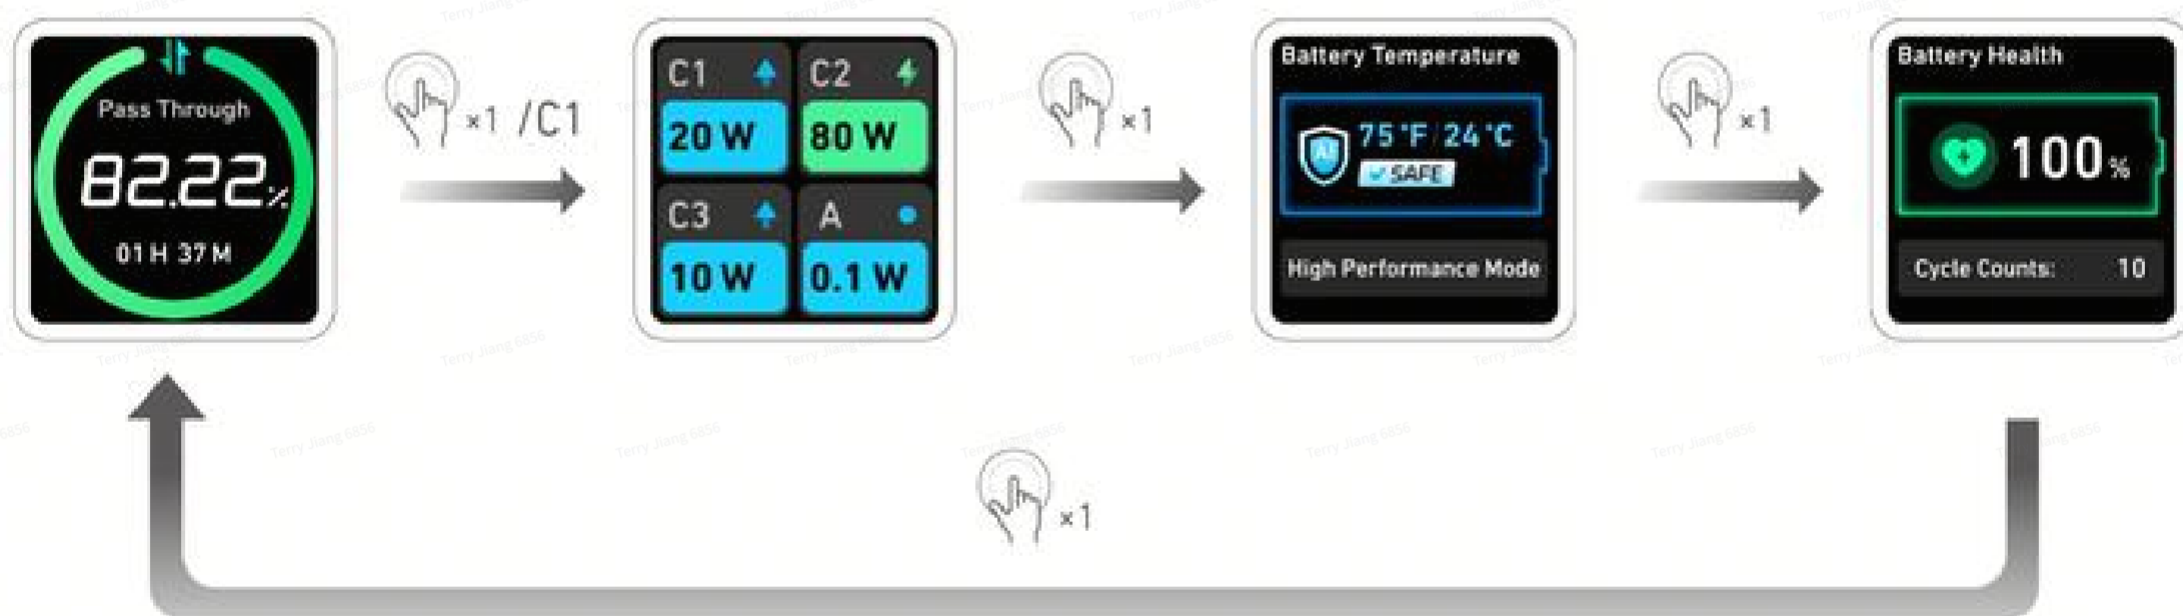

Main Screen Features

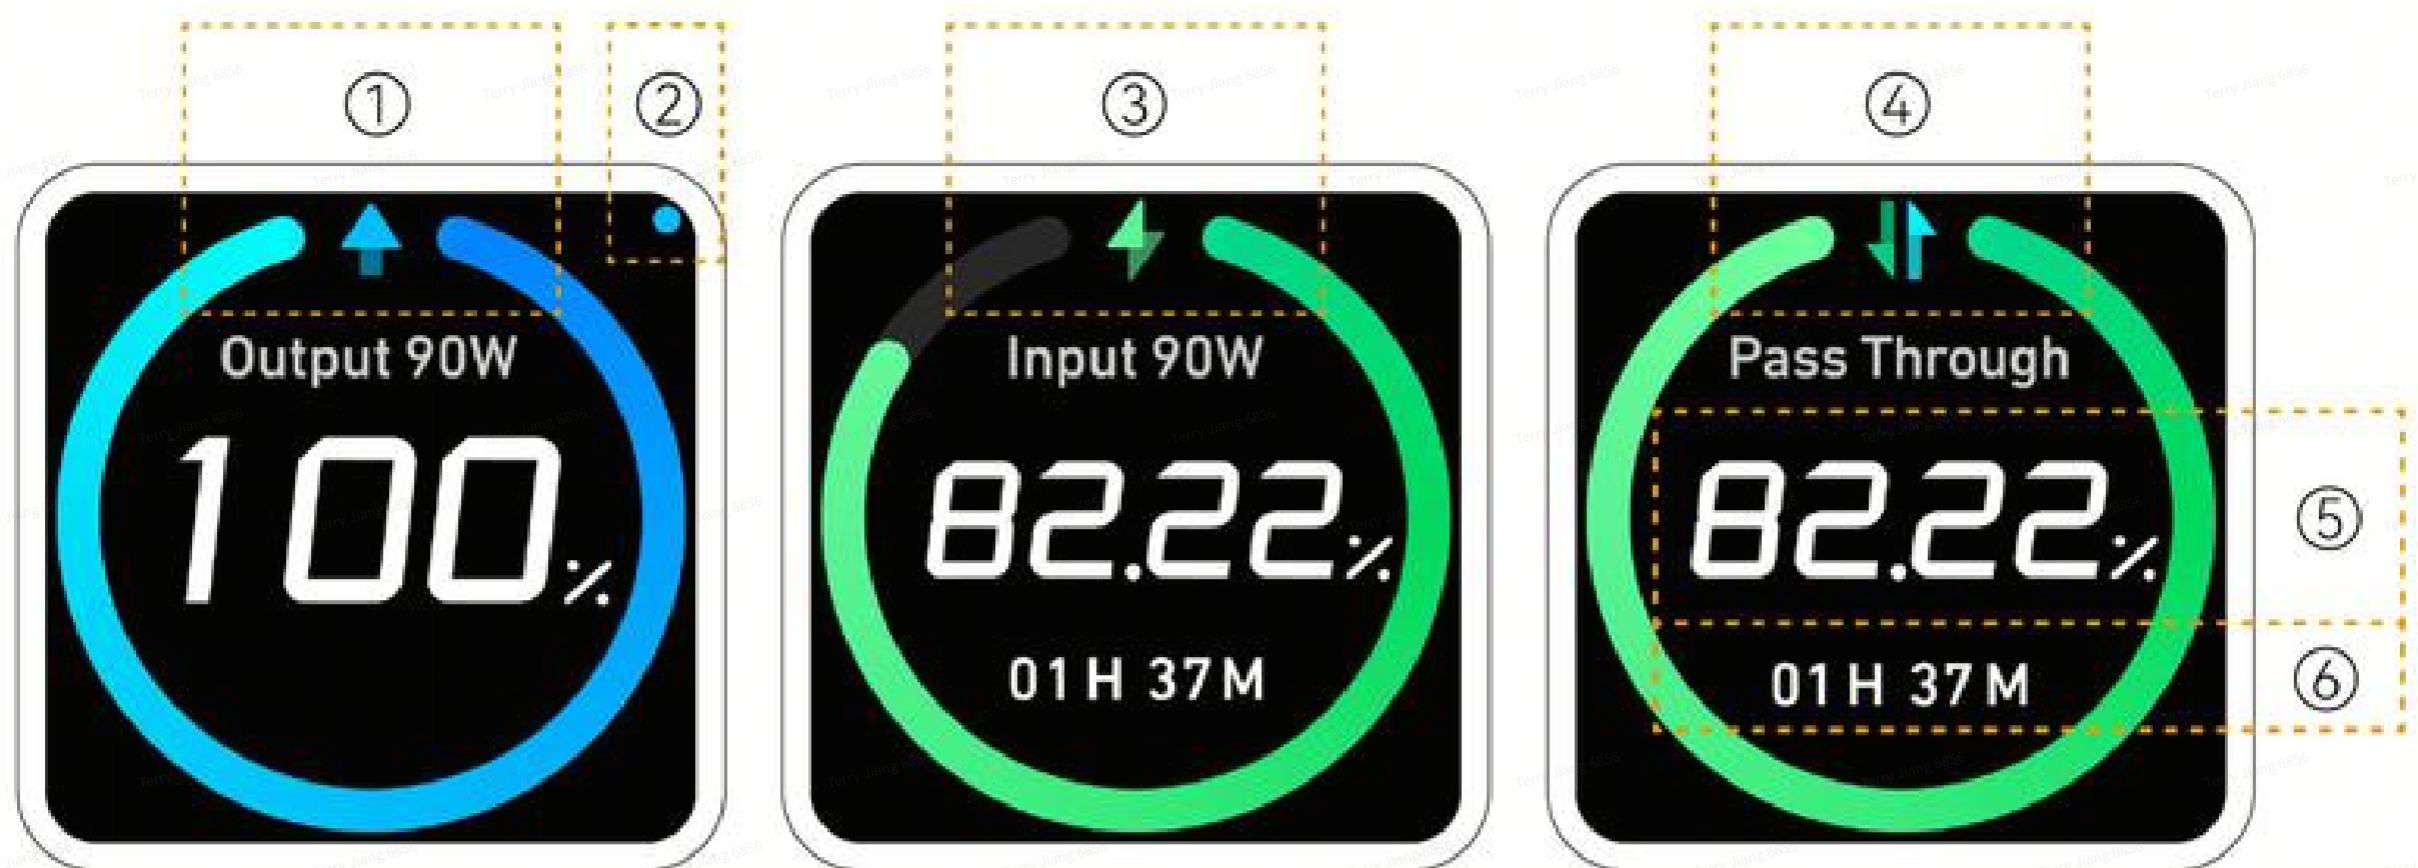

- ① Charging / Output
- ② Trickle Charging Mode
- ③ Recharging / Input
- ④ Simultaneous Charging and Recharging / Pass-Through Charging
- ⑤ Remaining Battery Percentage
- ⑥ Full Recharge Time

Battery Status Under Normal Conditions




Active Cooling Mode: Displayed when the battery temperature is slightly high, reducing the power of charging or recharging to cool the power bank.



***Note:** Other screen displays are listed at the end of this user guide.

Charging Your Devices


Charge your phones, tablets or laptops via the built-in USB-C cables (USB-C1 and USB-C2), the USB-C port (USB-C3), and the USB-A port.

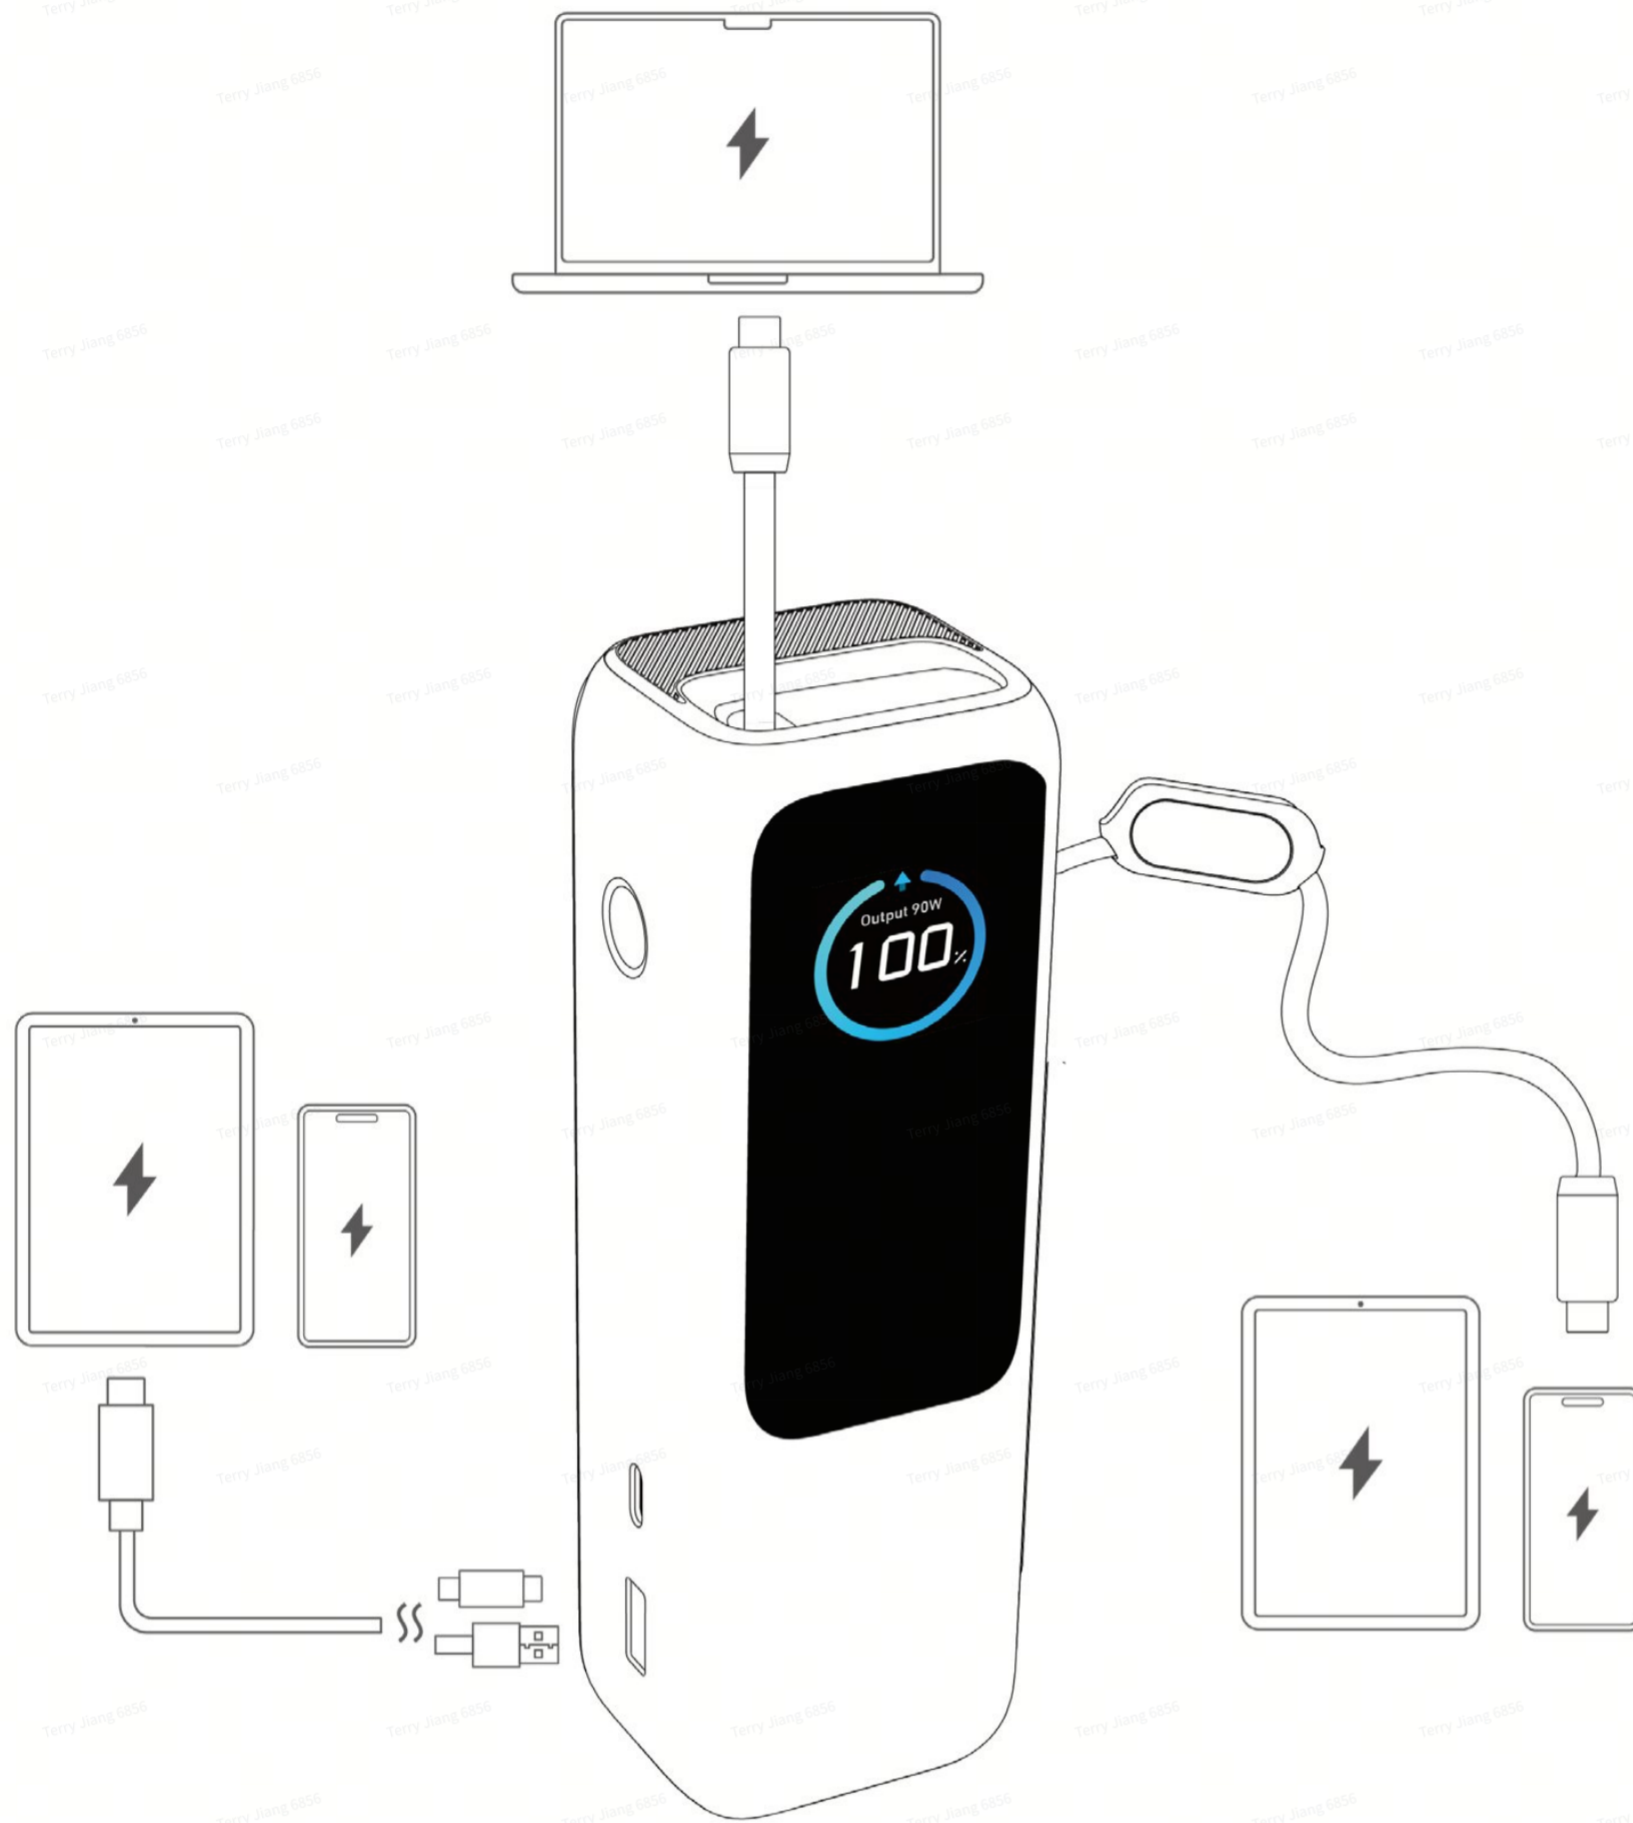

Recharging the Power Bank


Recharge the power bank via one of the built-in USB-C cables (USB-C1 or USB-C2) or the USB-C port (USB-C3).

***Note:** The power bank cannot be recharged via USB-C1, USB-C2, and USB-C3 simultaneously. When connected to multiple power sources, the power bank will automatically select the one with the highest power for recharging.

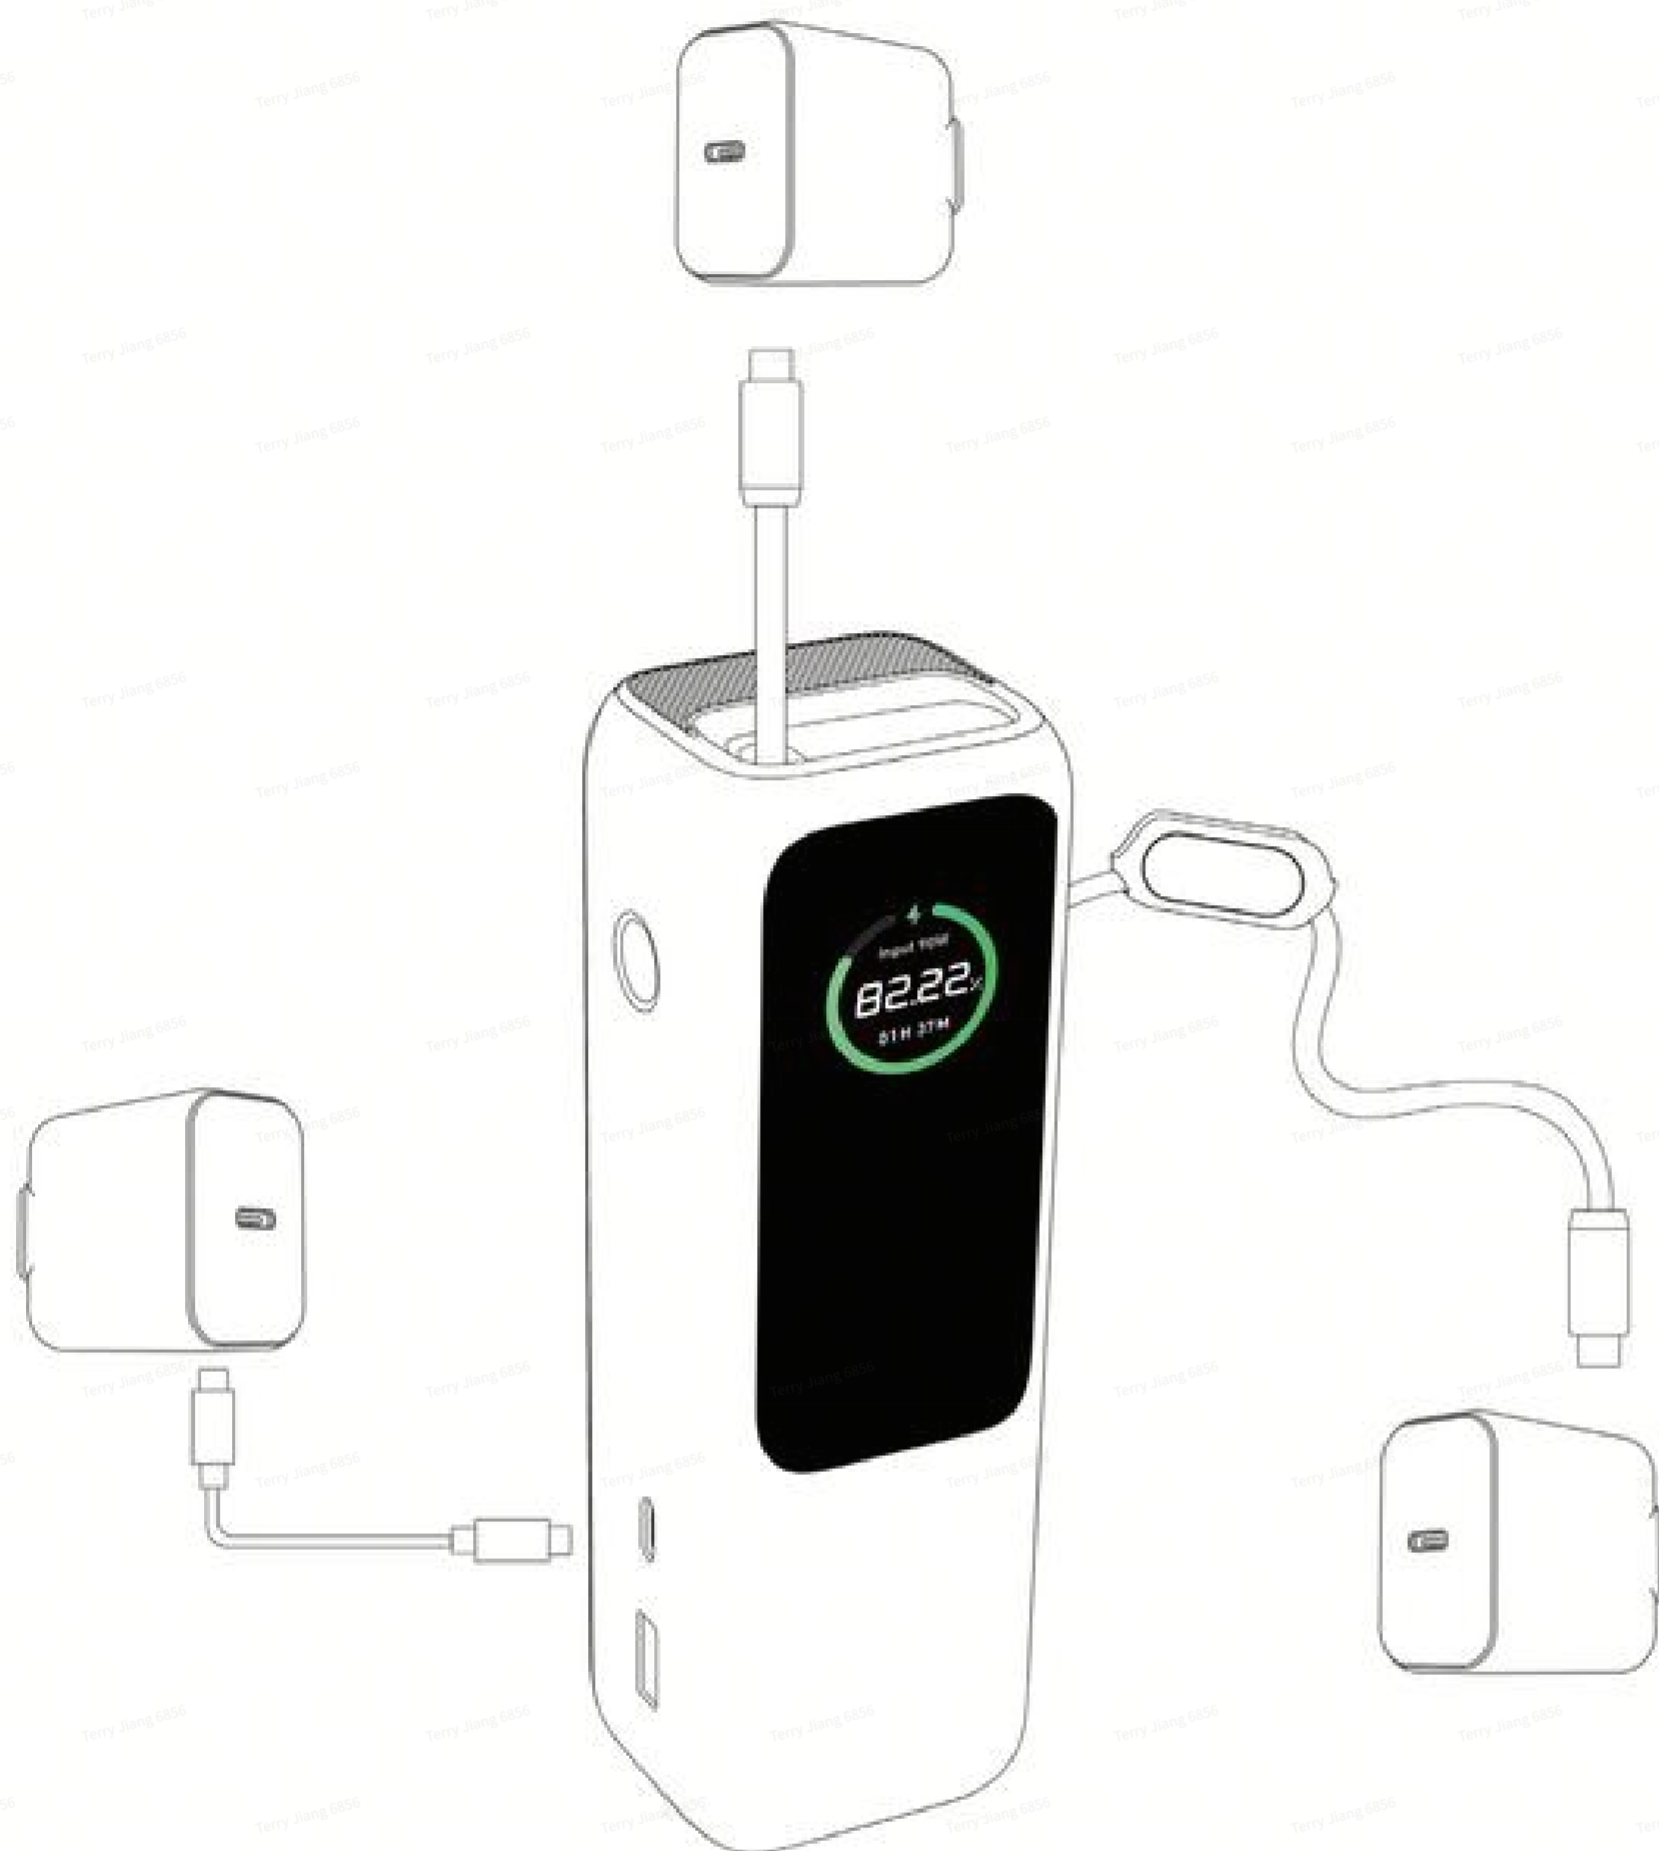


Trickle Charging Mode


Press the power button twice to activate trickle charging mode.

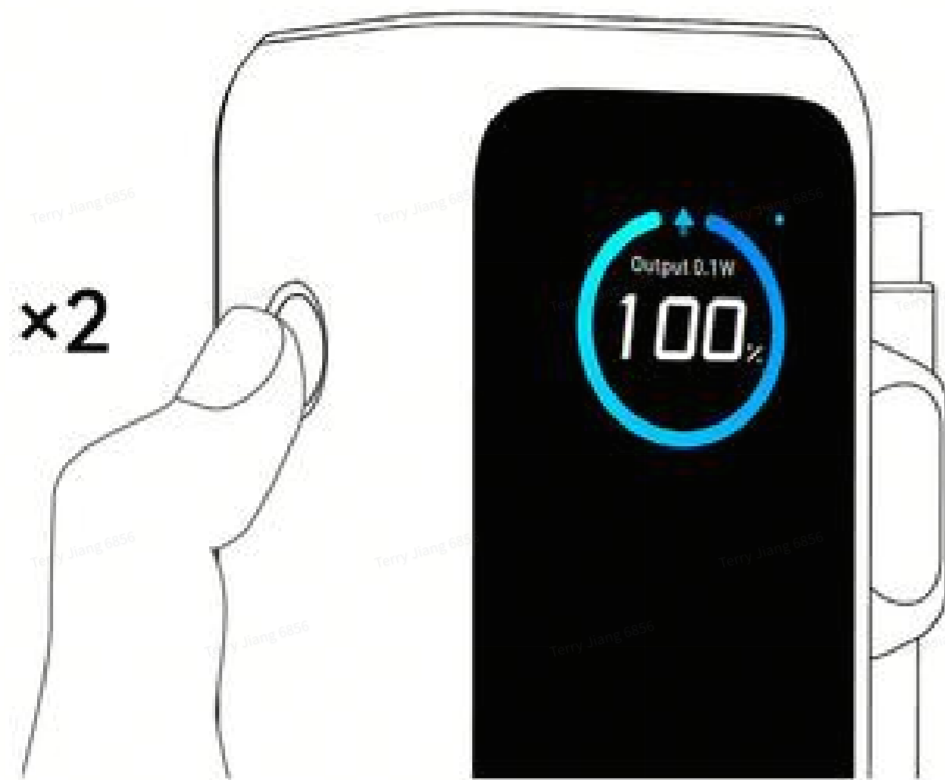

Charge your earbuds or other low-power devices via the USB-A port.

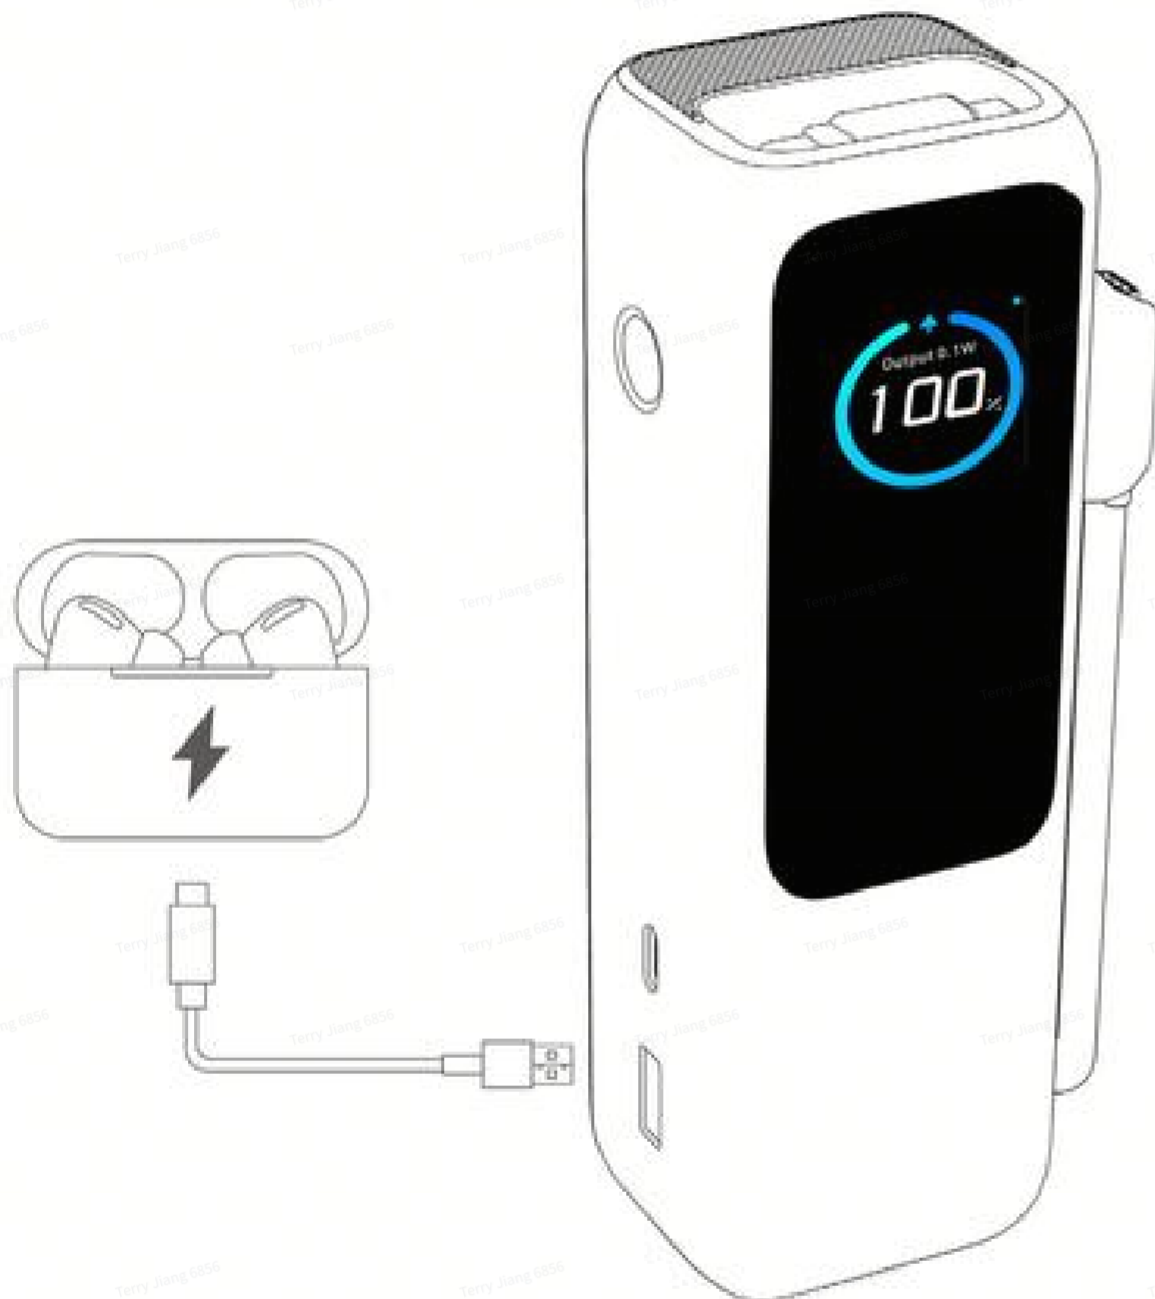

Press the power button twice to exit trickle charging mode.

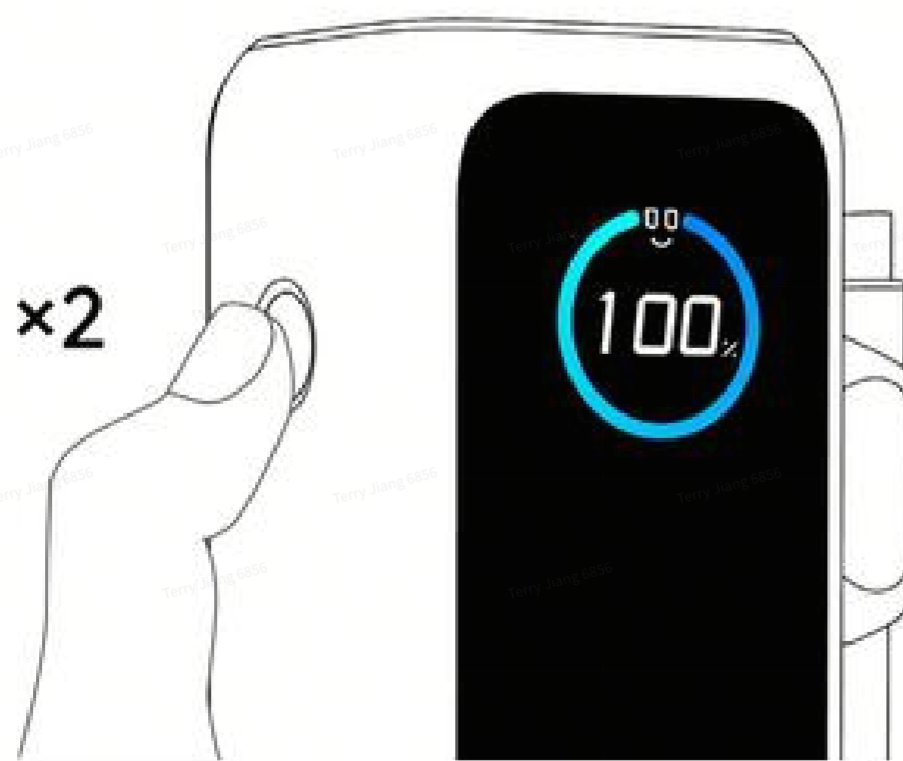


Other Screen Displays

Low Battery Alert: Displayed when the screen is manually turned off during charging / recharging, and the power level is lower than 10%.



Circuit Protection: Displayed when current or voltage abnormality triggers circuit protection.

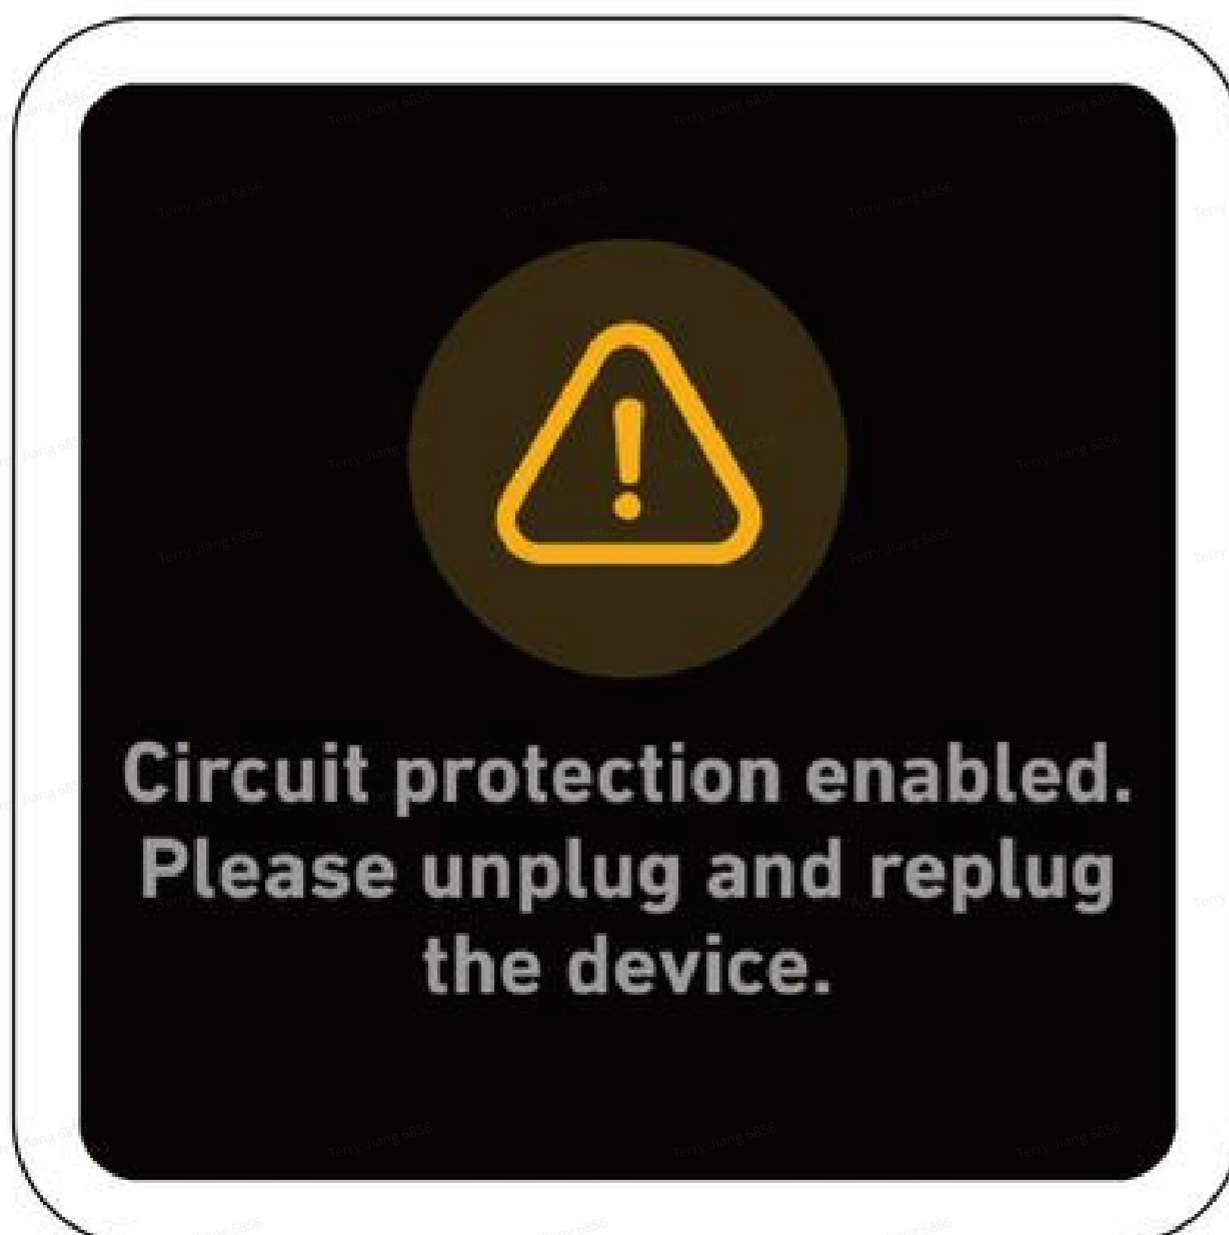

Temperature Protection Mode: Activates when the battery temperature is too high or too low, stopping the power bank until the temperature returns to normal.



Low Battery Health: Displayed when the battery life drops below 60%.



Specifications

Total Capacity	25,000mAh
Battery Capacity	5,000mAh, 18VDC / 90Wh (Five Cells in Series)
USB-C Cable / Port Input	5-11V = 3A / 5V = 3A / 9V = 3A / 10V = 2.25A / 12V = 3A / 15V = 3A / 20V = 5A (100W Max)
USB-C Cable / Port Output	5-11V = 3A / 5V = 3A / 9V = 3A / 10V = 2.25A / 12V = 3A / 15V = 3A / 20V = 5A (100W Max)
USB-A Output	5-11V = 3A / 5V = 3A / 9V = 2A / 10V = 2.25A / 12V = 1.5A (33W Max)
Total Output	165W Max