



OWNER'S MANUAL

LG Digital Signage

(MONITOR SIGNAGE)

Please read this manual carefully before operating your set and retain it for future reference.

98UM5J-B
110UM5J-B

www.lg.com

Copyright © 2022 LG Electronics Inc. All Rights Reserved.

TABLE OF CONTENTS

BASIC3

- Checking the Accessories3
- Learning the Buttons.....4

GETTING READY5

- Kensington Lock Device5

CHECKING BEFORE

INSTALLATION6

- Installation Orientation6
- Installation Location.....7
- Wall Mount Holder8

PRECAUTIONS FOR USE.....9

- Dust.....9
- Afterimage9

PRODUCT SPECIFICATIONS..... 11

LICENCE..... 14


WARNING - This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

BASIC

! Note

- The accessories provided with your product may vary depending on the model or region.
- Product specifications or contents in this manual may be changed without prior notice due to upgrade of product functions.

Checking the Accessories


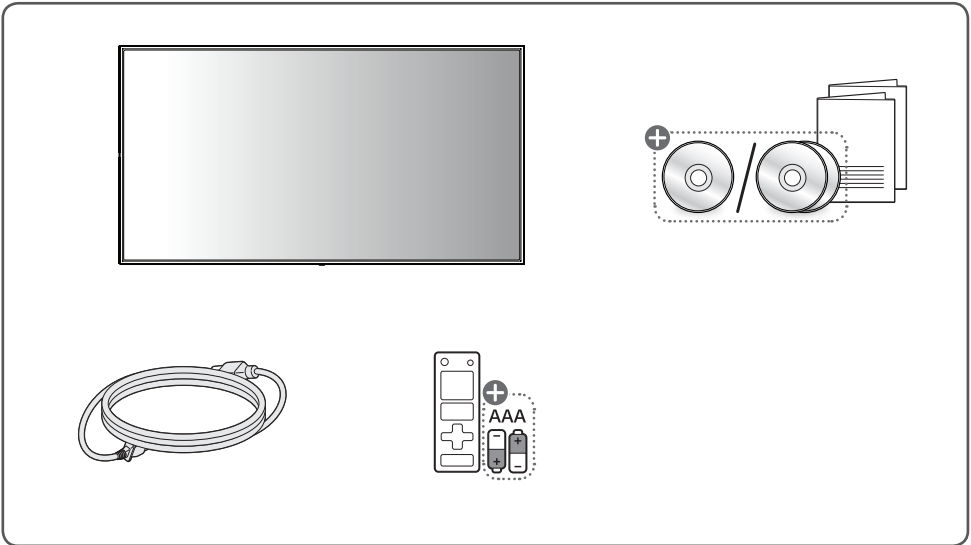


+ Depending on country


Learning the Buttons





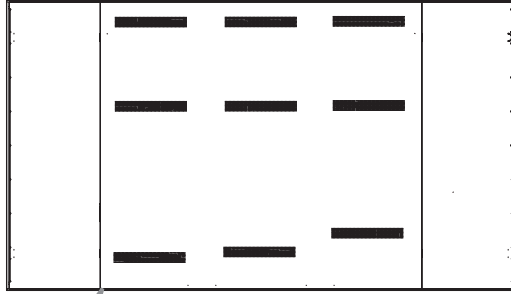


The illustrations may differ depending on the model.

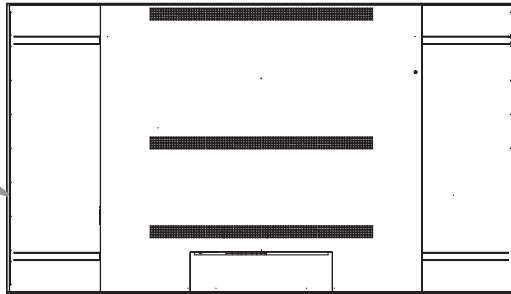98UM5J-B



110UM5J-B



- : Opens the main menu or saves the input selection and exits the menu.
- : HDMI port
-  : Adjusts up and down.
-  : Moves left or right.
- : Turns the power on and off.


GETTING READY

Kensington Lock Device

(This feature applies only to some models.)

The Kensington lock device connector is located on the back of the monitor. For more information on installation and use, refer to the user manual provided with the locking device.

Connect the Kensington security system cable between the monitor and a table.

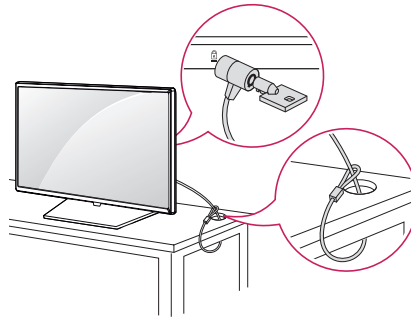

! Note

- The Kensington lock device is an optional specification.
- This is a general illustration of installation and may look different from the product held by the customer.

CHECKING BEFORE INSTALLATION


We are not responsible for product damage caused by failure to follow the guide.

Installation Orientation


Using Vertically

(98UM5J-B Only)



When installing vertically, rotate the monitor 90 degrees clockwise while facing the front of the screen.

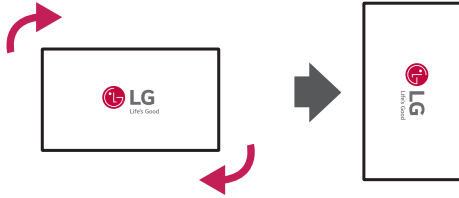

Tilt Angle



Ceiling, Floor Orientation




Installation Location

We are not responsible for product damage caused by failure to follow the guide.

Indoor



Installing on a Wall



A: 40 mm (1.5 inches) or more

- The warranty will not cover any damage caused by using the product in direct sunlight on the front panel.

Installing on a Recessed Wall



A: 40 mm (1.5 inches) or more

B: 50 mm (1.9 inches) or more

C: 100 mm (3.9 inches) or more

- The warranty will not cover any damage caused by using the product in direct sunlight on the front panel.


Outdoor

Outdoor Enclosed




Wall Mount Holder

To install the monitor on a wall, attach a wall mount holder (optional) to the back of the monitor. Take caution, and ensure that the wall mount holder (optional) is securely fixed to the monitor and to the wall. The Wall Bracket dimensions of the wall mount by model are as follows.



98UM5J-B



110UM5J-B

Model	Wall Bracket Dimensions (A x B1) (mm)	Standard Dimensions	Length (Maximum) (mm)	Quantity
98UM5J-B	800 x 400	M8	20	6
	Wall Bracket Dimensions (A x B2) (mm)			
	800 x 800			
Model	Wall Bracket Dimensions (C x D) (mm)	Standard Dimensions	Length (Maximum) (mm)	Quantity
110UM5J-B	1500 x 600	M8	30	4

Model	Wall Bracket Dimensions (A x B1) (inches)	Standard Dimensions	Length (Maximum) (inches)	Quantity
98UM5J-B	31.4 x 15.7	M8	0.7	6
	Wall Bracket Dimensions (A x B2) (inches)			
	31.4 x 31.4			
Model	Wall Bracket Dimensions (C x D) (inches)	Standard Dimensions	Length (Maximum) (inches)	Quantity
110UM5J-B	59.0 x 23.6	M8	1.1	4

Caution

- Disconnect the power cord first, and then move or install the monitor. Otherwise, it may result in electric shock.
- If the monitor is installed on a ceiling or inclined wall, it may fall and result in injury.
- Damage to the monitor by tightening the screws too tightly may void your warranty.
- Use screws and wall mount plates conforming to Wall Mount standards. Breakage or personal injury due to use or misuse of inappropriate components is not covered by the warranty of this product.

Note

- Using screws longer than the indicated depth may damage the inside of the product. Be sure to use the proper length.
- For more information on installation, please refer to the user manual for the wall mount.

PRECAUTIONS FOR USE

Dust


The warranty will not cover any damage caused by using the product in an excessively dusty environment.

Afterimage

- After-image appears when the product is turned off.
 - Pixels may be damaged rapidly if a still image is displayed on the screen for a long period of time. Use the screen-saver function.
 - Switching from a screen with high differences in luminance (black and white or grey) to a darker screen may cause an afterimage. This is normal due to the display characteristics of this product.
- When the LCD screen is in a still pattern for extended periods of use, a slight voltage difference may occur between the electrodes that operate the liquid crystal (LC). The voltage difference between the electrodes increases over time and tends to keep the liquid crystal aligned in one direction. At this time, the previous image remains, which is called an afterimage.
- Afterimages do not occur when continuously changing images are used but take place when a certain screen is fixed for a long time. The following are operational recommendations for reducing the occurrence of afterimages when using a fixed screen. The maximum recommended time for switching the screen is 12 hours. Shorter cycles are better for preventing afterimages.
- Recommended Usage Condition


1 Change the background color and text color at equal intervals.

- Afterimages occur less when the colors to be changed are complementary to one another.

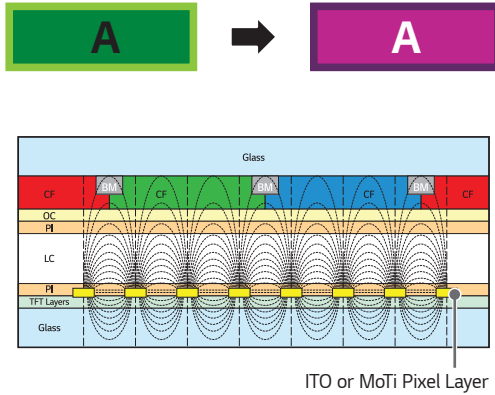

2 Switch the screen at equal time intervals.

- Take caution, and ensure that text or images from before the screen change are not left in the same location after the screen change.

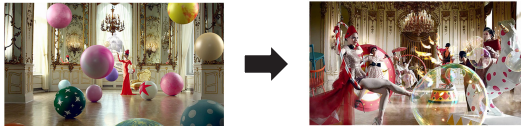

PRODUCT SPECIFICATIONS

Without prior notice, all product information and specifications contained in this manual are subject to change to improve the performance of the product.

98UM5J-B		
Input/Output Ports	NETWORK, HEADPHONE, USB IN, SPDIF, HDMI IN 1, HDMI IN 2, HDMI IN 3	
Resolution	Recommended Resolution	3840 x 2160 @ 60 Hz (HDMI1, HDMI2, HDMI3)
	Max Resolution	
Power Voltage	100-240 V~ 50/60 Hz 6.0 A	
Environmental Conditions	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	10 % to 80 % (Condition for preventing condensation)
	Storage Temperature	-20 °C to 60°C (-4 °F to 140 °F)
	Storage Humidity	5 % to 85 % (Condition for preventing condensation) * Product box packaging storage conditions
Power Consumption	On Mode	560 W (Typ.)
	Sleep Mode / Standby Mode	≤ 0.5 W

110UM5J-B		
Input/Output Ports	NETWORK, HEADPHONE, USB IN, SPDIF, HDMI IN 1, HDMI IN 2, HDMI IN 3	
Resolution	Recommended Resolution	3840 x 2160 @ 60 Hz (HDMI1, HDMI2, HDMI3)
	Max Resolution	
Power Voltage	100-240 V~ 50/60 Hz 6.5 A	
Environmental Conditions	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	10 % to 80 % (Condition for preventing condensation)
	Storage Temperature	-20 °C to 60°C (-4 °F to 140 °F)
	Storage Humidity	5 % to 85 % (Condition for preventing condensation) * Product box packaging storage conditions
Power Consumption	On Mode	580 W (Typ.)
	Sleep Mode / Standby Mode	≤ 0.5 W

Model Name	Size (Width x Height x Thickness) (mm)	Weight (kg)
98UM5J-B	2198 x 1253 x 79.5	78
	Size (Width x Height x Thickness) (inches)	Weight (lbs)
	86.5 x 49.3 x 3.1	171.9
Model Name	Size (Width x Height x Thickness) (mm)	Weight (kg)
110UM5J-B	2474 x 1408 x 99	80
	Size (Width x Height x Thickness) (inches)	Weight (lbs)
	97.4 x 55.4 x 3.8	176.3

HDMI (PC) Support Mode

Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Note
1366 x 768	49.1	60	
1280 x 960	60	60	
1280 x 800	49.5	60	
1280 x 1024	63.9	60	
1920 x 1080	67.5	60	
3840 x 2160	67.5	60	

HDMI (DTV) Support Mode

Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Note
1920 x 1080i	28.125	50	
1920 x 1080i	33.72	59.94	
1920 x 1080i	33.75	60	
1920 x 1080p	33.716	29.976	
1920 x 1080p	33.75	30	
1920 x 1080p	67.432	59.94	
1920 x 1080p	67.5	60	
3840 x 2160p	-	60	

Wireless module (WCT2GM2511) Specifications
Wireless LAN (IEEE 802.11a/b/g/n/ac)

Frequency range (MHz)	Output power (Max.) (dBm)
2400 to 2483.5	17
5150 to 5725	17
5725 to 5850	14

Bluetooth

Frequency range (MHz)	Output power (Max.) (dBm)
2400 to 2483.5	7

- As band channels can vary per country, the user cannot change or adjust the operating frequency. This product is configured for the regional frequency table.
- For consideration of the user; this device should be installed and operated with a minimum distance of 20 cm (7.8 inches) between the device and the body.

LICENCE

Supported licenses may differ by model. For more information of the licenses, visit www.lg.com.



The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LG Electronics Inc. is under license. Other trademarks and trade names are those of their respective owners.



The model and serial number of the product are located on the back and on one side of the product. Record them below in case you ever need service.

MODEL _____
SERIAL NO. _____

Supplier's Declaration of Conformity

Trade Name	LG
Responsible Party	LG Electronics USA, Inc.
Address	111 Sylvan Avenue, North Building, Englewood Cliffs, NJ 07632
E-mail	lg.environmental@lge.com

Temporary noise is normal when powering ON or OFF this device.