


机械键盘使用手册

Mechanical Keyboard User Manual

中文简体 / English

产品信息

中文描述

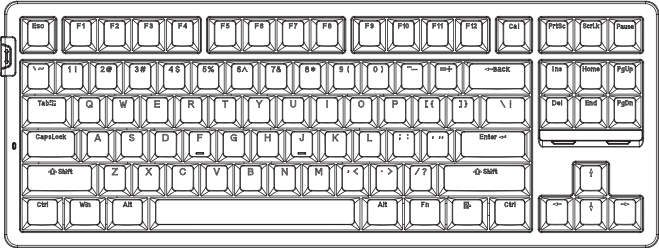

键盘

尺寸	368(L)×138(W)×44(H)±2mm
布局	87%
背光	RGB
轴体	机械轴体
版本	有线/BT/2.4G

※ 本产品不支持快充。


指示灯



Caps Lock



Win Lock
开启亮白灯, 关闭随灯效。



充电指示灯：
两个灯同步。充电时红灯呼吸；充满时绿灯常亮；低电量时红灯闪烁。
不插USB线时，按 Fn+Ins 切换充电指示灯灯效。

有线模式

键盘开关拨到中间档位，插入Type-C数据线，此时有线模式。

BT连接

- ★ 开关拨动到“B”。
 - ★ 长按**Fn+Q / W / E**任意一组对码, 比如长按**Fn+Q**, 此时**Q**键快闪, 表示已进入配对状态, 慢闪表示键盘在回连状态。
 - ★ 打开电脑/手机BT, 搜索并连接设备, 搜索显示的名称:**Keyboard BT**。
- 以此类推: 重复以上步骤, 可储存3组BT设备, 短按**Fn+Q/W/E**, 即可在不同BT设备之间切换。

2.4G连接

- ★ 开关拨动到“G”。
 - ★ 长按**Fn+P**对码, **P**键快闪插入接收器, **P**键停止闪烁即对码成功。
- (使用提示: 出厂时已配对, 无需再次配对)

背光控制

Fn+↑	背光亮度 +
Fn+↓	背光亮度 -
Fn+←	背光速度 -
Fn+→	背光速度 +
Fn+Pause	切换背光颜色
Fn+ScrLK	多种动态背光模式切换

第二组合功能键

Fn+A	切换到Windows系统
Fn+S	切换到Mac系统 (Mac系统Win键和Alt键互换)
Fn+Win	锁定Win键功能和APP键功能
Fn+空格键	长按三秒, 恢复出厂设置

WINDOWS多媒体键

Windows系统(Fn + A: 切换到Windows系统)

Fn+F1	我的电脑
Fn+F2	浏览器
Fn+F3	邮箱
Fn+F4	计算器
Fn+F5	播放器
Fn+F6	停止
Fn+F7	上一曲
Fn+F8	播放/暂停
Fn+F9	下一曲
Fn+F10	静音
Fn+F11	音量-
Fn+F12	音量+

MAC多媒体键

Mac系统(Fn + S: 切换到Mac系统)

Fn+F1	屏幕亮度 -
Fn+F2	屏幕亮度 +
Fn+F5	键盘背光亮度 -
Fn+F6	键盘背光亮度 +
Fn+F7	上一曲
Fn+F8	播放/暂停
Fn+F9	下一曲
Fn+F10	静音
Fn+F11	音量-
Fn+F12	音量+

自定义背光录制

注: Fn+2@~3# 为固定灯效不可自定义。

第1步:按 **Fn+1!** 选择将要自定义的背光。

第2步:按 **Fn+PrtSc** 进入背光录制模式,此时键盘背光熄灭,表示已开始录制背光。

第3步:按下想要录制背光的按键重复此步骤,录制自己想要的背光。

第4步:完成后,按 **Fn+PrtSc** 将保存并退出背光录制模式。


电池电量提示

在BT、2.4G模式下,按Fn+Enter查看电池电量情况:



当背光同时从“1”亮起至“0”时,表示键盘电池 100% 电量。

INTRODUCTION

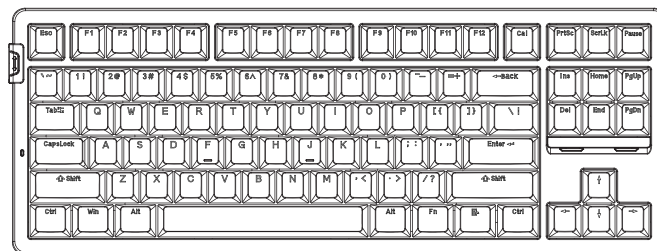


English

Keyboard


Size	368(L)×138(W)×44(H)±2mm
Layout	87%
Backlight	RGB
Switch	Mechanical switches
Version	USB/BT/2.4G

※ This product does not support fast charging.

INDICATOR LIGHTS




Caps Lock



Win Lock

White light when on, follows lighting effects when off.



Charging indicator lights:

Both lights synchronise. During charging, the red light pulses; when fully charged, the green light remains steady; when low on power, the red light flashes.

When the USB cable is not connected, press Fn+Ins to toggle the charging indicator light effect.

WIRED MODE

Switch toggled to center position, Use the USB Type-C cable of this product to connect to the keyboard Type-C port to use the wired mode.

BT CONNECTION

★ Switch toggles to “**B**”.

★ Long press any set of **Fn+Q / W / E** pair codes, For example, Long press **Fn+Q** together and the **Q** key will blink quickly, indicating pairing. If the **Q** key blinks slowly, indicating linking.

★ Turn on your device's BT, search for this keyboard and connect, search for the name displayed: **Keyboard BT**.

Similarly, follow the steps above to store 3 groups of different BT devices, and press **Fn+Q/W/E** shortly to switch between devices.

2.4G CONNECTION

★ Switch toggles to “**G**”.

★ Long press **Fn+P** to pair. The **P** key will flash rapidly when inserting the receiver. Pairing is successful when the **P** key stops flashing.

(Friendly reminder: Paired at the factory, no need to pair again)

BACKLIGHT CONTROL

Fn+ ↑	Backlight Brightness +
Fn+ ↓	Backlight Brightness -
Fn+←	Backlight Speed -
Fn+→	Backlight Speed +
Fn+Pause	Switch backlight color
Fn+ScrLK	Backlight Mode Switching

SECONDARY COMBINATION FUNCTION KEYS

Fn+A	Switch to Windows system
Fn+S	Switch to Mac system(Swap the Win key and Alt key on Mac systems)
Fn+Win	Windows Lock and the APP key function
Fn+Space bar	Press and hold for three seconds to restore factory settings

MULTIMEDIA KEY FOR WINDOWS

Windows system(Fn + A: switch to Windows system)

Fn+F1	Computer
Fn+F2	Browser
Fn+F3	Mailbox
Fn+F4	Calculator
Fn+F5	Player
Fn+F6	Stop
Fn+F7	Last song
Fn+F8	Play/pause
Fn+F9	Next song
Fn+F10	Mute
Fn+F11	Volume-
Fn+F12	Volume+

English

MULTIMEDIA KEY FOR MAC

Mac system(Fn + S: Switch to Mac system)

Fn+F1	Screen Brightness -
Fn+F2	Screen Brightness +
Fn+F5	Keyboard Backlight Brightness -
Fn+F6	Keyboard Backlight Brightness +
Fn+F7	Last song
Fn+F8	Play/pause
Fn+F9	Next Song
Fn+F10	Mute
Fn+F11	Volume-
Fn+F12	Volume+

CUSTOM BACKLIGHT SET

Note: **Fn+2@~3#** Fixed lighting effect, not recording.

Step1: Press **Fn+1!** to customize backlight.

Step2: Press **Fn+PrtSc** Enter the backlight recording mode, when the keyboard backlight is off, Indicates that the backlight starts recording.

Step3: Press the keys which you want to customize, and repeat step3.

Step4: When it is done , pressing **Fn+PrtSc** again will save the settings and exit the backlit recording mode.

BATTERY LEVEL INDICATION

In BT and 2.4G mode, Press and hold **Fn+Enter** to view the battery level indicator:



When the backlighting illuminates from "1" to "0" simultaneously, it indicates that the keyboard battery is at 100% charge.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

This transmitter must not be co - located or operating in conjunction with any other antenna or transmitter.

BATTERIES

A warning that batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the light.

- 1) Replacement of a battery with an incorrect type that can defeat a safeguard;
- 2) Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- 3) Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
- 4) A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.



感谢您选择RK产品,为了快速了解和使用本产品,请仔细阅读本操作指南
如果您有任何其他问题,请点击www.rkgaming.com获取更多帮助

制造商:京恒腾伟(惠州)电子科技有限公司
地址:广东省惠州博罗县园洲镇民营一路8号
Manufacturer: JingHeng TengWei (HuiZhou)Electronic Technology Co., Ltd.
Address: No.8, Minying 1st road, Yuanzhou Town, Boluo County, Huizhou City,
Guangdong Province.

执行标准:GB/T 14081-2010
Executive standard: GB/T 14081-2010