

# Connect 4G

SKU: 470103    MAP: \$549.99

## FEATURES

- Boosts 4G LTE & 3G signals for entire home, office, cottage, or office
- Coverage area up to 5,000 sq. ft.
- For multiple devices and users
- Works on ALL phones with ALL carriers simultaneously
- Enhances talk, text, and high-speed 4G LTE internet

## About

The **Connect 4G** allows users to get better voice and data signal with fewer dropped calls, improved voice quality, faster uploads and downloads. Our 4G signal booster increases cell signals up to 32x and enhances 4G LTE and 3G signals for buildings up to 5,000 sq ft. Compatible with all US and Canadian networks, it works on Verizon, AT&T, Sprint, T-Mobile, US Cellular, Straight Talk and more.

Installation guide available for download and all parts are included in the kit with trained support staff on call to assist. All boosters come with a 2-year warranty.

## Coverage Area

IF YOU HAVE	YOU MAY RECEIVE
●●●●● -89 AND LOWER Stronger 5-Bar Outside Signal	UP TO 5,000 sq. ft. boosted indoor signal
●●●●○ -90 dB Stronger 3 to 4-Bar Outside Signal	UP TO 3,500 sq. ft. boosted indoor signal
●●○○○ -100 dB Stronger 3 to 4-Bar Outside Signal	UP TO 1,000 sq. ft. boosted indoor signal
○○○○○ No existing Outside Signal	A signal booster likely will not work



- LTE FASTEST NETWORK SPEEDS
- UP TO 5,000 sq. ft. COVERAGE
- UP TO +65 dB GAIN
- MULTI-USER WIRELESS BOOSTER

## Kit Includes



Connect 4G



Outside Directional Antenna (314475)



Inside Panel Antenna (311155)



Power Supply (859948)



30' White Low Loss RG6 (75 Ohm) Coax Cable x2 (950630)




Flat Window Cable (951177)

## Specifications

MODEL NUMBER	470103	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 2	1900 MHz
MAX GAIN	65 dB	
IMPEDANCE	75 Ohm	
POWER	110-240 V AC, 50-60 Hz, 8 W	
CONNECTORS	F-Female	
DIMENSIONS	1.25 x 4.25 x 6.5 in	
WEIGHT	0.465 lbs	

## Installation

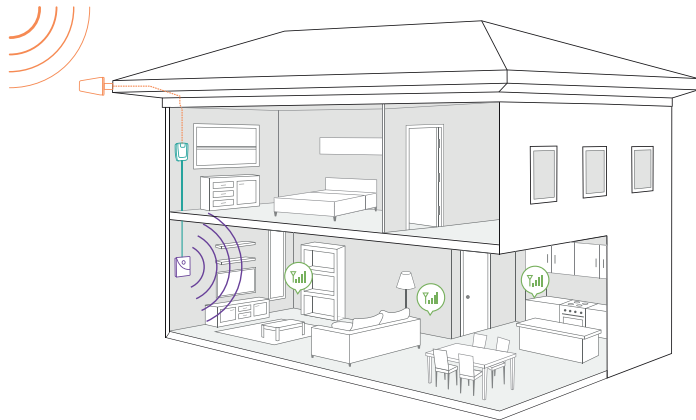

- 1 Receives signal:** The powerful antenna reaches out to access a voice and 3G, 4G, and LTE data signal, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

## Available Accessories

Optional Antenna Kits



4G Interior Wall Mount Panel Antenna (311155)



Lightning Surge Protector 75 Ohm (859992)



-3dB 2-Way Splitter 75 Ohm (859993)



RG-6 F-Male / F-Male, 2ft White Cable (950602)




20 ft. White RG6 Low Loss Coax (950620)




F-Female to F-Female Barrel Connector (971129)

## Package Dimensions


7.25 L x 14 W x 11 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25 L x 20 W x 15 H | 39 lbs.

## Support



2 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660  
Monday to Saturday

FOR PARTNER'S USE

## UPC

CONNECT 4G



8 11815 02452 1