


# MARBERO

## PORTABLE POWER STATION

### Instruction manual

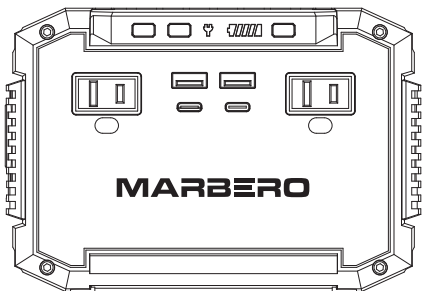

**Model: M138/M138 Max**

## ABOUT THE UNIT

Thank you for applying our multi-function portable power station. In case of power failure or you need to charge on a travel, you can temporarily charge your electrical or digital devices with this unit. This unit can provide USB, DC and AC output and with emergency flashlight. You can keep laptops, appliances, lights and more going for hours longer. Before using this unit, please read the user manual carefully and properly keep it for reference.

## ATTENTION!

This manual is to help you use the product correctly; it does not represent any description on the hardware and software configuration of the product. About the product configuration, please refer to the contract related to this product (if there is), or consult to the seller that sells the product. Pictures in this manual is for reference only, if there are individual pictures do not match the actual, please prevail in actual products.

## The unit provides Modified Sine Wave output

The unit provides Modified Sine Wave output, and can be compatible to AC electric appliance that works with Sinusoidal waveform (power <100W). However, anything that uses an AC motor isn't going to work to full capacity on a modified sine wave. Such as an electrical fan, it will even make the electric appliance arouse some noise. Appliances like refrigerators, microwaves, and compressors that use AC motors and some delicate medical equipment will be better off with a pure sine wave inverter. This product is only used for emergency, it cannot replace the normal alternating current, for long-term use, please adapt the power station specification required by electrical appliances.

## 【 I 】 PRODUCT PARAMETERS


Model No.	M138	M138 Max
Capacity	88.8Wh,8Ah/11.1V(EQ:24Ah/3.7V)	111Wh,10Ah/11.1V(EQ:30Ah/3.7V)
Dimensions(LWH)	155.6x93.8x106.6mm/6.12x3.69x4.19in	
Weight	about 1.03 Kg/2.27lb	
Built-in Battery	High Quality Lithium ion Batteries	
Input Recharging	Adapter: DC15V/2A Solar Panel Charging: 13V~25V/1.7A Max	
Fully Charged Time	DC15V/2A;about 4 hours	DC15V/2A;about 6 hours
USB Output	USB1: 5V/3A,9V/2A 18W ,QuickCharge3.0 USB2: 5V/3A,9V/2A 18W ,QuickCharge3.0 *USB1+USB2: 2 x 5V/2.1A(3.1A, 15W Max) USB C1: 5V/3A,9V/2A 18W PD3.0 USB C2: 5V/3A,9V/3A 30W PD3.0	

AC Output	110V/60Hz±10%	
AC Power	AC Continuous Output: 100W/150W Max	
Bulb Type	2 x Ultra bright LED Flashlight	
Power Indicator	LED Indicators	
Operation temperature	-10 C -40 C / 14 F - 104 F	
Charge temperature	0 C -40 C / 32 F - 104 F	
Lifecycle	>500 times	
Package include	1 x Portable Power Station 1 x Car Charger Adapter	1 x power adapter 1 x User Manual


※ There may be some differences on different spare parts. Please adhere to the actual product instead.

## 【 II 】 PRODUCT DESCRIPTION


### 【Front】

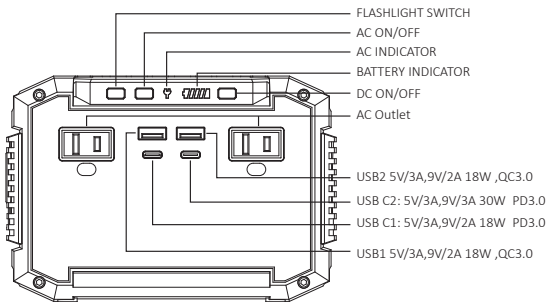

## 【LEFT】



## 【RIGHT】




## 【III】 PRODUCT INSTRUCTION

### 1) How to provide power for AC appliances with this product?

Connect the power cable plug of the electrical appliance to the AC outlet of the product, long press the AC power button to turn on AC output, and the unit will start providing power to your appliance.

### 【Front】

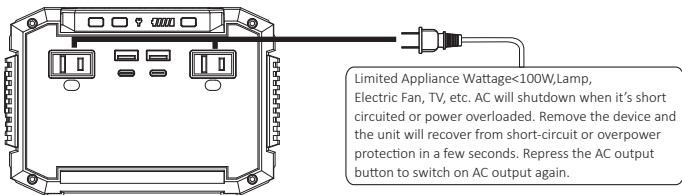

**When the AC port is not in use, turn it off to conserve power.**

**Protection Mode:**

**Short-circuit/Overpower Protection:** If the AC output is short-circuited or overpowered(Load(s) power>150W), the unit will shutdown AC output to protect itself. Please clear the problem and re-press the AC button for AC output.


※ Some devices, such as refrigerator, ice maker or a laser printer may require a surge power to start or work during a very time period, the surge power could exceed 150W or even higher, this could cause overpower protection with this unit. Please remove the devices and consult with the device manufacturers for more information. Please clear the problem and re-press the AC button for AC output.

## 2) How to provide power for USB(C) digital appliances with this product?

Connect the standard USB cable of digital appliance to the USB output of the unit, press the to turn on USB output.

Notice: Some smart devices, such as Bluetooth headphones and LED lights require very small input current to charge, which could be less than 150mA. The unit may fail to charge these kind of smart devices due to detection current limitation by the USB output ports. On this occasion, user can long press the power button for 3-5 seconds to keep the USB port output running. Please turn off the power when the smart devices are fully charged to save power.


**Quick Charge Output:** This product supports Qualcomm Quick Charge 3.0 and USB C PD(Power Delivery)Output for smart devices which also support Qualcomm Quick Charge 3.0 or USB PD Protocol. The actual output voltage and current depend on the actual smart devices, it can be obtained by consulting the smart device manufacturer.

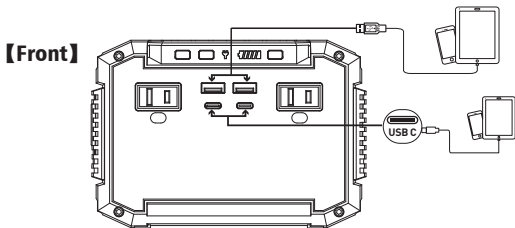

## 3) How to use the flashlight

This unit is built with ultra-bright LED panel. Support 3 levels of brightness and SOS mode. press the button "➡" to switch on flashlight and single press the button to switch to higher brightness/SOS mode, Press the button to switch off.

**Warning! Do not point directly at the eyes of human in case of any damage due to the strong light.**




#### 4) How to charge the unit?

##### a. Charge through AC Wall Charger


Using the included AC Wall Charger, plug the unit into any wall outlet to charge the unit. You will know the unit is charging when the blue LED battery indicators are blinking. The unit is fully charged when all battery indicators stop blinking and remain solid. After the unit is fully charged, please remove the AC wall charger in time.

**【LEFT】**

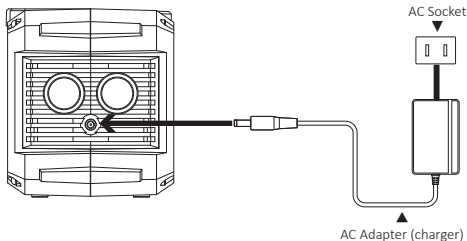

##### b. Charge from solar panel [not included]

1. Make sure Voc (open circuit voltage) of the solar panel does not exceed 22V.
2. Place your solar panel where it will get as much direct sunlight as possible.
3. Plug the output of the solar panel into the input of the unit to start charging. You will know the unit is charging when the blue LED Battery Indicator lights up and blinks. The unit is fully charged when all battery indicators stop blinking and remain solid.

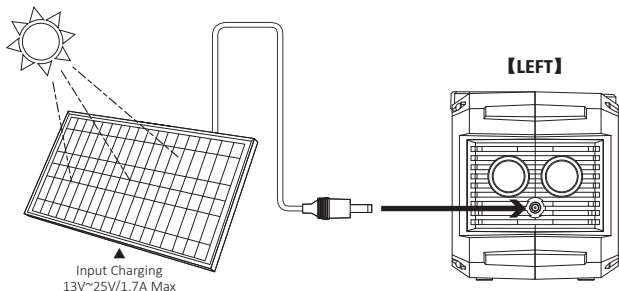

### **c. Charge from your car with a 12V cigarette lighter.**

Using the included car charger, plug the unit into a 12V cigarette lighter (car port) of your car. You will know the unit is charging when the blue LED Battery Indicator lights up and blinks. The unit is fully charged when all battery indicators stop blinking and remain solid.

**Attention: 1. Charging from a 12V carport is for emergency charge only, it cannot fully charge the unit. 2. To avoid car battery power loss. Charging this unit through your car cigarette lighter is only available when your car engine is started. 3. This unit can be charged by 12v gasoline car carport. It cannot be charged from a 24v car port.**

## **【 IV 】 SECURITY AND MAINTENANCE**

- a) Do not short-circuit the unit. To avoid short-circuiting, keep the unit away from all metal objects (e.g. coins, hair-pins, keys, etc.).
  - b) Do not heat the unit, or dispose of it in fire, water or other liquids. Keep away from high temperatures. Do not expose the unit to direct sunlight.
  - c) Keep away from high humidity, dusty places.
  - d) Do not disassemble or reassemble this unit.
  - e) Do not drop, place heavy objects on, or allow strong impact to this unit.
  - f) This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
  - g) Children should be supervised to ensure that they do not play with the appliance.
  - h) Do not cover the device with towels, clothing and other item.
  - i) The unit may become hot when charging. This is normal. Use caution when handling.
  - j) Do not charge the unit over the required time.
  - k) Disconnect the unit when fully charged.
  - l) Use the unit properly to avoid electronic shock.
- m) Please deal with scrap products in accordance with the regulations, do not treat the built-in battery as a household garbage, so as not to cause the explosion and pollution.
- n) The product is only used for emergency situations, it cannot replace the standard DC or AC power of household appliances or digital products.

## 【 V 】 PRODUCT APPLICATION SKILLS

- a) This product is built in high quality original lithium ion battery, it has no memory effect but high-capacity, and it is durable. However, we still recommend you to apply in the range of 10 °C ~30 °C, so as to obtain the optimal charging capacity.
- b) When charging, in order to avoid interference, please stay away from TV, radio and other equipment.
- c) If the device has not been used for a long time, please disconnect the cable and store.
- d) Some portable devices may need to be set in charge mode to charge, see the corresponding equipment use manual for more information.
- e) In order to extend the life of product (lithium battery), it is best to charge within 3 months, and charge at least once within 6 months.
- f) If this unit is switched on, and while the light panel, AC and USB are not in use, it will automatically shut down in 15 seconds.

## Cold Weather Usage

Cold temperatures (below freezing) can affect the unit's battery capacity due to chemical characteristics of the battery. If you'll be living off-grid in sub-zero conditions, we recommend you keep your unit in an insulated cooler, and connected to a power source (solar panels). The natural heat generated by the unit contained in an insulated cooler will keep battery capacity at its highest.

## Recycle

Always return your used electronic products, batteries, and packaging materials to dedicated collection points. This way you help prevent uncontrolled waste disposal and promote the recycling of materials.

## Battery information

Your device has an internal, non-removable, rechargeable battery. Do not attempt to remove the battery, as you may damage the device.

The battery can be charged and discharged over 500 times, but it will eventually wear out.

## Statement

All rights reserved. Reproduction in whole or in part without written permission is prohibited. All other trademarks are trademarks of their respective owners. Features and specifications are subject to change without notice.

Contact Us:  
service@marbero.com



MADE IN CHINA