



Features:

- 2.4G technology
- Receiver response time is 3ms, ensuring a fast response and better control.
- Smooth and highly sensitive to control inputs and stable at distances from 400-500m.
- With brake and fail safe, out of control protection function.
- Voltage range of the transmitter: 4.8V-12V(support 1s-3s), automatic identification of voltage, low voltage warning: 7.4V/4.8V
- Voltage range of the receiver: 3.3V-10V, working current 30mA, supports high voltage servos.


Channel function

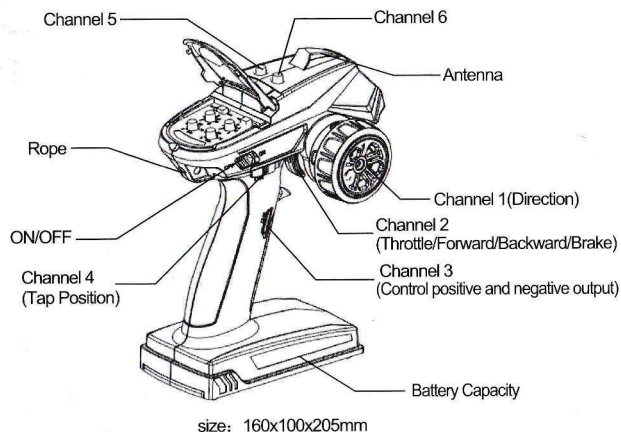

CH1:
Reverse for steering

CH1:
Sub-trim for steering

CH1:
EPA for steering



CH2:
Reverse for throttle


CH2:
Sub-trim for throttle

CH2:
EPA for throttle

Basic operation

Battery installation:

1. Open the battery compartment cover.
2. Insert 4 AA fully charged batteries or 2S Li-Po batteries with correct polarity. (No response if battery polarity reversed).
3. Replace battery compartment cover.




The battery socket is equipped with anti-reverse insertion function, wrong polarity connection will not burn the transmitter.

Failure protection:

Push the throttle trigger forward to the maximum and keep it still. Click the failure control button on the side of the receiver. the blue light flashes quickly Press the failure control button again after two seconds and the blue light is always on and the setting is successful.

Binding process:

1. Press receiver button, LED indicator fast flashing means entering into binding mode, the receiver will automatically looking for the nearest transmitter signal,
2. The indicator will always ON after successful bound.



ROFUN RACING

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.