



Operating Instructions For SU-90 Auto-Fill for Hot Food Tables




**CHECK FOR CONCEALED DAMAGE
FILE CLAIM WITH DELIVERING FREIGHT CARRIER**

START UP PROCEDURE

STEP 1:

Close the Quarter Turn Valve on the Drain Outlet located on the underside of the unit (**Figure 1**).

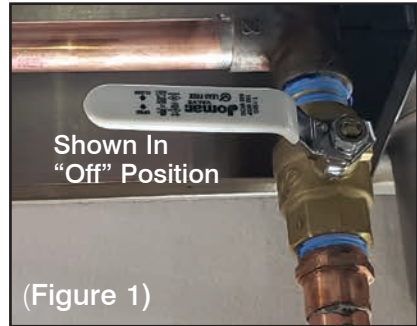

STEP 2:

Activate the Auto Fill by turning switch to on position located on the front panel of the unit. (**Figure 2**)





STEP 3:

Once water reaches the sensor level & stops (**Figure 3**), turn on the heating elements (**Figure 4**).

Water will auto fill as the demand requires.

NOTE: Water sensor will be only in one basin but will control water levels in all wells.


If water does not begin to fill, check to be sure drain valve is closed and water supply is turned on.

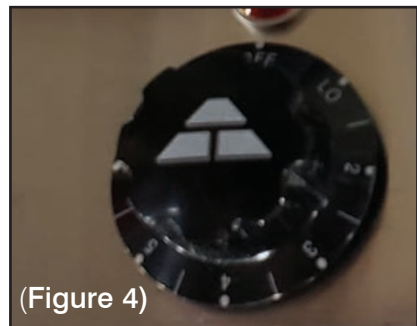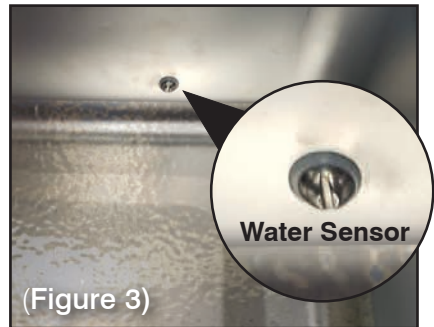

SHUT DOWN PROCEDURE

STEP 1:

Turn off heating elements
(Figure 1).

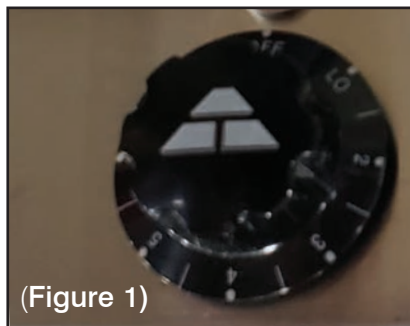

STEP 2:


Turn off Auto Fill.
(Figure 2).



STEP 3:



Open the Quarter Turn Valve on the Drain Outlet located on the underside of the unit to drain the water (Figure 3).

NOTE: be certain Auto Fill power is off before opening drain line. Water will run continuously directly down the drain if this step is skipped.

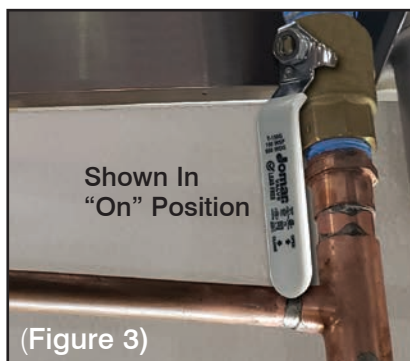

SEE CONNECTION DETAILS ON BACK PAGE

WATER INLET CONNECTION

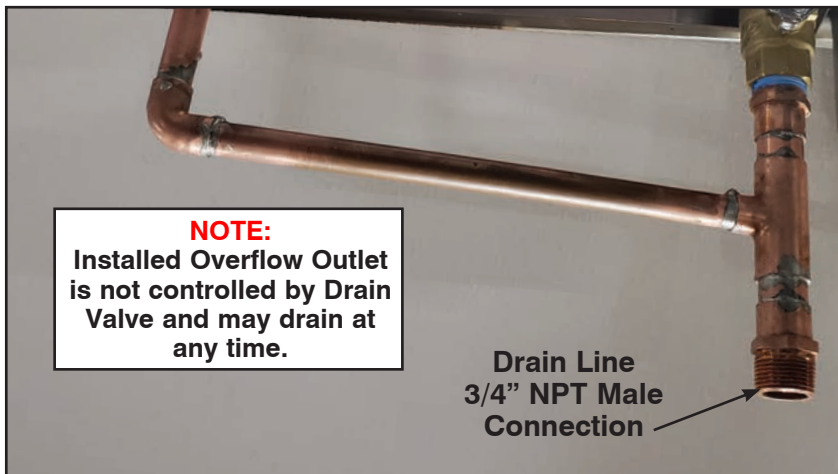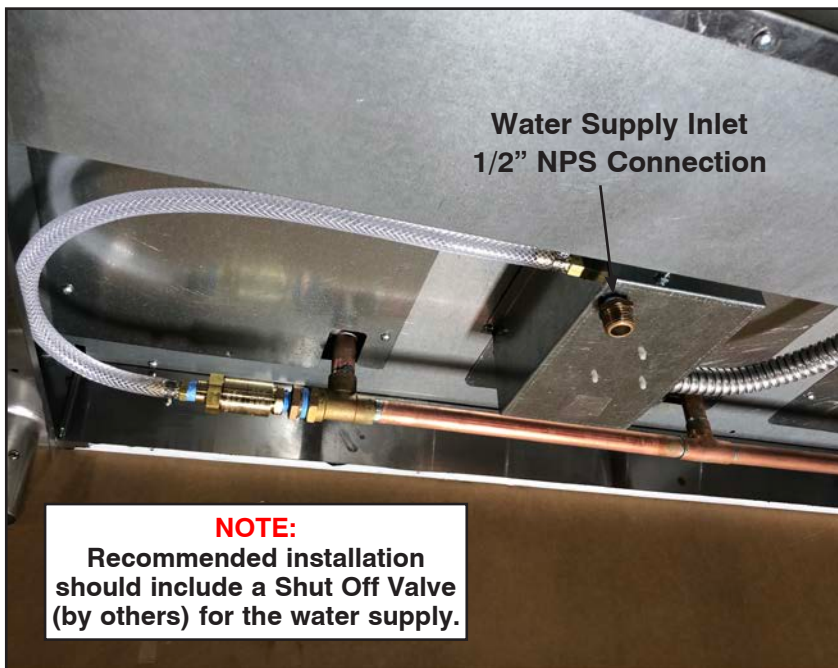

Hauppauge, New York 11788

For Further Assistance
Contact Customer Service at:

800-645-3166

or

customer@advancetabco.com

©ADVANCE TABCO JUNE 2022