

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

CF38815


**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirements.

## Installation Steps

### For Semi-Flush

1. Attach two screws to the mounting strap, and secure with two lock nuts. **(You can adjust the length of the screws if necessary.)**
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Cut the redundant wires if necessary, and make wire connections with wire nuts:
  - Connect the smooth wire **(marked)** from fixture to the black wire from power source.
  - Connect the ridged wire **(unmarked)** from fixture to the white wire from power source.
  - Attach the grounding wire to the mounting strap with a green grounding screw. Then connect it to the house grounding wire with the wire nut.
 Carefully tuck wires back into the ceiling box.
4. Unscrew two bolt nuts from the canopy, attach the canopy to the mounting strap by inserting the screws, and then secure with the bolt nuts.
5. Attach the nipple to the coupling of the socket base, and secure with a hex nut. **(You can adjust the length of the nipple.)**
6. Attach the tube, cap-1 and cap-2 onto the coupling by inserting the nipple, and then secure with a hex nut.
7. Install bulbs. **(Please do not exceed the maximum capacity that is recommended on the package.)**
8. Attach the glass shade to the fixture, and secure with the rubber pad, metal pad and hex nut. Then attach the decoration ring upwards to the glass shade carefully, and then secure with the finial.
9. Turn on the power at fuse or circuit box.

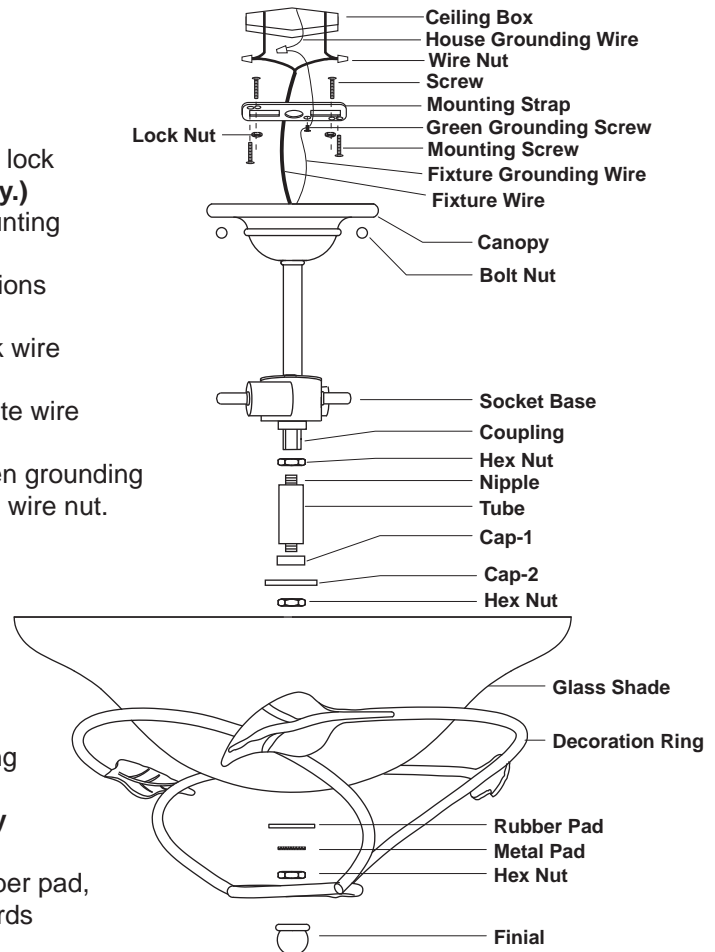

### For Pendant: (See Fig.1)

1. Attach the nipple-1 to the mounting strap, and secure with a washer and hex nut.
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Thread the fixture wire and grounding wire through the loop, and secure the loop onto the nipple-2.
4. Choose a certain length of the chain that you need, and weave the fixture wire and the grounding wire through the chain links. Connect one end of the chain with the loop by using the loop lock.
5. Secure the top loop to the nipple-1.
6. Thread the fixture wire and grounding wire through the collar, canopy-2, top loop, nipple-1 and mounting strap in order.
7. Connect the other end of the chain with the top loop by using the loop lock.
8. Follow step 3 as for Semi-Flush.
9. Attach the canopy-2 to the mounting strap by inserting the top loop, and then secure with the collar.
10. Follow steps 5 ~ 9 as for Semi-Flush.

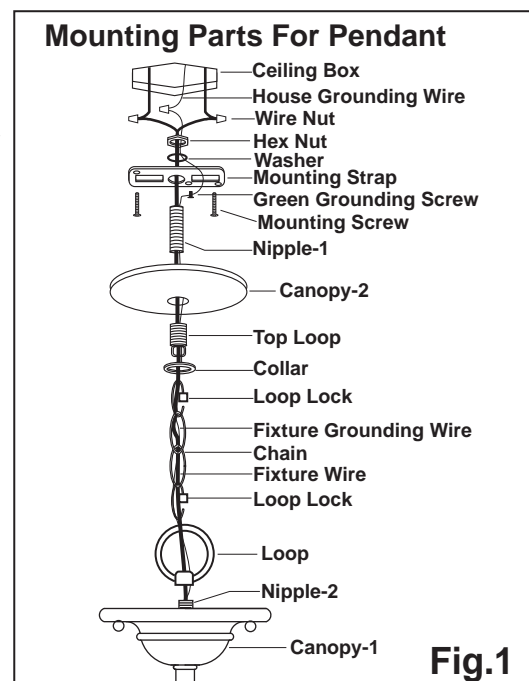


Fig.1