




Dog Training Collar User Manual

I .Package Includes

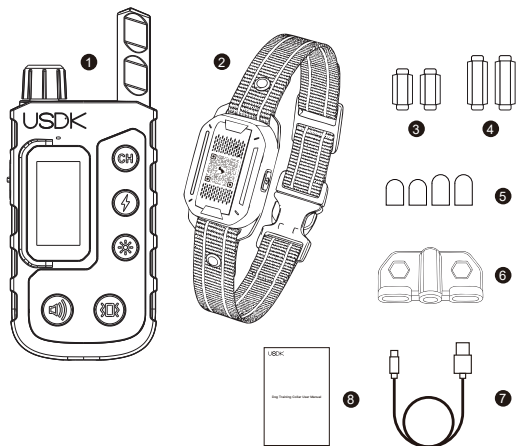

- ❶ Remote Transmitter x1
- ❷ Collar Receiver (with Adjustable Collar Strap) x1
or x2(Varies by package)
- ❸ Short Contact Point x 2
- ❹ Long Contact Points x 2
- ❺ Conductive Silicone Caps x 4
- ❻ Test Light x 1
- ❼ USB Charging Cable x 1
- ❽ User Manual x 1

II .Product Specifications

Remote Transmitter

Battery	3.7 V, 300 mAh
Charging Voltage	5 V (USB Type-C)
Charging Current	Approx. 330 mA
Charging Time	2–4 hours
Remote Range	Up to 4500FT

Receiver Collar


Battery	3.7 V, 300 mAh
Charging Voltage	5 V (USB Type-C)
Charging Current	Approx. 330 mA
Charging Time	2–4 hours
Vibration Levels	1–99
Tone Levels	1–8
Static Levels	1–99
Light	White light stays on White light flashes

III.Product Description


Remote Transmitter

Mode/Intensity Dial


- Press to select Tone, Vibration, or Static.
- Rotate to adjust the selected intensity level.

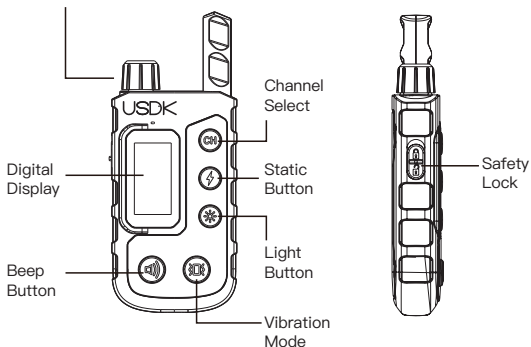


Screen Display

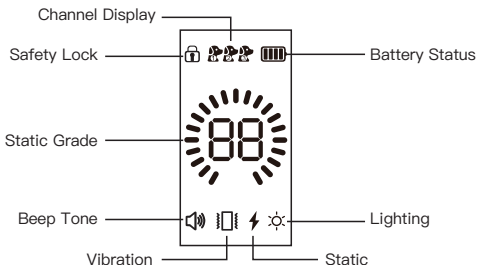


Receiver

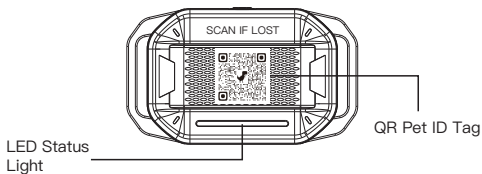

Type-C
Charging



Power
Button

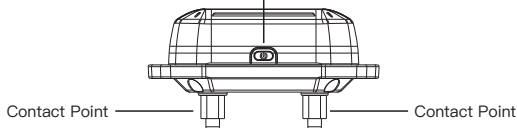

IV. Pairing the Receiver Collar with the Remote Transmitter

If the remote and collar become disconnected (e.g., due to signal interference or power loss), follow these steps to pair them again:

1. Press the Channel Switch button on the Remote Transmitter to select the desired channel (1, 2, or 3).
2. Turn off the collar receiver.
3. Press and hold the Power button for 3 seconds until the green light flashes rapidly (every 0.5 s), indicating Pairing Mode.
4. Press any function button on the remote (Beep, Vibration, Shock, or Light).
5. When pairing is successful, the collar emits one long beep, and the green light stops flashing.

For 1 Remote Transmitter to 3 Receiver Collars: Repeat the steps above to pair each Receiver Collar with a different channel.

V. Remote Transmitter Operation

Safety Lock (Anti-Accidental Touch)

Prevent accidental button presses during transport or storage.

Lock: Slide the safety lock upward to disable all function buttons.

Unlock: Slide the safety lock downward to restore all button functions.

Tip: When locked, pressing any button will briefly display the battery and lock icons.

Intensity Adjustment

Press the Mode/Intensity Dial to enter adjustment mode.—
Adjust the stimulation intensity for your selected training mode.

Rotate the wheel to increase (+) or decrease (–) the level.

*Static Stimulation: Levels 1–99

*Vibration: Levels 1–99

*Press any function button or wait 15 seconds to save and exit.

*Beep: Levels 1–8

Channel Switching (Multi-Dog Control)

Control up to 3 receiver collars with one remote.

*Press the Channel button to switch between Dog 1 / Dog 2 / Dog 3.

*The selected channel icon will remain displayed on the screen.

*Each receiver collar must be paired with a different channel.

Core Function Buttons

Use the dedicated function buttons to activate your selected training mode.

*Beep — Emits an audible training tone.

*Vibration — Delivers vibration stimulation.

*Static Stimulation — Delivers adjustable static stimulation.

*LED Light — Activates the receiver LED for visibility in low-light conditions.

Remote Transmitter Indicators

Understand the status of your remote transmitter at a glance.

- *Green Indicator On — Signal transmitted successfully.
- *Function Icon Flashing — Function selected.
- *Function Icon Steady On — Function active.
- *Battery Icon Flashing — Charging in progress.
- *Battery Icon Full — Fully charged.
- *Low Battery Icon — Recharge the transmitter.

VI. Collar Receiver Operation and Indicator

Power On / Off

***Power On:** Short press the Power button. The receiver vibrates once, and the indicator light flashes green briefly before turning off.

***Power Off:** Press and hold the Power button for 2 seconds. The receiver vibrates, and the indicator light flashes green briefly before turning off.

Receiver Indicator Light


Indicator Status	Description
Green light flashes briefly, then turns off	Collar Receiver Power On
Green light flashes quickly (every 0.5 seconds)	Pairing Mode
Red light flashes briefly, then turns off	Collar Receiver Low Battery
Red light flashes slowly	Charging in progress
Solid Green (while charging)	Fully charged
White Light Flashing or Steady On	Press the Light Button on the Remote Transmitter

Pet ID & Lost Pet Protection

Every receiver collar has its own unique QR code and ID number, allowing you to create a personalized pet profile.

Scan the QR code on the Collar Receiver to create your pet's profile and add important information, including:

- Pet's name
- Your contact details (such as your phone number, email address, or WhatsApp)
- Additional information (optional)



If your pet is ever lost, anyone who scans the QR code can view the information you've chosen to share and contact you directly, helping reunite you with your pet as quickly as possible.

Note: Keep your contact information up to date so you can be reached if your pet is found.

VII. Precautions for Use

- 1.If your pet has any health issues or a heart condition, consult your veterinarian before use.
- 2.The Shock and Vibration functions automatically stop after 10 seconds of continuous activation. Avoid prolonged or repeated use to prevent discomfort or injury to your pet.
- 3.When the Remote Transmitter is not in use, enable the Safety Lock to prevent accidental activation of stimulation functions.
- 4.The Remote Transmitter and Receiver Collar must be paired to the same channel to operate together. Switch to the corresponding channel before controlling a different Receiver Collar.
- 5.When the Receiver Collar indicator flashes red slowly, recharge the battery promptly to avoid interruptions during training.
- 6.Ensure the Receiver Collar fits snugly but comfortably. You should be able to fit two fingers between the collar and your pet's neck.
- 7.Do not leave the Receiver Collar on your pet for more than 8–12 hours per day. Remove it regularly and check the skin for signs of irritation.
- 8.Begin training with the lowest effective stimulation level and increase gradually only if necessary.
- 9.Use the device only for training purposes. Do not use it to punish or intentionally frighten your pet.
- 10.Do not use the device on puppies under 6 months of age or on pets that are injured, ill, pregnant, or have skin conditions around the neck.
- 11.Clean the contact points and your pet's neck regularly to help prevent skin irritation.
- 12.Although the Receiver Collar is designed with a sealed housing for water resistance, avoid prolonged immersion in water. Ensure the charging contacts are clean and dry before charging.
13. Keep out of reach of children.

VIII.FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

IX.Customer Support

We are committed to providing reliable support and ensuring you have the best experience with your product.

If you experience any issues during use, please contact our Customer Support team. Our team will assist you with troubleshooting, product guidance, and after-sales support.

To help us provide faster and more efficient assistance, please provide:

- Your order number
- A description of the issue
- Photos or videos of the problem (if available)

Our support team will review your request and provide the best possible solution.

E-mail: 13691735485@163.com