

Instruction Manual

Smart Wall Socket User Guide

Wi-Fi



Notes Before Installation

1. Wi-Fi Only support a 2.4GHz network (802.11 b/g/n)
2. Neutral wire Required.
3. Basic electrical wiring knowledge or experience required, or please consult a professional electrician
4. Do not access more than the maximum power of the device design
5. ON/OFF Button also can be used as reset button, long press to reset your smart socket to factory defaults. Only do this if you are sure you want to erase all your settings



WK-US2U-WH-MS-EF09

- Bitte scannen Sie den QR-Code, um das deutsche Handbuch, das Installationsvideo und die Funktionseinführung zu erhalten
- Escanee el código QR para obtener el manual en español, el video de instalación y la introducción de la función
- Veuillez scanner le code QR pour obtenir le manuel en français, la vidéo d'installation et l'introduction des fonctions
- Отсканируйте QR-код, чтобы получить руководство на русском языке, видео по установке и описание функций
- Scansionare il codice QR per ottenere il manuale in italiano, il video di installazione e la guida alle funzionalità. Video di installazione e funzionalità
- Leia o código QR para obter o manual em português, o vídeo de instalação e a introdução das funções
- Zeskanuj kod QR, aby uzyskać instrukcję obsługi, film instalacyjny i wprowadzenie do funkcji
- QR コードをスキャンして、日本語のマニュアル、インストールビデオ、機能紹介を入手してください
- QR 코드를 스캔하면 한국어 설명서, 설치 동영상, 기능 가이드를 볼 수 있습니다
- من فضلك قم بمسح رمز الاستجابة السريعة (QR-code) للحصول على دليل المستخدم باللغة العربية وفيديو التثبيت ووصف الوظائف




请扫描二维码获取中文的说明书、安装视频及功能介绍

Specifications

Type	Smart Wall Socket
Model	KS-604S
Power supply mode	Neutral-Live Wire
Rated Current	15A(Max)
Rated Voltage	AC110~125V-50/60Hz
Load Power	Single 1500W Total 2500W Inductive Load<2000W
USB Output	5V/2.1A
Wireless Frequency	2.4GHz
Wireless Standard	IEEE802.11 b/g/n

Indicator light meaning

Indicator	Status	Description
Green	Rapidly blinks	Ready for connection (Default Mode Only)
Green	Slowly blinks (1 time every 3S)	Ready for connection (AP Mode Only)
Red light is off	Off	Turn the light off
Red light is shining on	On	Turn the light on
Green	Flash Slowly	No Internet

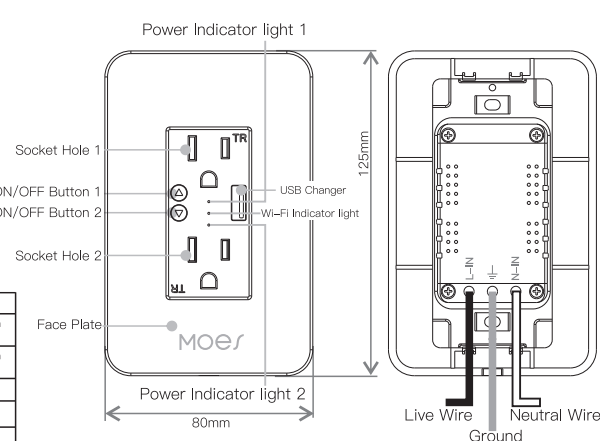

Safety Notice:


- Cut off the power before installation
- Please use it only when it's installed with RCD or current leakage protector at home

1

Installation Guide


STEP.1

Turn off circuit breaker
Find your socket's control in your circuit breaker and turn it off, ensure the socket power off completely.

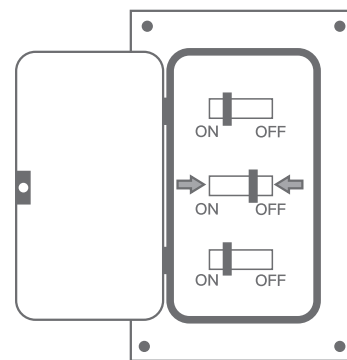

STEP.2

Remove the original socket
In the wall cassette, find the neutral wire line wire and ground wire.




⚠ If your original socket is also two jacks, you may find 4 or 5 wires. Please find the neutral wires Line wires and ground wires. This smart socket only needs to use the neutral wires Line wires and ground wires, other lines do not need to be connected

2

STEP.3

Label your wires

Mark or record the corresponding line before removing the old socket.

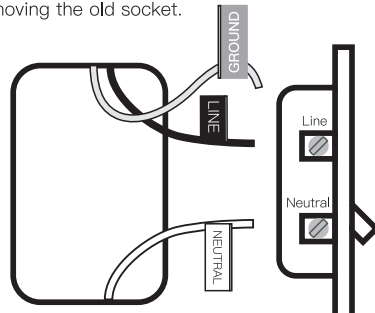


Usually:
White represents the neutral line
Black represents the fire line
Green or yellow or a single bare copper wire representing the ground wire
The above is for reference only and cannot be used as a standard.

STEP.4

Install socket

Use wire-nuts to connect the socket wires to your home wires, following the diagram. Be careful to match line. Then remove the stickers, screw the socket into the wall. And attach the faceplate.

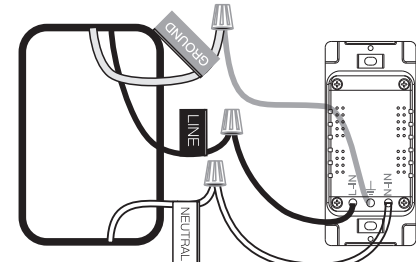


⚠ For safety, please connect the ground wire

3

STEP.5

Turn on circuit breaker


Turn on your socket's power from the circuit breaker. Press the socket a few times to make sure it works.

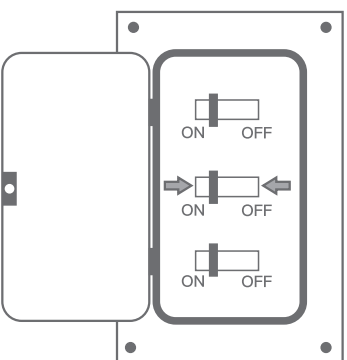

STEP.6

Check the Wi-Fi light

Tap NEXT when the Wi-Fi indicator light blinks

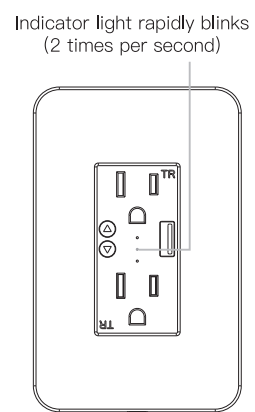

4

Preparation for use

1. Download MOES App on App store or scan the QR code.



MOES application is much more compatible than Tuya smart / smart life application. It also provides a new customized service for controlling scenes through Siri, widgets and scene recommendation.
(Note: Tuya smart / Smart Life app is still working, but moes app is highly recommended)

2. Registration or Log in.

- Download "MOES" Application.
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a MOES account.

Add the switch to MOES APP

Note: This smart socket can only support 2.4G network and cannot work with 5.0G network, please check if your home network is 2.4G and make sure that your phone has been connected to your Wi-Fi home network

How to reset/repair device


Hold the anyone ON/OFF button for 7 seconds for reset. Until light flash, the device enters the reset state.

Steps for connecting the APP to the device


1. First, make sure that WiFi is turned on. If not, turn on WiFi.
2. Open MOES App and Click "+" Choice "Add Device", then the prompt page will automatically show on the screen. Click "Add", Enter Wi-Fi Password and click "Next", waiting for the connection completed.

5

3. Add the device successfully, you can edit the name of the device to enter the device page by click "Next".

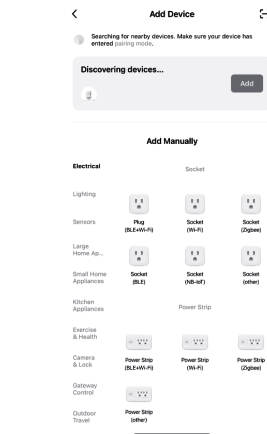

4. Click "Done" to enter the device page to enjoy your smart life with home automation.

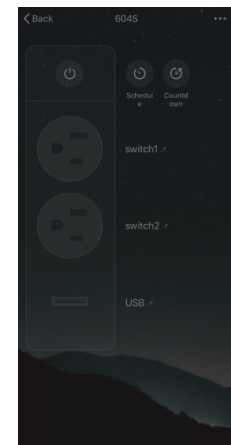

6

Control your home with your voice

Devices are compatible with Amazon Alexa and Google Home supported functionalities. Please see our step-by-step guide on: <https://www.moestech.com/blogs/news/smart-device-linked-voice-speaker>

Trouble shooting

If you have problems installing or operating your device, please review its product data sheet: <https://www.moestech.com/blogs/news/wk-us2u>

FCC compliance statement

FCC Compliance Statement for KS-604S
This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

7

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement:
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.



8

FOLLOW US

- @moessmart
- MOES Official
- @moes_smart
- @moes_smart
- @moes_smart
- www.moess.net

UK REP EVATOST CONSULTING LTD
Address: Suite 11, First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR
Tel: +442921680945
Email: contact@evatmaster.com

EC REP AMZLAB GmbH
Laubenhof 23, ESSEN 45326
Email: info@amz-lab.de
Tel: +491745298066
Made In China

WENZHOU NOVA NEW ENERGY CO.,LTD
Address: Power Science and Technology Innovation Center, NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China
Tel: +86-577-57186815
After-sale Service: service@moeshouse.com

9