


# KWS-066C USB Tester

## User Manual

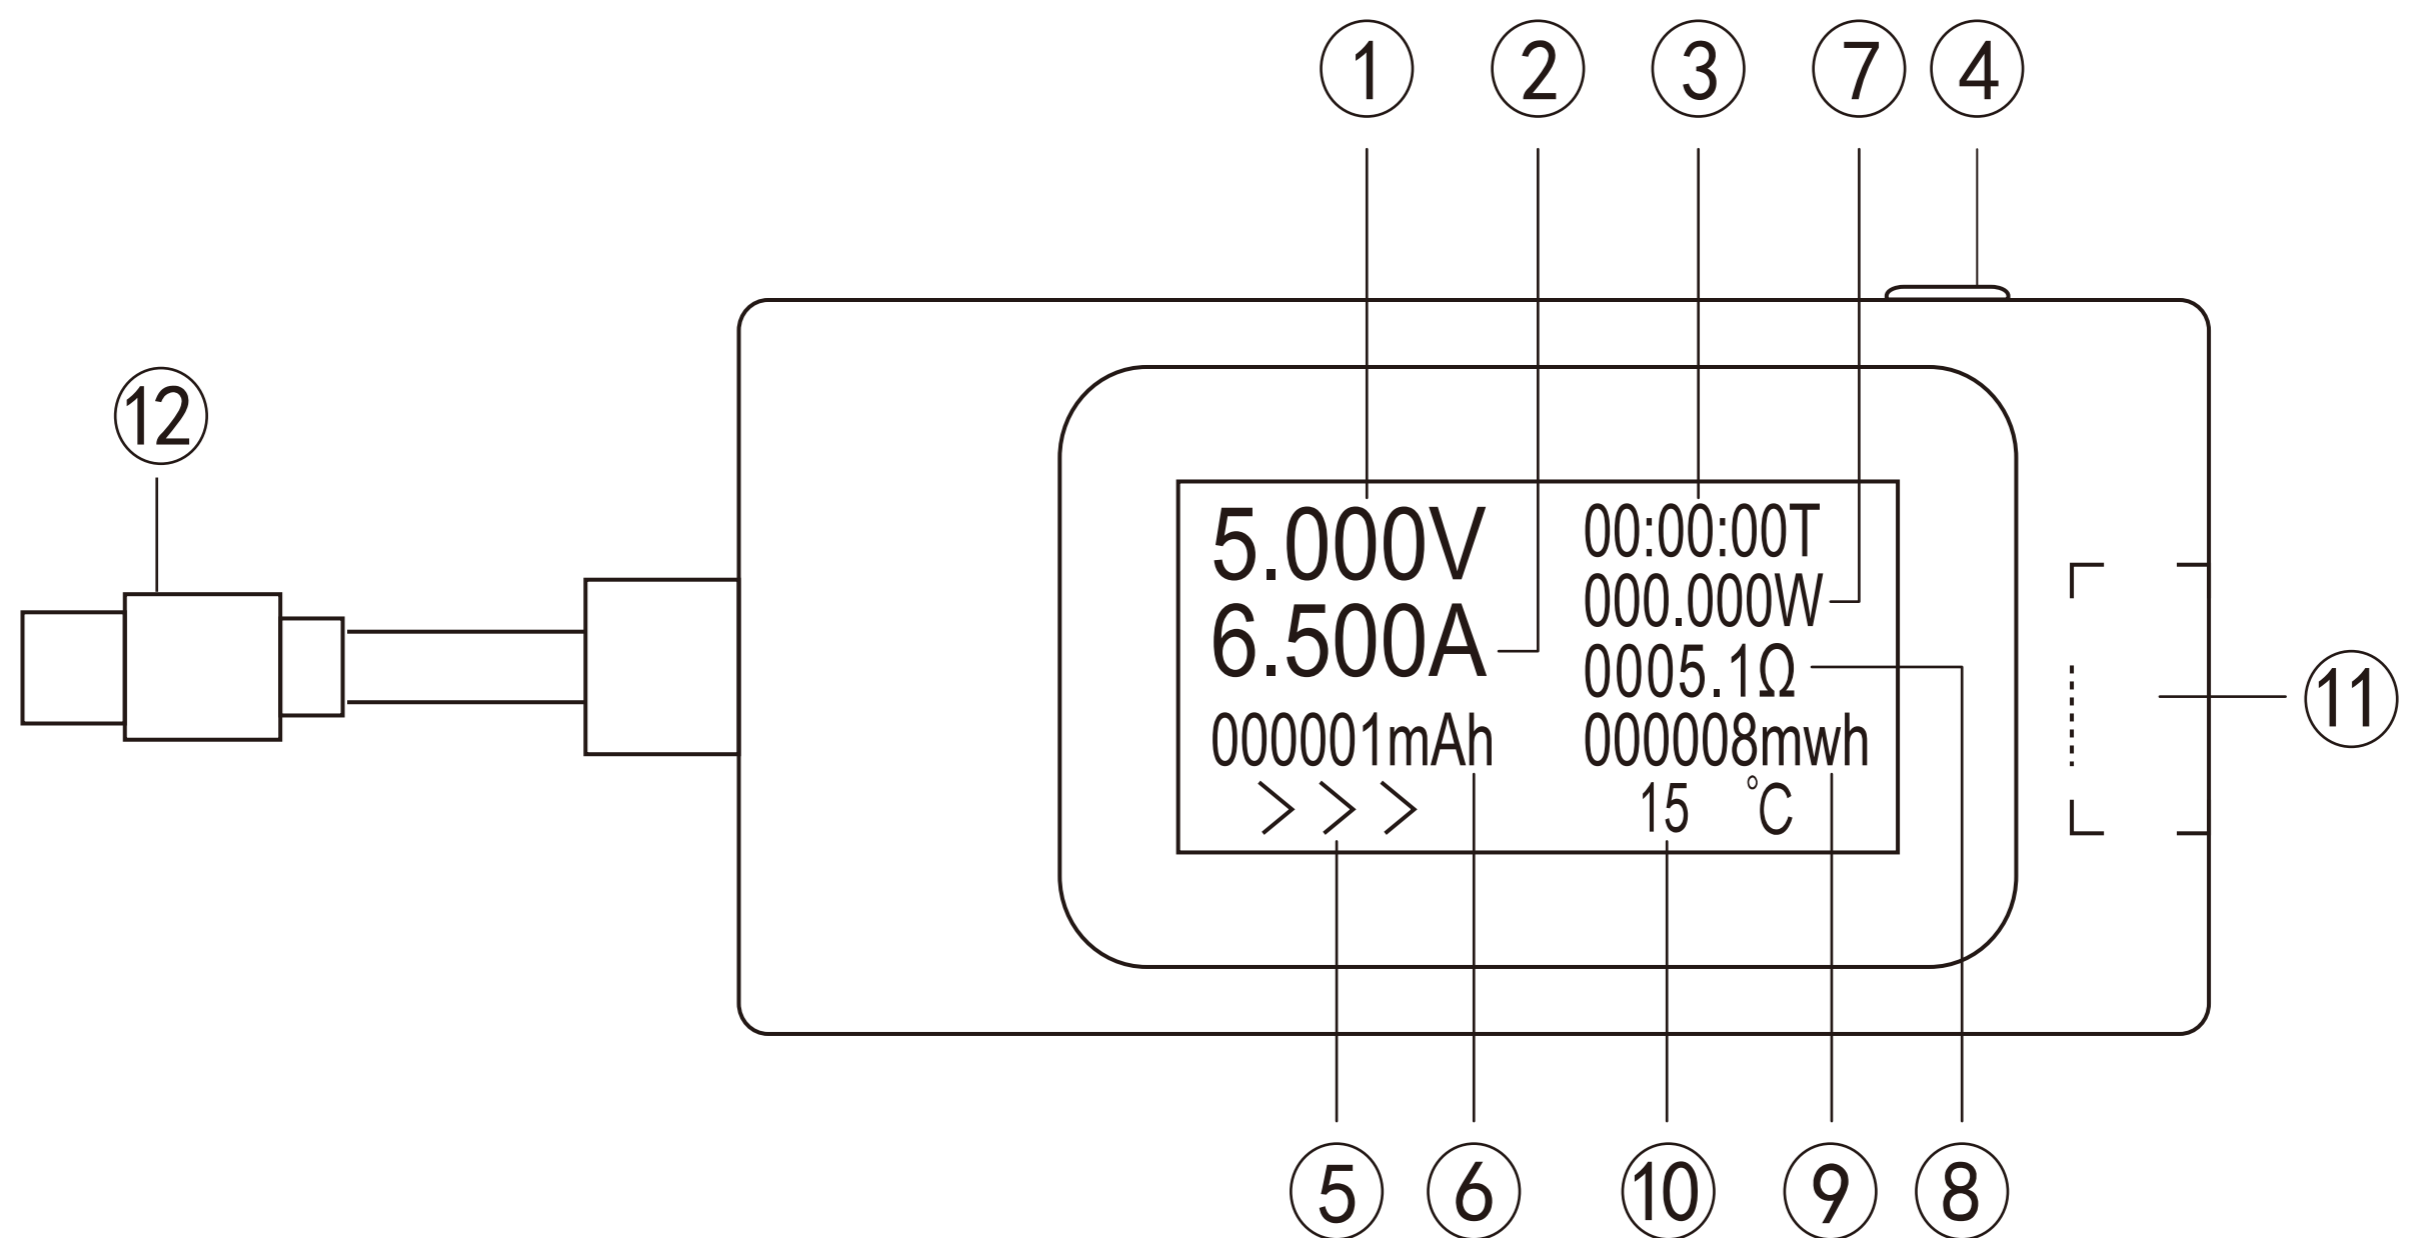

### Product Parameters

- |                                       |                                     |
|---------------------------------------|-------------------------------------|
| 1.Voltage: 4-30V                      | 2.Current: 0-6.5A                   |
| 3.Timing: 0-99hours                   | 4.Finction button                   |
| 5.Direction of current                | 6.Capacity: 0-999999mAh             |
| 7.Power: 1-195W                       | 8.Resistance: 0-999Ω                |
| 9.Energy: 0-999999mWh                 | 10.Temperature: 0-80 °C             |
| 11.Type-C Port Female: Input / Output | 12.Type C Port Male: Output / Input |

### Functional Instructions

1. Click the button once to switch screens in a cyclical manner.
2. Double-click the button to rotate the displayed content.
3. Press and hold the button (3 seconds): Clear all capacity (mAh), amount of electricity (mWh) and timing.
4. The product has power off memory function.
5. The product has the function of bidirectional charging measurement.

### Calibration Method

- 1.If it is powered by the USB A charger, press and hold the button and then connect the power supply (no need to connect the load), the USB tester will automatically calibrate.
- 2.If it is powered by a PD charger, press and hold the button and then connect the power supply (requires a load to be connected), the USB tester will automatically calibrate.

### Customer Service

Search “YOJOCK” on Amazon, you can find our store and contact us. We will reply you within 24 hours.  
Contact Email: [Serviceyojock@outlook.com](mailto:Serviceyojock@outlook.com)