



Newton Pro Freezer 4-Color (BWRY)

Electronic Shelf Label Datasheet

2026-09-18

Summary

This datasheet presents the general performance and specifications of Newton Pro Freezer 4-Color (BW) Label for SOLUM Electronic Shelf Label (ESL) System.



© SOLUM. All rights reserved

The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means without the express written consent of SOLUM.

This document is subject to change without notice.

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR SOLUM REPRESENTATIVE FOR A COPY.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. SOLUM AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL SOLUM OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF SOLUM OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

SOLUM and the SOLUM logo are trademarks or registered trademarks of SOLUM and/or its affiliates in KOREA and other countries. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between SOLUM and any other company.

©2016-2026 SOLUM Co. Ltd, Inc. All rights reserved.

Table of Contents

1. Preface	6
1.1. About This Guide	6
1.2. Audience.....	6
1.3. Abbreviations and Acronyms	6
2. Overview	7
3. Specification	7
3.1. Product Specification	7
3.2. Radio (RF) Specification	9
3.3. NFC Specification	9
3.4. Features	10
3.5. Mechanical Drawing	11
3.5.1. 2.2"	11
3.5.2. 2.6"	12
3.5.3. 2.9"	13
3.6. Label Marking	14
3.7. Initial Display Image (E-Label)	17
3.8. Certifications	18
3.8.1. FCC.....	18
3.8.2. ISED.....	19
3.8.3. CE.....	20
3.8.4. KC.....	20
4. Packaging.....	22

4.1.	2.2"	22
4.2.	2.6"	24
4.3.	2.9"	26
5.	Reliability Test	28
6.	Product Handling Precautions	31
6.1.	Usage Environment	31
6.2.	Storage and Use	31
6.3.	Product Cleaning	32
6.3.1.	For Spray Cleaning:	32
6.3.2.	For Wet Tissue Cleaning:	33
6.4.	Battery Replacement	33
7.	Battery Handling Guide	35
7.1.	Avoiding hazards in lithium battery handling	35
7.2.	Proper Storing and Disposing of Lithium Batteries	37

Document History

Rev.	Date	Revision History	Page
v0.1.0	2026-09-18	Draft	-



1. Preface

1.1. About This Guide

This datasheet presents the specifications and general performance of SOLUM's Newton Pro Freezer 4-Color (BWRY) Electronic Shelf Labels (ESLs) lineup.

1.2. Audience

This manual is intended for any user (IT, operations, store managers, installers, etc.) authorized to operate and install SOLUM ESLs.

1.3. Abbreviations and Acronyms

Terminology/Abbreviation	Description
GW	Gateway
ESL	Electronic Shelf Label
RF	Radio Frequency
IT	Information Technology
PoE	Power over Ethernet
TBD	To Be Decided

2. Overview

SOLUM Newton Pro Freezer 4-Color (BWRY) Electronic Shelf Labels (ESLs) are components to a total SOLUM's ESL System. The SOLUM's ESL System consists of the ESLs, Gateway(s), Server, and optional accessories (such as the Newton Pro Remote Controller) and is used to electronically displays key information such as price and Product information, that are traditionally printed or written on paper in environments like supermarkets, warehouses, and factories.

SOLUM's Newton Pro Freezer 4-Color (BWRY) ESLs are the industry leading solutions that Provide the longest battery life, fastest update speed, built in LEDs, built in button IP68 rating for various environments, multiple pages per ESL, and more to take the operation beyond just displaying information on the ESLs.

Newton Pro Freezer 4-Color (BWRY) ESLs come in various sizes and colors to meet all customer use cases. They are battery powered for ease of deployment and wirelessly receive updates from SOLUM Gateway for.

3. Specification

This section details the specifications of each ESL by size. ESLs are identified by the diagonal measurement of the display in inches. For example, a 2.9" ESL refers to an ESL with the diagonal display dimension of 2.9".

3.1. Product Specification

Item	Description	
Label Dimensions (W x H x D)	2.2"	67.0 x 37.4 x 10.45 mm / 2.64 x 1.47 x 0.41 in
	2.6"	79.2 x 42.5 x 10.45 mm / 3.12 x 1.67 x 0.41 in
	2.9"	85.9 x 41.3 x 10.45 mm / 3.38 x 1.62 x 0.41 in
Display Dimensions (W x H)	2.2"	48.1 x 26.0 mm / 1.89 x 1.02 in
	2.6"	60.0 x 30.7 mm / 2.37 x 1.21 in

	2.9"	67.6 x 29.6 mm / 2.66 x 1.16 in
Display Resolution	2.2"	296 x 160 pixels (156 dpi)
	2.6"	360 x 184 pixels (152 dpi)
	2.9"	384 x 168 pixels (144 dpi)
Label Weight	2.2"	32.65 g / 1.15 oz
	2.6"	38.40 g / 1.35 oz
	2.9"	40.25 g / 1.42 oz
Viewing Angle	Nearly 180°	
Display Colors	●○●● BWRY (Black, White, Red, Yellow)	
Battery	2.2"	Coin Battery (CR2450D) X 2
	2.6"	Coin Battery (CR2450D) X 2
	2.9"	Coin Battery (CR2450D) X 2
Wireless Communication	2.4 GHz Unlicensed ISM band for BLE physical layer with SOLUM Proprietary Protocol	
Communication Distance	98 feet (30m) radius Line of Sight	
Security	128-bit AES Encryption	
Compliance (TBD)	FCC, ISED, CE, UKCA, MIC, KC, RoHS, WEEE	
Operating Temperature	-25°C ~ 0°C (-13°F ~ 32°F)*	
Storage Temperature	0°C ~ 40°C (32°F ~ 104°F) @45~70% RH	

**Freezer ESL must be used in freezer environments.

3.2. Radio (RF) Specification

Item	Parameter	Specification			Unit	Condition
		Min	Typ	Max		
Tx	Tx Power	-	4	-	dBm	
	[Carrier Frequency Offset and Drift]	-75	0	75	kHz	
	Tx Current	-	-	10	mA	Total current at max Tx Power
Rx	Receiver Sensitivity	-85	-	-	dBm	PER < 5%

3.3. NFC Specification

Item	Parameter	Specification			Unit	Condition
		Min	Typ	Max		
NFC	Read Distance	-	0.7	-	in	
		-	20	-	mm	

The NFC antenna location is shown for each ESL size.

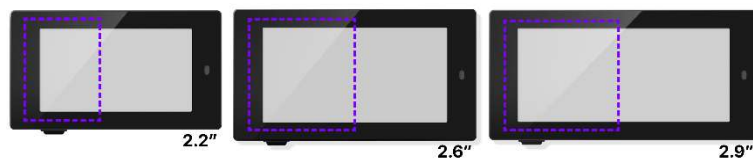


Figure 1. NFC LOCATION

3.4. Features


Some of the features of SOLUM ESL.

- Low power consumption
- Real-time update speed
- SOLUM Proprietary Protocol communication with SOLUM Gateway for added security

Item	Description
LED	7 colors (Red, Green, Blue, Yellow, Cyan, Magenta, White)
Usable Pages	10 pages each
NFC	Built-in Felica NFC Forum Type 3
IP Rating	IP68
Housing Bezel Color	Black, White

3.5. Mechanical Drawing


3.5.1. 2.2"

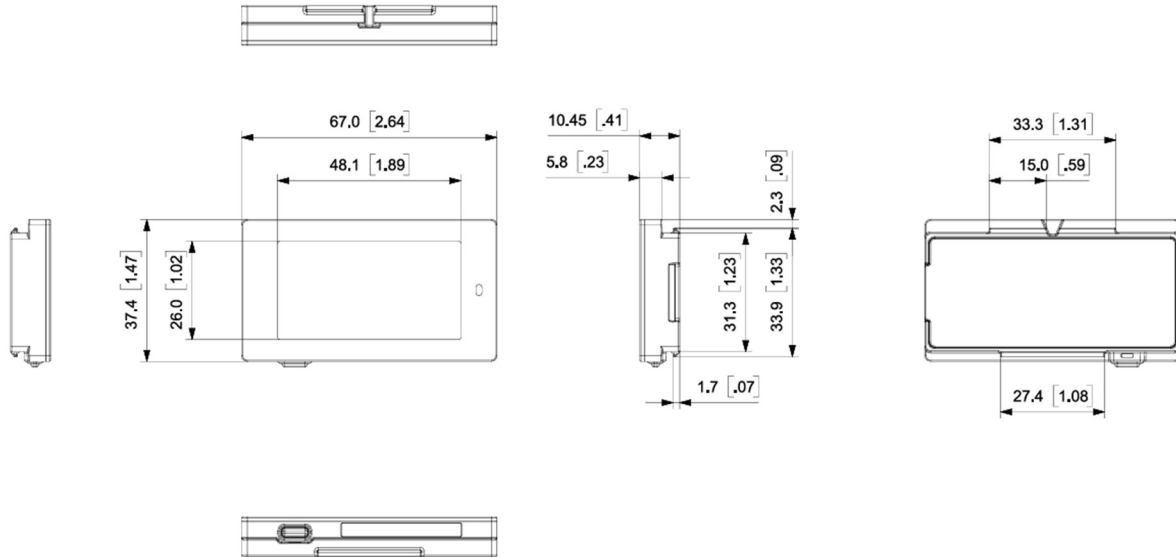

(Unit: mm)

Figure 2. 2.2" MECHANICAL DIMENSION


3.5.2. 2.6"

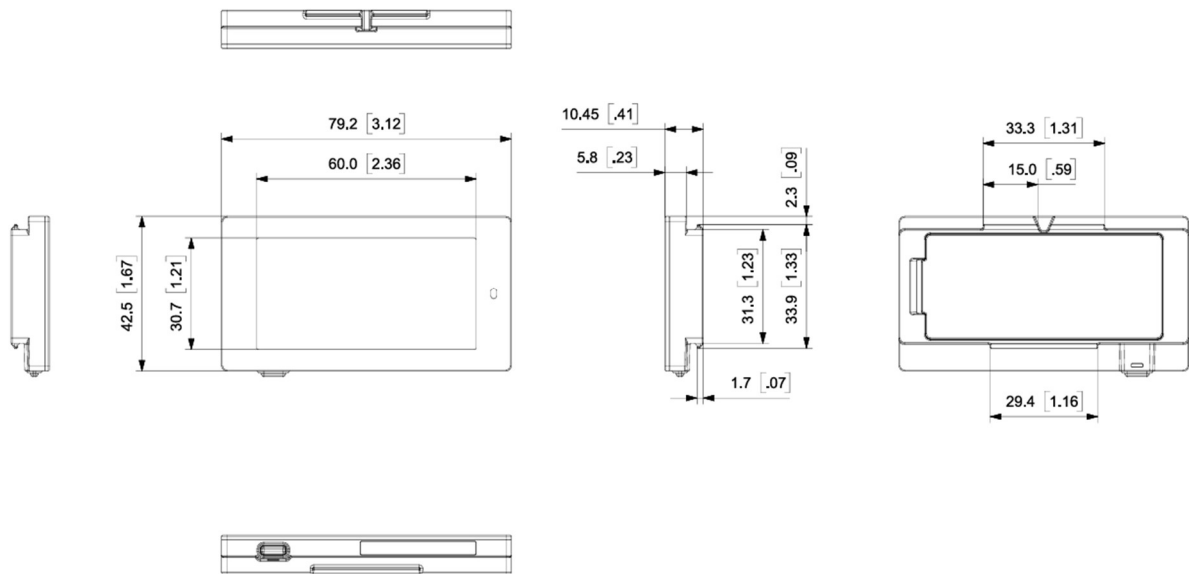

(Unit: mm)

Figure 3. 2.6" MECHANICAL DIMENSION

3.5.3. 2.9"

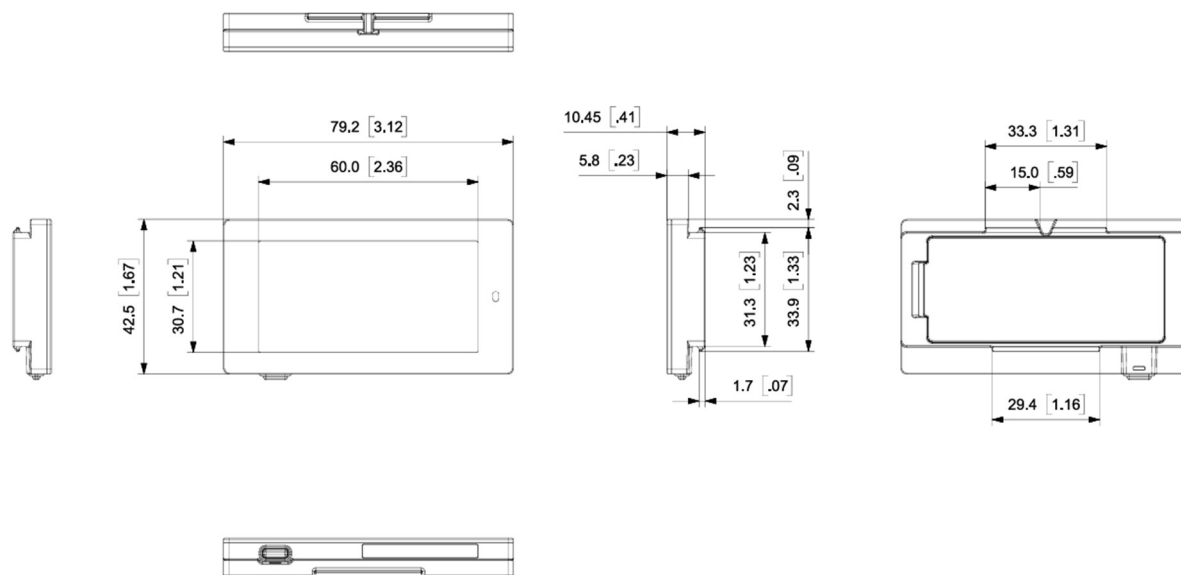

(Unit: mm)

Figure 4. 2.9" MECHANICAL DIMENSION

3.6. Label Marking



Figure 5. ESL LABELS (PRODUCT)

ESL-specific information can be found on the sticker label located on the back of the ESL. Information displayed includes, but is not limited to: Model, Certifications, Manufacturing Information

- Model: **EL**①②③④**6**⑤⑥⑦ (i.e. ELF26R6W4A)
 - ①②③: ESL Display Size & Type
 - ✓ F22= 2.2" Freezer
 - ✓ F26= 2.6" Freezer
 - ✓ F29= 2.9" Freezer
 - ④: Main IC Maker
 - ✓ R= Realtek
 - ⑤: Housing Color
 - ✓ B= Black
 - ✓ W= White
 - ⑥: ESL Display Color
 - ✓ 4= Black, White, Red, Yellow (BWRY)
 - ⑦: ESL Tag Type

✓ A= Button, NFC, LED

Size	Model Name	
	Black	White
2.2"F	ELF22R6B4A	ELF22R6W4A
2.6"F	ELF26R6B4A	ELF26R6W4A
2.9"F	ELF29R6B4A	ELF29R6W4A

MAC Label stickers can be found in multiple areas of the ESL. They are to be scanned for operation. If the ESL is not assigned to a product, the MAC barcode and 12-digit code will be shown on the display. Dimensions can be found in the image below.

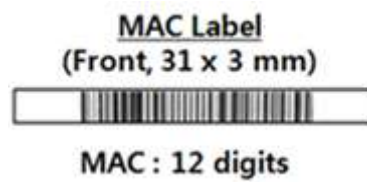


Figure 6. ESL LABELS (MAC)

3.7. Initial Display Image (E-Label)

ESL-specific information can be found in the initial display image of the ESL. The information displayed is not limited to: Model, Certifications, ESL Media Access Control (MAC) Address.



Figure 7. ESL INITIAL DISPLAY IMAGE

How to Access E-Label

- Using the Button (For Models with a Button)
 - (1) Press and hold the button (Long key) to enter the White screen.
 - (2) Press the button briefly (Short key) to display the E-Label screen.

3.8. Certifications

Each ESL has the following certifications and should be noted for your region.

Size	Model	FCC	ISED	CE*	KC	MIC	UKCA	RoHS	WEEE	NCC
2.2"	ELF22F6WMA	O	O	O	O	O	O	O	O	
2.6"	ELF26F6WMA	O	O	O	O	O	O	O	O	
2.9"	ELF29F6WMA	O	O	O	O	O	O	O	O	

IEC 62471 standard (Photobiological Safety of Lamps and Lamp Systems) compliant

*CE: RF/EMC/LVD/RoHS2

3.8.1. FCC

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Caution

THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE.

SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

IMPORTANT NOTE : FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

3.8.2. ISED

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Attention: Tout changement ou modification non expressément approuvé par le fabricant peut annuler le droit de l'utilisateur à utiliser l'équipement.

exposition aux rayonnements radiofréquences. Pour se conformer aux exigences de conformité de l'exposition IC RF, une distance de séparation d'au moins 20 cm doit être maintenue entre l'antenne de cet appareil et toutes les personnes.

This device complies with Industry Canada NRCs applicable to licence-exempt radio devices. The operation is authorized under the following two conditions: (1) the device shall not cause interference, and (2) the user of the device shall accept any radio interference suffered, even if the interference is likely to compromise its operation.

Caution: Any change or modification not expressly approved by the manufacturer may void the user's right to use the equipment.

exposure to radiofrequency radiation. To comply with the ICRF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device

and all persons.

-PMN(Product Marking Name) : ESL Label

-FVIN(Firmware Version Identity Number) : V052

3.8.3. CE



Model Name: ESL Label

Manufacturer: SOLUM CO., LTD.

Address: 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea

Contact: www.solum-group.com / +82-1588-0502

Electrical Ratings: DC 2.4 V - DC 3.3 V

EU Representative: SOLUM Europe GmbH / Frankfurter Str. 10-14, 65760 Eschborn Germany

3.8.4. KC

상호: 주식회사 솔루엠

기자재명칭: 특정소출력 무선기기(무선데이터통신시스템용 무선기기)

제조사/제조국가: 주식회사 솔루엠 / 한국, 베트남

기본모델명	등록연월일
ELF22F6WMA	TBD
ELF26F6WMA	TBD
ELF29F6WMA	TBD



4. Packaging

4.1. 2.2"

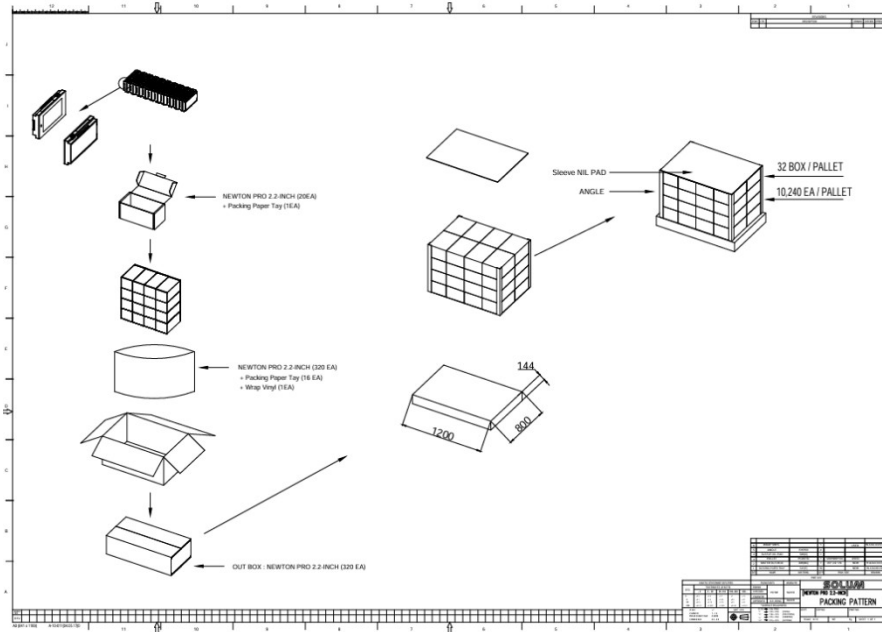


Figure 8. 2.2" PACKING-DIAGRAM (1,200 X 800)

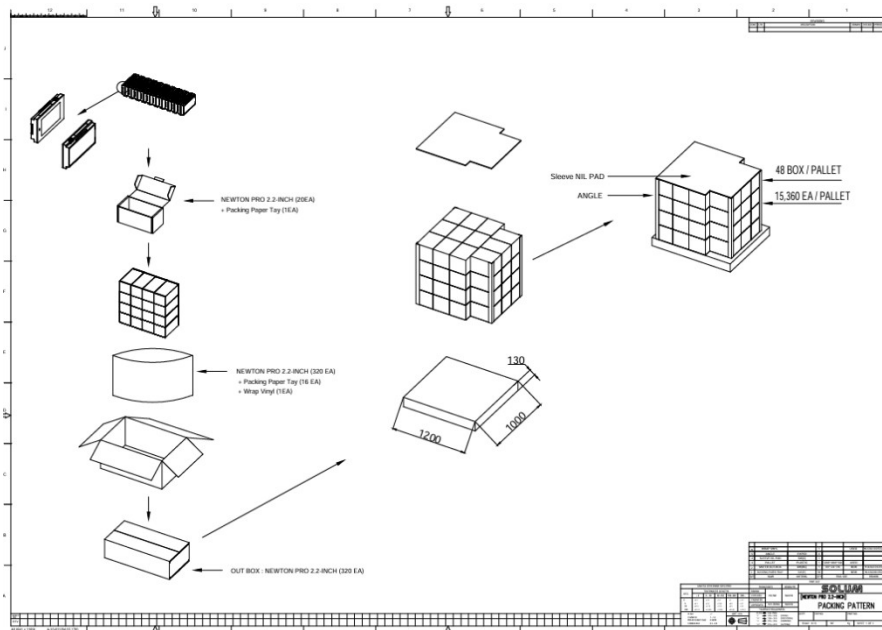


Figure 9. 2.2" PACKING-DIAGRAM (1,200 X 1,000)



4.2. 2.6"

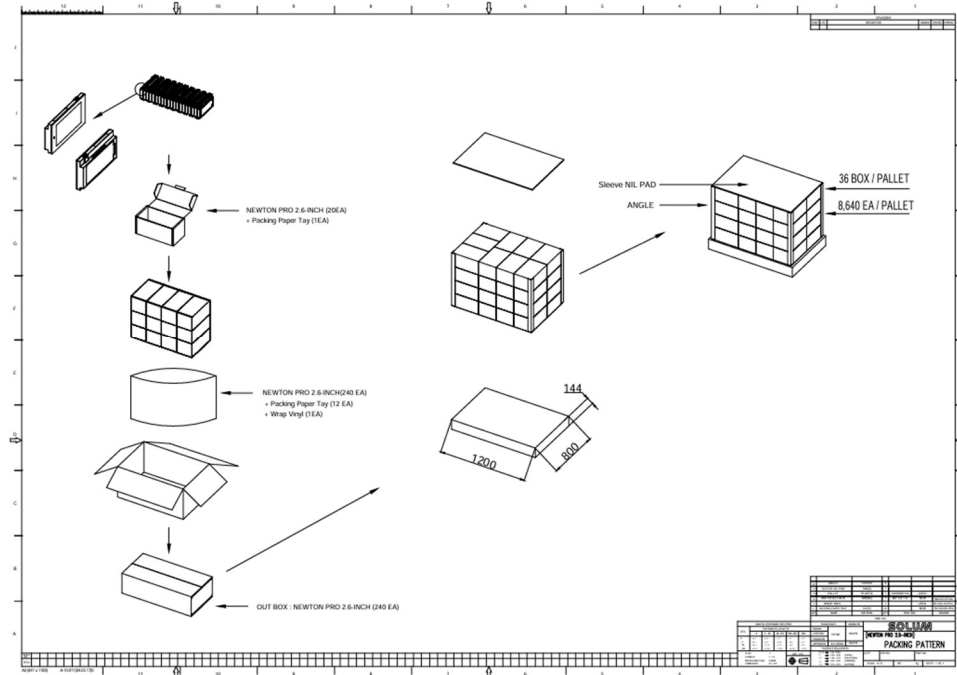


Figure 10. 2.6" PACKING-DIAGRAM (1,200 X 800)

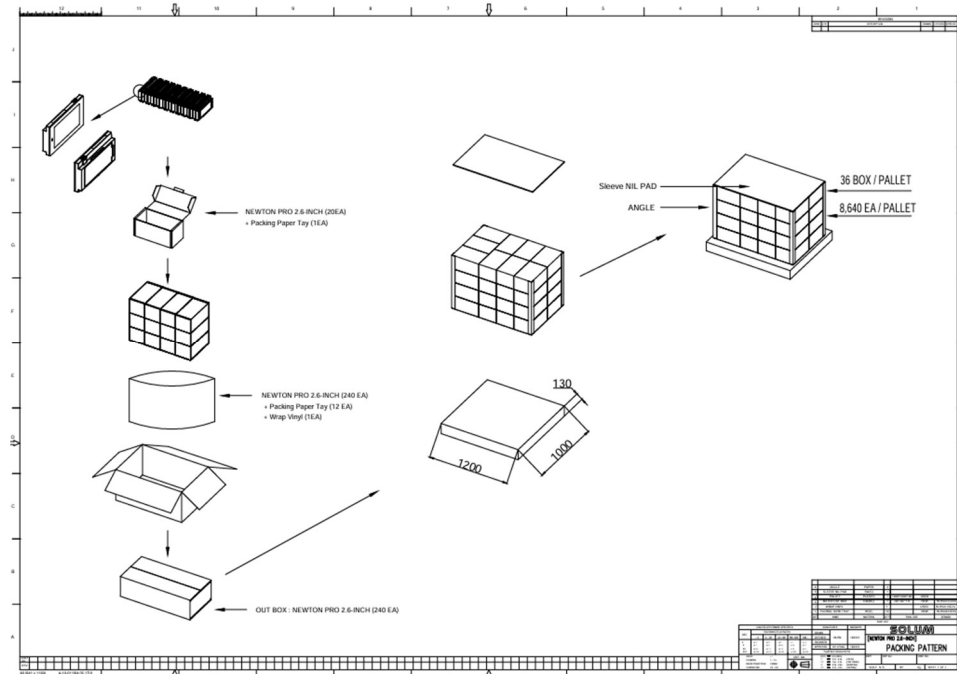


Figure 11. 2.6" PACKING-DIAGRAM (1,200 X 1,000)



[illegible]

The diagram illustrates the packing pattern for the Newton Pro 2.9-Inch (240 EA) product. It shows the following steps and components:

- Newton Pro 2.9-Inch (240 EA) Components:**
 - Newton Pro 2.9-Inch (240 EA) (240 EA) - Packing Paper Tray (11 EA)
 - Newton Pro 2.9-Inch (240 EA) (240 EA) - Packing Paper Tray (12 EA)
 - Newton Pro 2.9-Inch (240 EA) (240 EA) - Wrap Vinyl (1 EA)
- Assembly:**
 - The Newton Pro 2.9-Inch (240 EA) components are assembled into an **OUT BOX - NEWTON PRO 2.9-INCH (240 EA)**.
- Palletization:**
 - The out boxes are placed on a **36 BOX / PALLET**.
 - The **ANGLE** of the out box is indicated.
 - The **Sleeve NBL PAD** is shown.
 - The **8,640 EA / PALLET** quantity is indicated.
- Dimensions:**
 - The out box dimensions are **1200** (length) and **1000** (width).
 - The sleeve NBL pad dimension is **130**.

The diagram also includes a **Packing Pattern** table and a **Newton Pro 2.9-Inch (240 EA)** table.



5. Reliability Test

SOLUM conducts the following reliability tests in accordance with internal standards to verify that the product maintains its specified performance in retail operating environments and throughout distribution. Each test is designed with reference to the operating and storage environment specifications stated in this document.

Operating Environment Test (Temperature and Humidity)

Image update and communication operations are repeatedly performed within the range specified in the "Operating Environment" section of this document to verify display quality and operational stability.

Storage Environment Test (Temperature and Humidity)

Operation is verified after storage under the conditions specified in the "Storage and Warehousing" section of this document, confirming that environmental exposure during storage does not affect product quality.

Temperature Shock Test (Storage)

Temperature variation environments that may occur during storage and transportation are simulated to verify the structural and operational integrity of the product.

Electrostatic Discharge (ESD)

Test Electrostatic discharge environments that may occur during product handling are simulated to verify normal operation following discharge.

Product Drop Test

Drop situations that may occur during installation and replacement work are simulated to verify the appearance and operating status of the product.

Package Drop Test

Impacts that may occur during distribution and handling are simulated to verify the protective

performance of the product in its packaged state.

Package Vibration Test

Vibration environments occurring during transportation are simulated to verify the protective performance of the product in its packaged state.

Wireless Communication Performance Test

The operating environment between the gateway and the tag is simulated to verify the stability of wireless reception and image update operations.

Waterproof Test

Water immersion environments are simulated based on the protection rating stated in the "Ingress Protection" section of this document to verify normal operation after immersion.

6. Product Handling Precautions

Provisions should be made to protect against any damage to the product caused by improper handling. The purchaser assumes any responsibility for damage to the product caused by improper handling.

Product should be stored in 0°C ~ 40°C (32°F ~ 104°F) @45~70% RH environment and should be installed within **90 days** of receipt.

6.1. Usage Environment

Take extra caution when using this RF device in the vicinity of other electronic devices and appliances. Most electronic devices and appliances use electromagnetic waves. Electromagnetic waves emitted by this RF device can affect other electronic devices and appliances.

If using the device in an explosion hazard area, follow all safety regulations, instructions, and signals.

6.2. Storage and Use

- The product is shipped in sleep mode (displaying a white screen) and can be activated by pressing the button, using an NFC remote control, or via the mobile app.
- Moisture and liquids can damage internal parts and circuit boards if allowed to enter into the device itself.
- Do not place or store the product on a sloped surface. The product may slide and fall off the surface and become damaged.
- Use the product in temperatures ranges of **-13°F ~ 32°F (Freezer)**. Parts and circuits may be damaged if operated or stored in extreme temperature.
- The display panel needs extra care during handling.
 - Do not apply any impacts on the e-Paper display as it is fragile.
 - Continuous exposure to excessive moisture (over 70% RH) or UV shortens display lifetime.
 - Ghosting image may appear in temperature conditions of less than **-25°C / -13°F for freezer tags**. (If $\Delta L^* > 2$, we call it ghosting phenomenon)

- Avoid areas with strong magnetism or subject to magnetism. Contact between the device and a magnetic object can lead to malfunctions.
- Do not place the product near heat-producing kitchen appliances like a stove or a microwave or in the vicinity of highly pressurized containers.
- External impact to the product, such as from being dropped, can damage the product.
- Twisting and bending the product can damage the exterior casing and the internal components.
- If this product operates abnormally while removing battery or replacing battery, it needs to be discharged by contacting the battery terminals (+) and (-) in the product.
- This product uses the 2.4GHz frequency band for the wireless communication network. Radio communications can be limited or affected by other applications that share the same frequency band, such as Wi-Fi, Bluetooth, Zigbee, etc.
- A prior investigation into the radio environment is strongly required for efficient and smooth installation.
- Frequent communications, updates and screen renewals may reduce battery life time.
- Low temperature environments may reduce battery life.
- FIFO (First In First Out)

6.3. Product Cleaning

6.3.1. For Spray Cleaning:


Steps

- (1) Lightly spray all surfaces and wait a few seconds.
- (2) Gently wipe clean using a cloth or tissue.
- (3) Let the labels dry.

Notes

- Use mild, non-alcoholic detergents or glass cleaner.

- Recommend non-abrasive cloths: Microfiber, Cotton T-shirt, Cotton handkerchief, Cotton tea towel

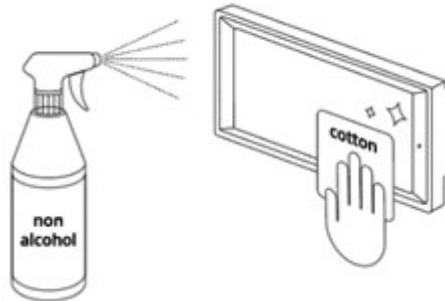

6.3.2. For Wet Tissue Cleaning:

Steps

- (1) Stand or lay down the labels.
- (2) Wipe using wet tissues.
- (3) Let the labels dry.



6.4. Battery Replacement

Audience

- Authorized personnel with the following knowledge are allowed to replace the battery: Battery / Electronic assemblies (e.g. circuit board) / Compliance with the instruction
- ※ Note: Warranty is voided if battery is replaced by unauthorized personnel. (When batteries require replacement, please contact the authorized personnel)

Instructions

- Risk of short circuit if battery is incorrectly installed/stored.
 - Check that hands are dry before and at all times during the replacement Process.
 - Keep batteries away from children and infants.
 - Do not heat, charge, bend, drop, short-circuit and/or disassemble battery.
 - Do not mix together used and new batteries or different battery types.
- ※ Note: Battery rarely has minor stain or leak.

Steps

- (1) Open the battery cover.
- (2) Take out the batteries.
- (3) Put in the new batteries.
- (4) Check the batteries direction.
- (5) Put back in the battery cover.

Battery Direction

- Coin Battery
 - Top: (+) Positive
 - Bottom: (-) Negative

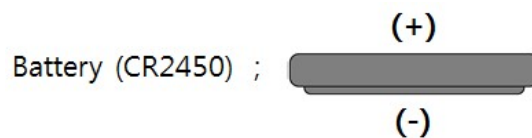


Figure 14. COIN BATTERY DIRECTION

7. Battery Handling Guide

7.1. Avoiding hazards in lithium battery handling

1. Do not short circuit (Fig. 1)


- Direct connection of plus (+) and minus (-) poles may result in leakage, heat generation, explosion and/or fire.
- Do not store and/or carry batteries with metallic items, such as a necklace.

2. Do not stack and/or jumble batteries (Fig. 2)

- Stacked and/or jumbled batteries may cause a short circuit and/or forced discharge from contact with other batteries.
- This may result in leakage, heat generation, explosion and/or fire.

3. Do not make forced discharge batteries (Fig. 3)

- On a forced discharge by an external power source, the battery voltage goes to negative and this causes gas generation in inside of the battery.
- This may result in leakage, heat generation, explosion and/or fire.

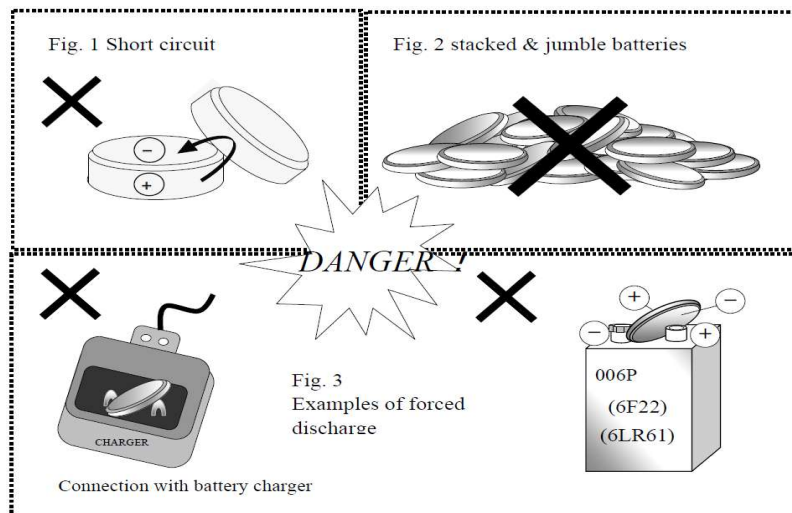

4. Do not dispose of batteries in fire

- Disposal of batteries in fire is extremely dangerous with a risk of explosion and violent flaring.

5. Do not heat batteries

- Heating batteries above 100°C/212°F may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.

6. Do not solder directly onto batteries

- Direct soldering onto batteries may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.

7. Do not recharge batteries

- Recharging of batteries may result in internal gas generation, causing electrolyte leak, battery swelling, fire and explosion.

8. Do not disassemble batteries

- Disassembly of batteries may generate gas that may irritate your throat.
- Lithium may also react with moisture to generate heat and fire.

9. Do not deform batteries

- Applying extreme pressure to batteries may cause deformation of the crimping and internal short circuit, causing electrolyte leak, battery swelling, fire and explosion.

10. Do not mix different type batteries

- For some applications, mixing different types of batteries or new and old batteries, can cause an over discharge due to differences in voltage and discharge capacities.
- This may lead to the risk of swelling and/or explosion.





11. Do not insert batteries with opposite polarity

- For some applications, battery insertion with opposite polarity (reverse insertion of plus and minus) may result in leakage, heat generation, explosion and/or fire.

※ Please ensure the above precautions are strictly observed by related divisions including Production, warehouse, Product technology, sales, quality, customer stores, S/I companies, part-time workers, and external service companies.


7.2. Proper Storing and Disposing of Lithium Batteries

- To minimize risk of fire and explosion of batteries, be sure to follow the instructions below.

	Do not stack batteries	Do not stack batteries in a vinyl bags	Do not Short circuit	Do not make forced discharge batteries	
NG					
OK	Using battery tray → Tape sealing	Tape attachment to "+/- electrodes			
					

- Proper use of battery tray is outlined below.

With batteries properly placed into each tray slot → stack the trays in the same orientation → use an empty tray on the top stack → tape the stack together to avoid falling apart.

	Use the battery tray	Stack on the tray	Seal the tray with tape
OK			
OK			

- Follow local regulations for proper battery disposal guideline.