


ARM NEXT

WIRELESS HEARING PROTECTOR

NRR
29dB

 Bluetooth

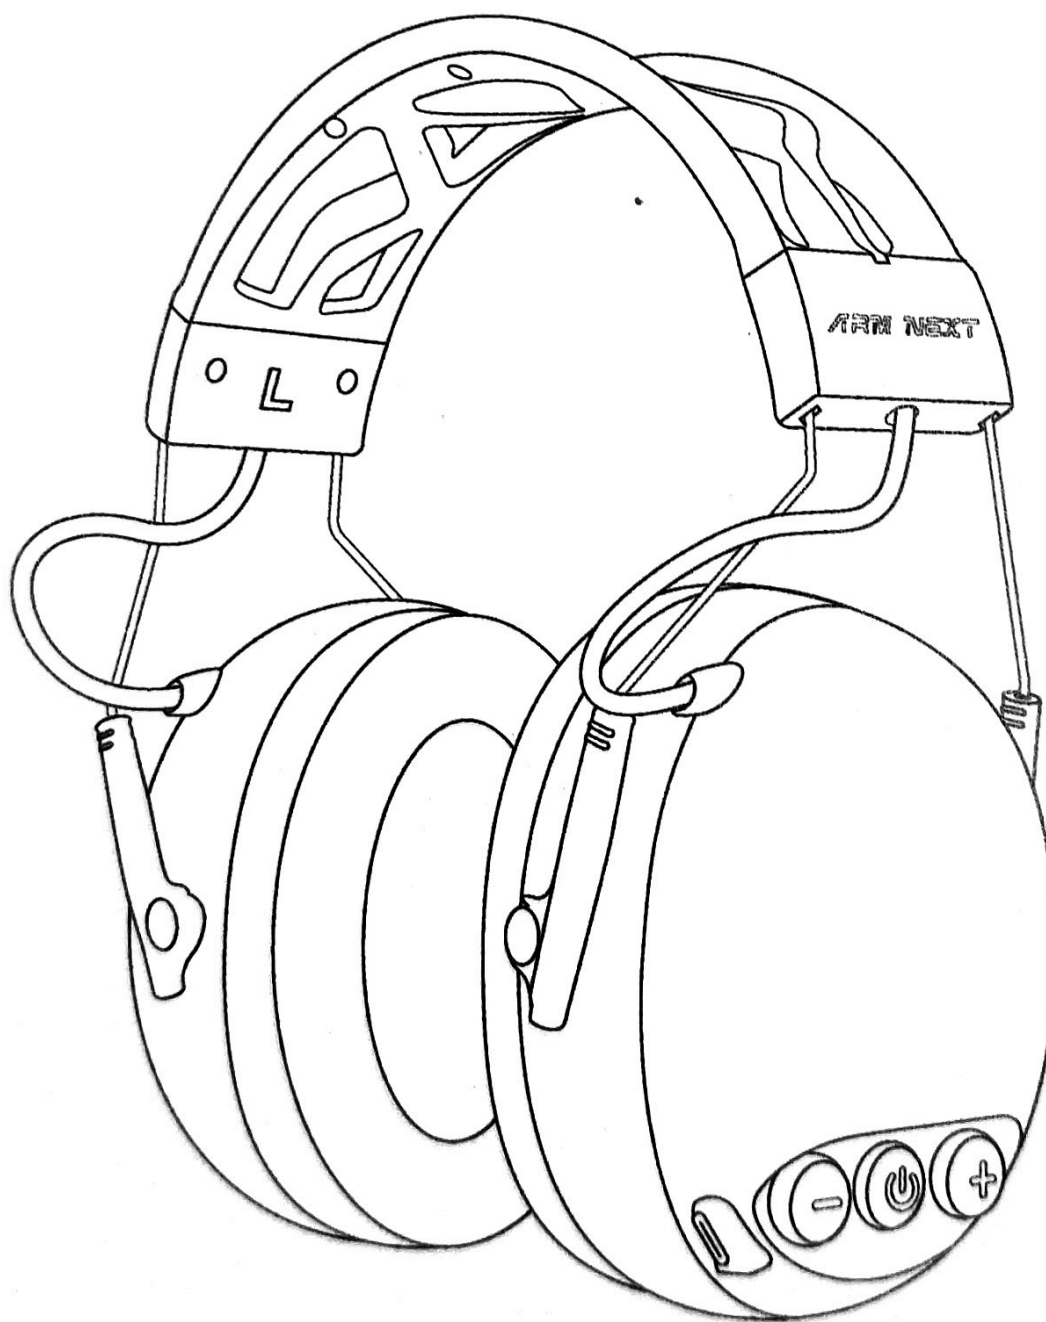


MODEL: BT2
USER MANUAL

Safety information

Please read, understand, and follow all safety information in these instructions prior to using the product. Retain these instructions for future reference.


Product Overview

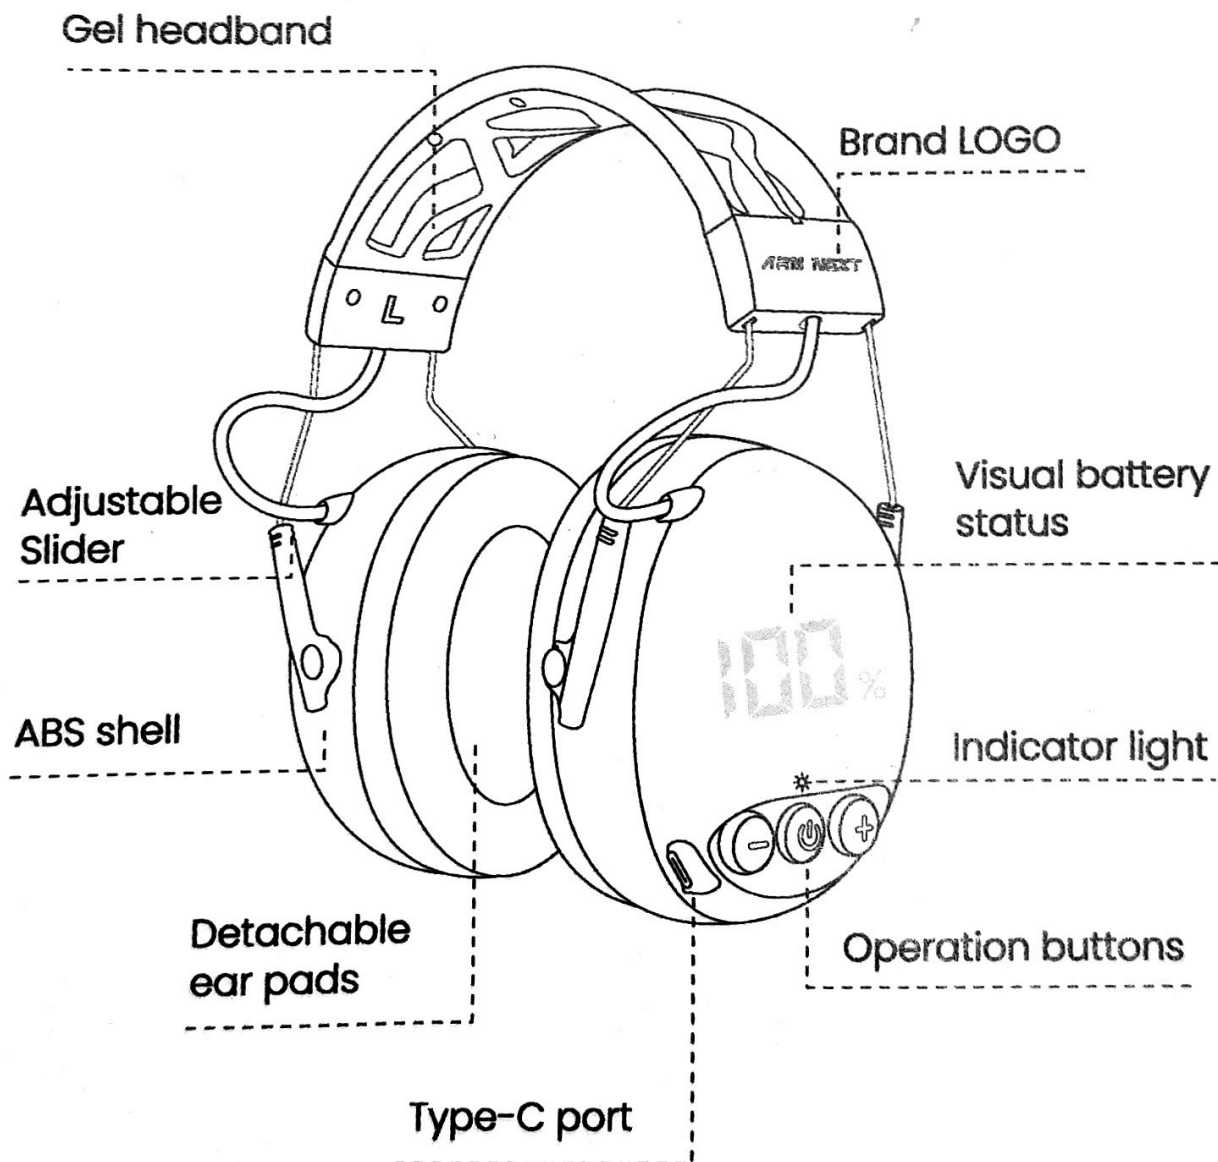

Product BT2 is a multifunctional noise-canceling headset which provides the visual battery status and additional customized operation based on BT1.

Operation instructions

Power ON/OFF

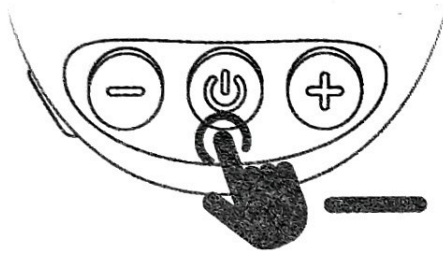



POWER ON

Press and hold the power button for 2 seconds

POWER OFF

Press and hold the power button for 2 seconds

Bluetooth connection

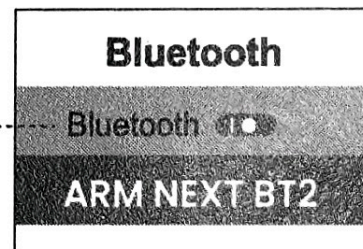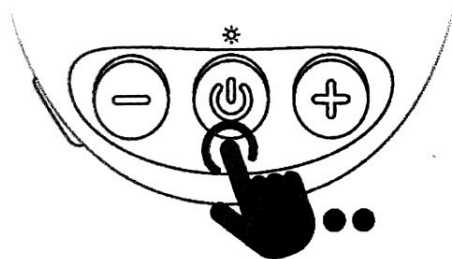

1. Double-click to activate the voice assistant
2. Press 8 times in a row to cancel the current paired headphones and re-enter the pairing mode.

After turning on, it will enter the pairing mode, with the indicator light flashing alternately in red and blue.

The identification on the device will be displayed as "ARMNEXT BT2". After a successful Bluetooth connection, you will hear a "Connected".


The device will automatically reconnect to the last used device.

Bluetooth Range

The typical range between a Bluetooth device and the hearing protector is approximately 25 feet. This distance may vary depend on the device. As the distance increased, the risk of signal dropouts will also increase. For best result, keep your Bluetooth device on your body or within arm's length of the hearing protector while using Bluetooth mode.

Music & phone calls operation

1. Click to reduce the volume.
2. Double-click for the "previous".
3. Long press to continuously reduce the volume.

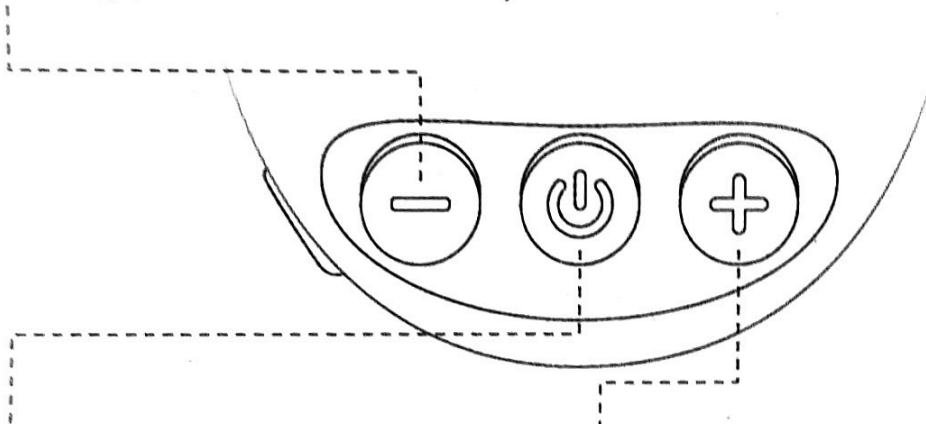


When the phone calls :

1. Click to answer.
2. Double-click to reject.

1. Click to increase the volume.
2. Double-click for the "next".
3. Long press to continuously increase the volume.


When answering a call in Bluetooth mode, the music will be muted until the call ends.

Charging and AUX input

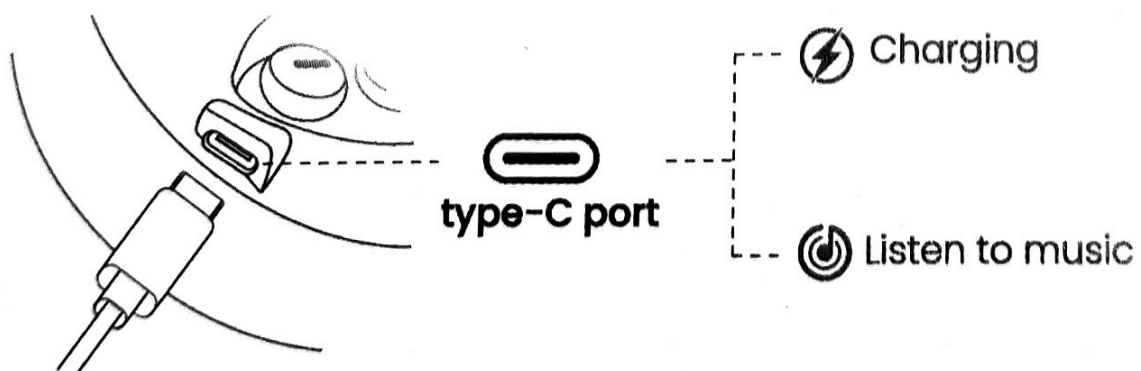

The 2-in-1 Type-C port integrates power charging and AUX input, making it more convenient and faster.

Charging instructions

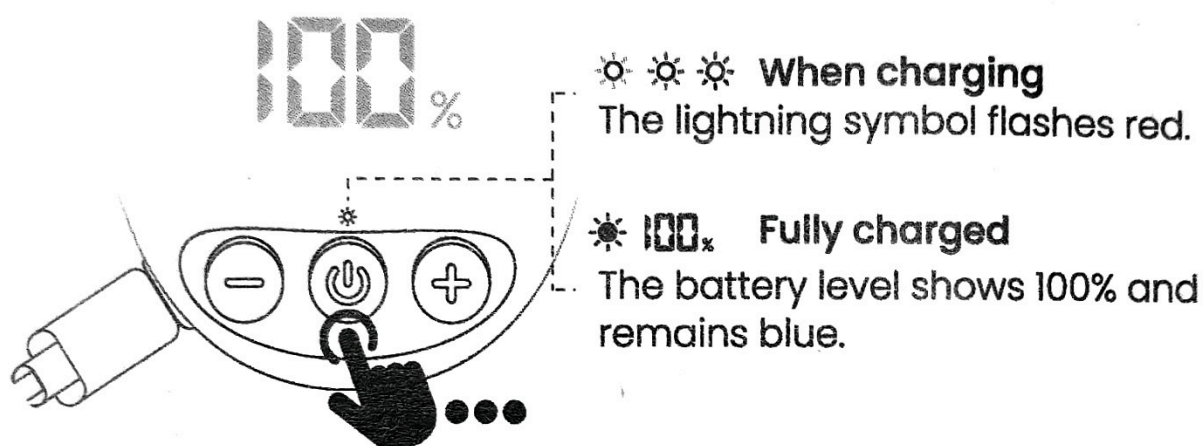

Press the power button three times in a row and the battery status will flash twice.

When charging, the lightning indicator flashes, and the full battery display shows 100% and remains constantly lit

Low battery warning

Hearing Protector will also provide a "battery low" warning every 30 minutes when battery voltage is low. And the led will blink red at this time. The hearing protector will auto shut down when battery is dry.

Product Specification

MODEL	BT2
Version	Bluetooth 5.4
Input	5V / 1A
Battery	1200 mAh
Working Time	60 hours
Charging Port	Type-C

Transport information

The product is suitable for transport in original packaging

Important user information

Recommendation that the user should ensure that:

1. The ear cups are fitted, adjusted and maintained in accordance with the manufacturer's instructions;
2. The ear cups are worn at all times in noisy surroundings;
3. The ear cups are regularly inspected for serviceability;

Note: if the recommendations given are not adhered to, the protection afforded by the Ear cups will be severely impaired;

Congratulations and thanks for your choosing ARM NEXT Hearing Protectors designed to protect users from harmful noise.



FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.