


Buttons

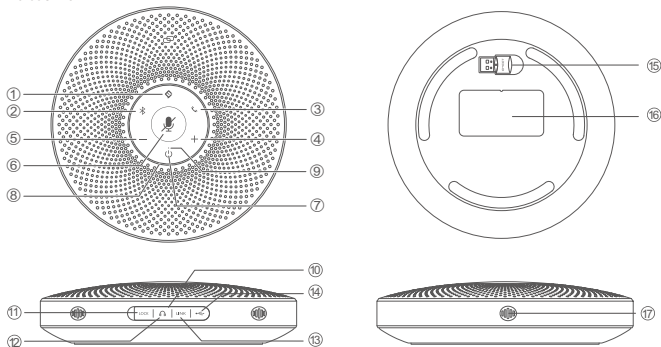

Overview

- | | | |
|--------------------------------|-----------------------|-------------------------|
| ① VoiceIA button | ⑦ Power button | ⑬ LINK Daisy Chain port |
| ② Bluetooth button | ⑧ Status LED | ⑭ USB port (Type C) |
| ③ Answer/End Phone Call button | ⑨ Source LED | ⑮ Dongle |
| ④ Volume+ button | ⑩ Rubber plug | ⑯ Nameplate |
| ⑤ Volume- button | ⑪ LOCK port | ⑰ MIC hole |
| ⑥ Mute button | ⑫ Headset output port | |


Power On/Off



Power on/off

Press and hold

Check battery level



Press the power button
when powered on.



25%



50%




75%




100%

The Status LED turns green
to indicate the battery level.

Low battery warning



In power-on state




The Status LED turns red
to indicate low battery.

VoiceIA Button


Short press "  " AI Noise Reduction button to enable/disable AI noise function.

Turning on VoiceIA® noise reduction can greatly reduce some noises in the meeting scene, such as from keyboard tapping, air conditioning noise, and general unwanted background noise.




Press

Turn on/off VoiceIA intelligent noise reduction.



VoiceIA® OFF



VoiceIA® ON

Note : After the noise reduction mode is enabled, in order to maintain good sound pickup effect, please make a call within a sound pickup range of 1.5 m(4.9ft).

MIC Mute Button




Press
mute/unmute MIC



When the MIC is muted, the
Status LED turns red

Answer/End Phone Call Button



Status	Action	Status
Incoming call	Press 	Answer a call
Incoming call	Press and hold 	Reject a call
Call going	Press/press and hold 	End a call

Volume +/Volume - Button



Action	Status	LED
Press 	Volume up	Status LED turns blue
Press 	Volume down	Status LED turns blue

Bluetooth Connection




Action	Status	Source LED	LED
Press and hold  Enter Bluetooth pairing mode	Bluetooth paired	Steady blue	
	Bluetooth not paired	Flashes blue	
Press 	Bluetooth closed/reconnected	Steady white	

Notes:

- a) When turning on the device, it will reconnect to the last computer/mobile phone via Bluetooth whilst it is active.
- b) Bluetooth closed means it can not be found.

USB Connection

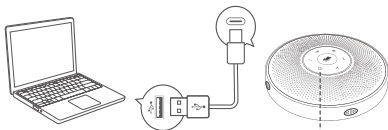

Connect to your computer by using a USB cable.




The Source LED turns green when USB cable is connected.

USB Dongle Connection




Connect to your computer by using a USB Dongle.



The Source LED turns blue when USB Dongle is connected.

Dongle status	Dongle LED	LED
Pairing	Flashes blue	
Pairing successful	Steady blue	
Call going	Green	
Microphone muted	Steady red	

Headset Connection





When the headset is connected, the Source LED turns yellow.


Connect to the headset jack using a 3.5mm headset cable.

Note: When the headset is connected, the speaker is automatically muted.

Daisy Chain Cable

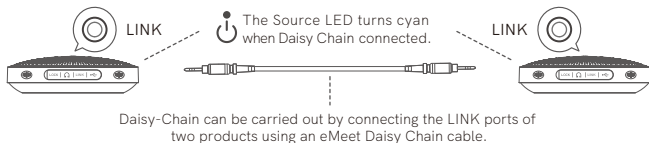


Daisy-Chain Before 8 people



Daisy-Chain After 16 people


Note: eMeet Daisy Chain cables must be purchased separately.

Lock Port Setting



Note: The LOCK port is of a Kensington type which requires the user to buy a lock otherwise.

Charging



Action	Source LED	LED
Charging in power-off state	Yellow-green LED indicator flashing	
Fully charged in power-off state	Yellow-green LED indicator always on	

Download Application

Download the eMeet Link PC desktop app for software updates.



Product Parameters

Charging input	5V/1A
Rated power	5W
MIC diameter	Φ10mm
SPK frequency range	20Hz-20KHz
Bluetooth version	V5.0
Bluetooth range	20m (in an open environment)

Note: In case of any change in the specifications, official website information shall prevail.