


Hammacher Schlemmer

Offering the best, the only and the Unexpected Since
1848

The Cordless LED Table Lamp

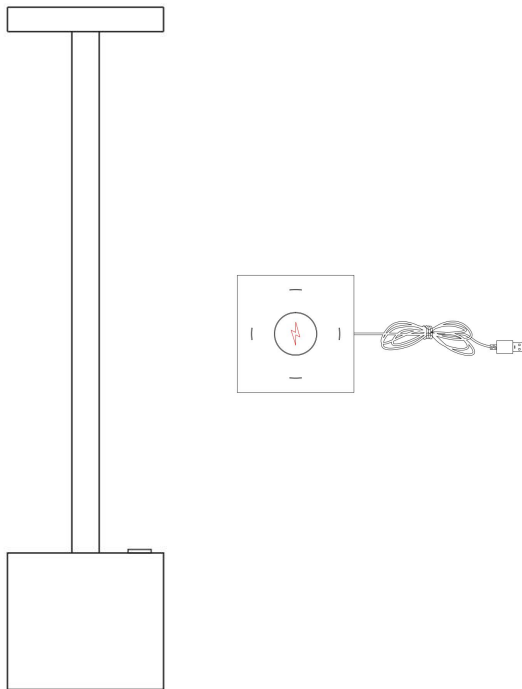

USER GUIDE & OPERATING MANUAL

INCLUDE IMPORTANT SAFETY INFORMATION
READ ALL INSTRUCTIONS BEFORE USING DEVICE

SAVE THESE INSTRUCTIONS

Product Information:

- Name: The Cordless LED Table Lamp
- Battery capacity: 2000mAh
- Rated Power: 6W
- Power Input: DC 5V _ 1A
- Quantity of LEDs: 12 PCS Warm White LEDs
- Charging duration: About 4h
- Available Time: 15~14h (full charged)
- Product Size: 3.15*3.15*13.78"
- Material: Aluminum + PMMA
- Switch: touch switch / stepless dimming

Contents in the package:

- Lamp x 1
- Manual x 1
- Adapter x 1
- USB cable x 1
- 1 port charging station

Attention:

- Small parts are included. Children under 5 years of age should use under adult supervision.
- When the light becomes dim, please charge it

instead of using so as to protect the battery. If this lamp is not used for a long time, please charge it at least once every month to prolong the battery life.

- Do not overcharge to battery. Please pull the power plug if nobody is around for a long time.
- Do not disassemble this product. Due to the different power supply standards on the market, some power supplies may not be compatible with this product. Use a certified USB adapter for charging (output 5V = 1A).
- Please do not use it under wet and extreme high temperature circumstance.

Storage:

- Please store it at normal temperature and pressure.
- Built-in battery, please keep away from fire.

Product Features:

- Great for dinner, no string required.
- Touch control: short press switch to turn on/off the lamp and switch different light modes, long press switch to adjust the lamp from dark to bright or from bright to dark. Turn the lamp on again, it will record the brightness of the light adjusted during the last use.
- 360 degree lamp design can provide a large area of light
- The lamp adopts 12pcs reading-standard energy-saving, high-brightness, long life LED lamp beads, no glare and no stroboscopic lights, soft lighting and eye protection.

- Connect the other end of the USB cable to the power bank, computer or adapter for charging.
- The lamp with overload charging protector, it will stop charging automatic when full charged.
- Built-in a 2000mAh lithium battery. It usually takes about 5 hours to reach a full charge, and then can last 15S~20h illumination . Over charging may cause damage to the battery.

FCC Caution:

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

During the operation of device a distance of 15 cm surrounding the device and 20 cm above the top surface of the device must be respected.