

Log lifter Assembly

OPEN BOX AND START LAYING OUT ALL COMPONENTS.



A LOG LIFT



B HYDRAULIC HOSES




C LEG SECTION



D STEEL ROLLER

1

Fasten **A** to **C** with bolts and nuts at four locations.

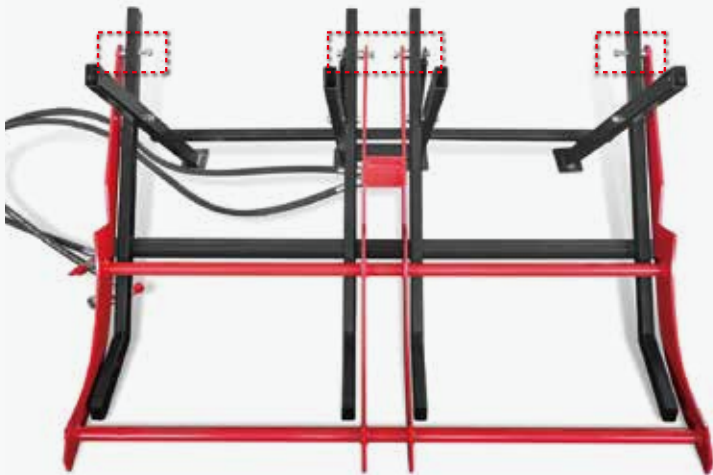

2

Connect both ends of **B** to the positions shown in the figure.



3

Install **D** onto the frame using bolts. The eight bolt fastening locations are shown in the figure.



4

Refer to the figure below for the hydraulic hose connection method. Connect the hydraulic motor hoses (red) to the two ports on the left, and connect the hydraulic cylinder hoses (blue) to the two ports on the right.

