

SAMCOM

User Manual

Bluetooth Speaker Microphone for Walkie Talkie



Model: RMSP07

Tech Support Service

Please contact us immediately if you need any tech support service and have any after-sale problems. We will give feedback to you within 24 hours.



Technical Support



www.samcom-radios.com

Please contact with SAMCOM team

 **FB page: SAMCOM Radios**
 **Instagram: SAMCOM Radios**
 **sanconsales@outlook.com**
 **sanconmarketing2@outlook.com**

Product Specification

Item: Bluetooth Speaker Mic
Model: RMSP07
Battery Type: Lithium Polymer Battery
Battery Capacity: 1000mAh 3.7V
(3.7Wh) Battery Life: About 10 hours
Charging time: About 2 hours
Charging input: 5.00V
FCC ID:2BPIZ-RMSP07

Item: Bluetooth Adapter
Model: X7-TX
Battery Type: Lithium Polymer Battery
Battery Capacity: 230mAh 3.7V (851mWh)
Battery Life: About 10 hours
Charging time: About 2 hours
Charging input: 5.00V
FCC ID:2BPIZ-X7-TX

After-Sales Service and Support

Warranty Period

15 months from the date of purchase of the product.

The following conditions are not warranted

1. Damage caused by self-disassembly;
2. Failure caused by falling and man-made mechanical damage;
3. Failure or damage caused by force majeure;
4. Contact with liquid, water, rain, extreme humidity or heavy perspiration, sand, dirt or like extreme heat, or food.

Please read this manual carefully before using the product and keep it properly.

The illustrations of products, accessories and other products in the manual are schematic diagrams and are for reference only. Due to the update and upgrade of the product, the actual product and the schematic diagram may be slightly different, please refer to the actual product.

Package Contents



Bluetooth Speaker Mic



Bluetooth Adapter




Charging Cable

Products

Products - Bluetooth Speaker Mic

- ① PTT button
- ② Microphone
- ③ Indicator LED
- ④ Speaker
- ⑤ Volume -
- ⑥ Power button
- ⑦ Volume +
- ⑧ Headphone jack/Charging jack
- ⑨ Back clip

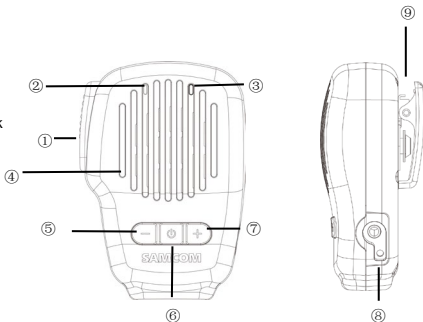

Products


2 Pin K Head Plug



① Type-C Charging Port



② Indicator Light
③ Power Button




④ 2-pin Plug

Products

2 Pin K Head Plug

SAMCOM X7-TX Two-Pin Standard Connector Diameter 2.5mm and 3.5mm, Space of two pin 11mm, Please confirm the interface type of your walkie talkies.

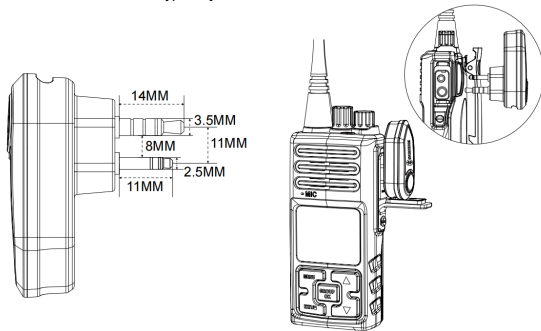


Battery and Charging

●Battery Notification

- 1) Bluetooth Speaker Mic : When the battery capacity less than 20%, the red indicator will flash and a voice announce "Low Battery."
- 2) Bluetooth Adapter: When the battery capacity less than 20%, the red indicator will flash to indicate low battery.

●Charging Indicator

- 1) Bluetooth Speaker Mic : Red light on while charging; when red light turns green, it means the charging of Bluetooth Speaker Mic is finished.
- 2) Bluetooth Adapter: Red light on while charging; when red light turn to green light means the charging of Bluetooth Adapter is finished.



Bluetooth Speaker Mic Charging Cable



Bluetooth Adapter Charging Cable

Button Operations and Functions

•Bluetooth Speaker Mic – Button Operations

Button	Operation	Function	Indicator light
PTT Button	Connected to Bluetooth Adapter – Long Press	Activate PTT Transmission	Red Light Steady
Power Button	Long Press	/Power Off	Red and green lights flashing/All Lights Off
	After successfully connecting your phone– Short Press	Pause Play Answer Call End Call / Hang Up	Green Light Flashes Once Every 5 Seconds
	Power On Without Connection	Auto Power Off after 300 Seconds	All Lights Off
Volume + Button	Short Press	Increase Volume	---
	Long Press	Next Track	---
Volume – Button	Short Press	Decrease Volume	---
	Long Press	Previous Track	---

Button Operations Functions and Pairing

•Bluetooth Adapter – Button Operations

Button	Operation	Function	Indicator
Power Button	Long press for 3 seconds	Power on	Green light on for about 1 second
	In power on state – short press	Searching / Connecting state	Green light flashes / blinks
	When connected to adapter – short press	Cancel PTT transmission	Red light off
	In power on state – long press for 3 seconds	Power off	Red light on for about 1 second, Then all lights off
	In Unpaired / Disconnected State	Auto power off after 300 seconds	All lights off

Pairing and Connection Method

The bluetooth speaker mic and the bluetooth adapter have been pre-paired at the time of factory shipment. Simply insert the adapter into the radio and power it on to use.

(After pressing and holding the power button to turn on both the bluetooth speaker mic and the bluetooth adapter, the indicator lights will flash green slowly, indicating that pairing has been successfully completed and the devices are ready for use.)

●Pairing Bluetooth Speaker Mic with Mobile Phone

1) Step 1: Long press the bluetooth speaker mic power button for 3 seconds to turn on. The green light will turn on for about 1 second, then the red and green lights will flash, indicating the bluetooth speaker mic is in pairing mode.

2) Step 2: Enable Bluetooth on your phone and select the bluetooth speaker mic from the list of available devices (Bluetooth name for bluetooth speaker mic is RMSP07) . Once successfully connected, the green light will flash slowly.

●Pairing Bluetooth Speaker Mic with Bluetooth Adapter

1) Step 1: Long press the bluetooth speaker mic power button for 3 seconds to turn on. The green light will turn on for about 1 second, then the red and green lights will flash, indicating the bluetooth speaker mic is in pairing mode.

2) Step 2: Long press the bluetooth adapter power button for 3 seconds to turn on. The green light will turn on for about 1 second. The red and green lights will flash, indicating the adapter is in pairing mode.

3) Step 3: Once both the bluetooth speaker mic and adapter are powered on, they will automatically pair. When pairing is successful, the green light will flash slowly.

- **Dual Pairing Mode for Bluetooth Adapter with Radio and Mobile Phone at the same time**

1) Step 1: Long press the bluetooth speaker mic power button for 3 seconds to turn it on. The green light will turn on for about 1 second, then the red and green lights will flash, indicating the bluetooth speaker mic is in pairing mode.

2) Step 2: Enable Bluetooth on your phone and pair it with the bluetooth speaker mic. Once connected, the green light will flash slowly.

3) Step 3: Long press the bluetooth adapter power button for 3 seconds to turn on. The green light will turn on for about 1 second. Once both the bluetooth speaker mic and adapter are powered on, they will automatically pair.

When pairing is successful, the green light will flash slowly.

Safety Warning

Warning

1. Do not disassemble, repair or modify device for any reason, as this may cause a fire to completely damage the product.
2. Do not expose the device to an environment where the temperature is too low or too high (below 0°C or above 45°C);
3. Do not use the device during thunderstorms, which can cause abnormalities in the device and increase the risk of electric shock;
4. Do not puncture or scratch the product with hard objects
5. Do not wipe this product with corrosive liquid and store the product in an environment containing corrosive substances. Avoid contact with liquids
6. This product contains small accessories, please place it out of the reach of children to avoid the risk of suffocation caused by swallowing.

Attention

1. If the product has not been used for more than two weeks, it is recommended to charge the product before use;
2. Must choose a charger produced by a regular manufacturer and certified by FCC;

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Exposure Warning Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment can be used in portable exposure conditions.