


# XHDATA — D-902 —

## USER MANUAL

### SOLAR WIRELESS MUSIC RADIO

#### AM/FM/SW 3 BAND RADIO

#### WITH USB/TF MP3 PLAYER

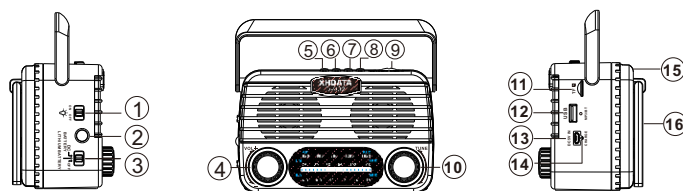

#### Function button description

- |                         |                            |
|-------------------------|----------------------------|
| 1. Light switch         | 9. Function/Band Switch    |
| 2. LED lighting         | 10. Radio tuning button    |
| 3. Power Switch         | 11. TF Card Socket         |
| 4. Volume button        | 12. USB Socket             |
| 5. "M" Mode switch      | 13. DC 5V Input socket     |
| 6. "◀" Previous key     | 14. Charging LED indicator |
| 7. "▶" Play / pause key | 15. Antenna                |
| 8. "▶▶" Next key        | 16. Solar Panel: 1W        |

#### Power selection operation

- Push the power switch to lithium or DC 3V (UM1x2)

#### Radio Function Operation

- Push the power switch ③ to the lithium battery position
- Push Function/band switch ⑨ to select band: AM / FM / SW 1-2
- When listening to FM or SW band, please pull out the rod antenna and adjust it to the best receiving angle ⑮
- When listening to AM band, please rotate the body to adjust to the best receiving angle
- Turn the tuning button ⑩ slowly to select the radio station

#### USB / TF MP3 Playing Function

- Push the power switch ③ to the lithium battery position
- Push Function/band switch ⑨ to :MP3 /BT
- Turn the volume knob to the appropriate volume ⑩
- Insert the USB or TF card into the corresponding socket ⑪ ⑫
- Short press the previous ⑥ or next ⑧ button to select the previous or next song. Long press these two buttons for fast reverse or fast forward function (Forward and backward only TF and USB)
- Short press "▶▶" ⑦ to pause. Press again to resume playback
- Long press ⑤ is bluetooth, short press in order to play bluetooth /USB/TF

#### Wireless music play function

- Push Function/band switch ⑨ to :MP3 /BT
- Turn the volume knob to the appropriate volume ⑩
- Push the power switch ③ to the lithium battery position
- When the USB or TF card is not plugged in, the machine will play Bluetooth by default
- Turn on the bluetooth connection of mobile phone :(D-902)
- Short press the previous ⑥ or next ⑧ button to select the previous or next song.
- Long press the "play" key ⑦ for 3 seconds to forcibly disconnect the currently connected device, and then press it again to restore the connection

#### Charging Function Operation

- Plug the charging cable into the "DC 5V in" charging port ⑬ and the other end into the 5V USB output port of the mobile phone adapter
- When the battery is fully charged, the LED is off

#### LED Lighting Operation

- Push the light switch ① to "ON" position
- When using dry battery DC3v power supply, the flashlight cannot be lit because the voltage is no more than 3.3V

#### SPECIFICATIONS

FM: 87-108 MHz DC IN : 5V ≥ 500mA  
AM: 522-1620 MHz DC : 3V(UM1X2)  
SW: 6-18 MHz DC : 3.7V (18650)  
Solar panel: 1W

Skype: radiowow  
E-mail: radiowow@163.com  
Facebook: XHDATA  
<https://www.xhdata.com.cn/>  
Whatsapp: +86 1802519 3267

FC CE RoHS MADE IN CHINA