


wireless RGB gaming mouse

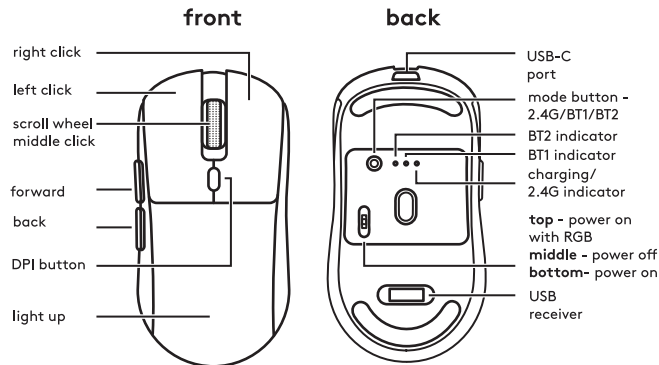

included

- Wireless RGB gaming mouse
- USB-A 2.4Ghz receiver
- USB-A to USB-C charging cable

product requirements

- Compatible devices

indicators

- Flashing red rapidly - low power
- Flashing red slowly - 2.4Ghz mode
- Flashing green - BT1 mode
- Flashing blue - BT2 mode
- Solid red - charging
- Red light off - charging complete

charging the mouse

- A full charge requires approximately 4.5 hours and can provide up to 50 hours of use when fully charged.
- Plug the USB-C end of the charging cable into the mouse and plug the opposite end into a USB-A power supply of at least DC 5V 240mA.

WARNING: Please use a UL compliant power supply.

- The LED indicator will stay solid red while the mouse is charging. It will turn off when charging is complete.

Note: You can use the mouse while charging.

connection method

2.4Ghz wireless connection mode:

- Fully charge the mouse with the provided USB cable before use.
- Press the mode button to switch to 2.4G, Plug the receiver into your device, the red indicator light will flash slowly.
- The mouse and receiver will pair automatically. The indicator light will fade once pairing succeeds.

Bluetooth connection mode:

- Press the mode button to switch to BT1 or BT2, then hold it for 3 seconds, the green/blue indicator light will flash rapidly.

front

Note: Supports pairing with two devices at the same time with BT1 and BT2.

- Use the Bluetooth settings on your device to pair with "KPOP x Heyday Mouse". The indicator will fade when pairing is successful.

Note: When the mouse is powered on it will automatically re-pair in the previously used settings.

wired connection mode:

- Using the included cable, plug the USB-C end into the mouse and the USB-A end into your computer.
- The mouse will connect to your computer automatically.

function

- Mouse sensitivity can be quickly adjusted by pressing the DPI button, cycling through 800 > 1600 > 3200 > 4800 > 6400 > 12000 levels. A higher DPI value results in faster cursor movement.

The corresponding indicator light for your current mode (red for 2.4G/green for BT1/blue for BT2) will flash to confirm the setting: 800 DPI - solid red, 1600 DPI - dark green, 3200 DPI - dark blue, 4800 DPI - light cyan, 6400 DPI - purplish, 12000 DPI - light blue.

- Press the scroll wheel button together with the forward button to switch 13 lighting effects. Press the scroll wheel button and the back button to turn the light on or off.
- Hold left + right buttons together for 3 seconds to switch polling rate.
- LED indicators: 125 Hz - red, 250 Hz - green, 500 Hz - blue, 1000 Hz - purple.
- The mouse enters light sleep after 60 seconds of inactivity. It can be woken up by movement within 10 minutes. After 10 minutes, it enters deep sleep and can only be woken up by pressing any mouse button.

troubleshooting

- If the mouse is not connecting, make sure the receiver is properly plugged into the computer or make sure wireless pairing is enabled on your device and that it has successfully paired.
- If the mouse is not responding, check if your battery is low. If it is recharge the mouse.
- If the connection keeps dropping, move closer to the device or reduce interference from other wireless devices.
- Having trouble with your device? Be sure you're running the latest software on your devices. You can do this by doing a software update in the settings of your device.
- If the mouse malfunctions, press and hold the left button, right button and scroll wheel for 3 seconds to perform a reset.

need some help?

Can't get it to pair? Just have a question?



call us at: 1-833-TGT-Tech or: 1-833-848-8324

safety

- Do not use near any water source.
- Do not modify or repair this device.
- Do not use chemical detergents to clean your device, use a soft dry cloth.

heyday

Wireless Mouse Model: BEM01 FCC ID: 2A023-BEM01; Receiver Model: BEMS01R FCC ID: 2A023-BEMS01R Working distance: 8-10m Input 5V=240mA Made in Vietnam
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

WARNINGS: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

Target Corp. Mpls. MN, 55403 Phone: 612-304-6073

For qualified repair specialists requesting repair information and parts please contact the original manufacturer at customersupport@gemsfindyours.com

back