


Flashlight intercom

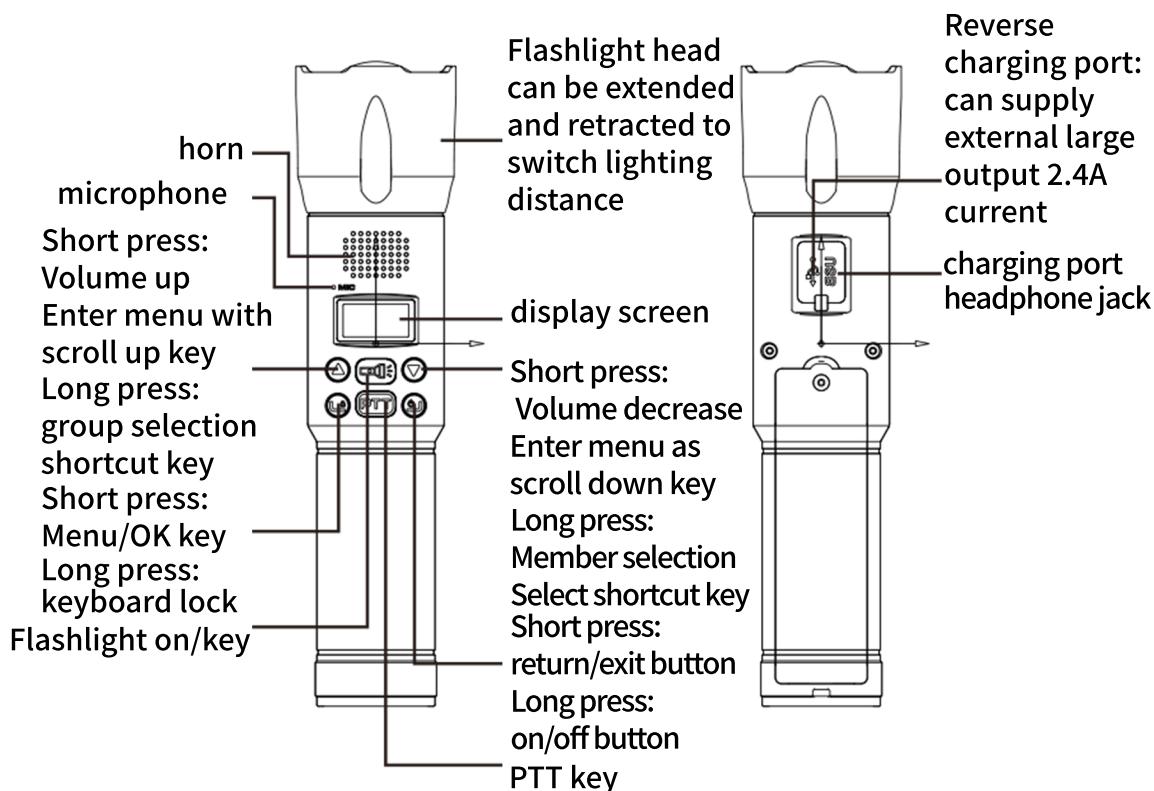

►► Basic operation:

Power on/off: Press and hold the keyboard  for 3 seconds to automatically turn on the device. During the power on process, the startup interface will be displayed. If successfully logged in, the device will directly enter the standby interface. Press and hold the keyboard  again for 3 seconds to automatically turn off the device.

•Volume adjustment: When logging into the main interface, short press the key  to increase the volume, and short press  to decrease the volume.

•Flashlight: Press the  key briefly to turn on the lighting. At this time, manually pull the flashlight head to adjust the lighting distance. Press this key again briefly to turn off.

•Charging: Insert the TYPE-C port into the back of the device. During the charging process, the green light will flash, and the green light will remain on when fully charged. After unplugging the charging cable, the blue light will remain on for about 30 seconds and automatically turn off.

•Reverse charging function: Insert the USB port of the charging cable into the back  of the machine, and insert the other end into another device to perform automatic charging. During the reverse charging process, if the blue light is constantly on, it indicates that the machine has sufficient battery, and if the blue light flashes, it indicates that the battery is low. After unplugging the charging cable, the blue light will remain on for about 30 seconds and automatically turn off.

FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Statement

SAR tests are conducted using standard operating positions according standards with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value.

This model product has been tested and meets the RF exposure guidelines with the test distance 25mm for face and 0mm for body worn. The highest SAR_{1g} value is 0.283 W/Kg for face and 0.707 W/Kg for body worn. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with RF exposure requirements, and should be avoided