




F Electric roller blind draft (If the accessory with "*" that mean could be OEM)




T Transmitter operating instructions

The diagram illustrates the three-step pairing process:

- 1. Select the channel that will be paired:** A vertical remote control is shown with the 'Select' button highlighted.
- 2. Press [Set] button on motor:** A circular motor unit is shown with the 'Set' button being pressed.
- 3. Within 10s after motor stops, press [Code] button:** The remote control is shown with the 'Code' button highlighted. A text box above it says 'Motor response: rotate back and forth once.' and a text box below it says 'code'.

A final arrow points to a thumbs-up icon, indicating successful pairing.

Clear pairing : Clear all pairing on the motor:

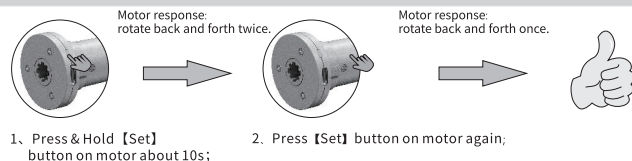

Inching / Continuous moving interchange: Default is continuous moving. After switching to inching moving, press & hold **[Up]** or **[Down]** button about 2s, motor will continuously moves;

1. Select the channel that will be interchanged;

2. Press & Hold **[Set]** button on transmitter about 10s;


Motor response: rotate back and forth once.

3. Within 10s after motor stops, press **[Up]** button about 5s;

Motor response: rotate back and forth once.


The diagram illustrates the sequence of operations for a motor response. It shows a 'Select' input being used to choose between two paths, A and B. Path A involves a transmitter and a code input, leading to a motor response: 'rotate back and forth once.' Path B involves a transmitter and a code input, leading to a motor response: 'rotate back and forth once.' A thumbs-up icon indicates the final successful outcome.

Reset direction : Reset motor direction. Such as: before reset, press transmitter up button, blinds run down. After reset, press transmitter up button, blinds run up.

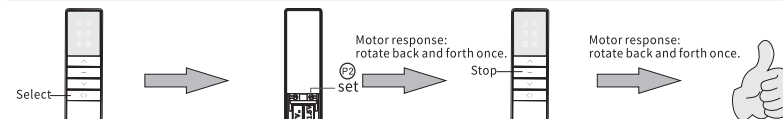


1. Select the channel that will be reset direction;
2. Press & Hold [Set] button on transmitter about 10s;
3. Within 10s after motor stops, press [Stop] button about 5s;

Adjusting Limits: When you press **[Up]** or **[Down]** button, the blinds will move up or down and stop automatically at the appointed position.

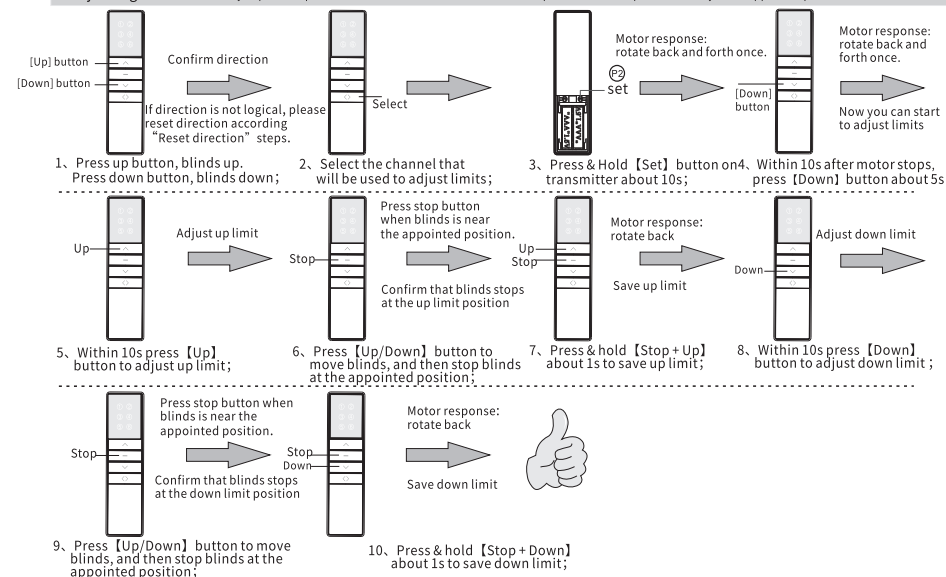

Adjust the third limit : Repeat the operation once to eliminate the third limit:

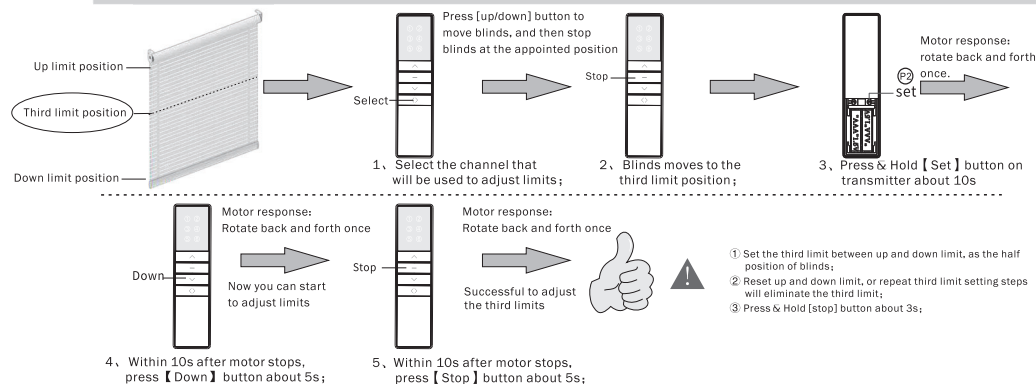

Tubular Motor:

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Remote control:

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.