


**20V MAX\* CORDLESS LEAF BLOWER**

**SEYVUM**

**INSTRUCTION MANUAL**

**MODEL: DCBL2006**

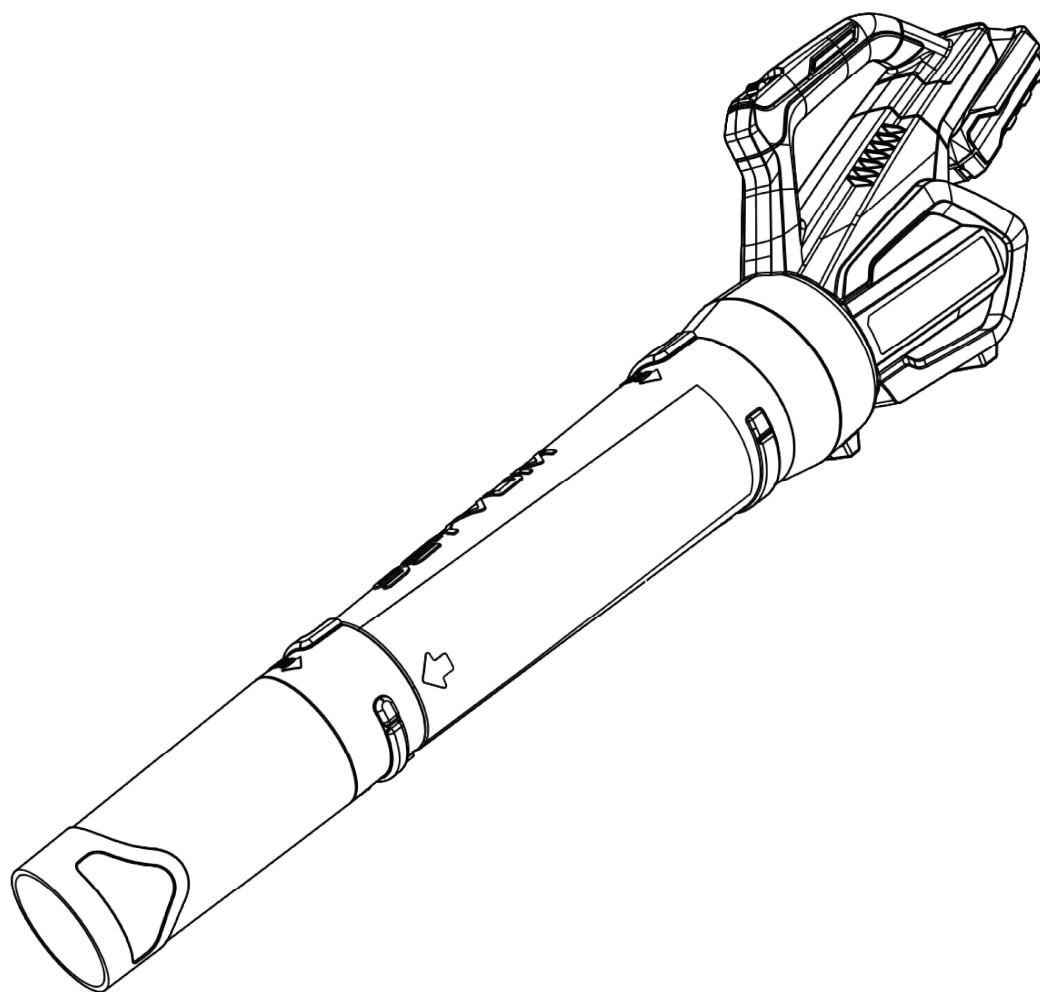

**SEYVUM E6 LEAF BLOWER**

**Website: [www.seyvumtools.com](http://www.seyvumtools.com)**

**Email: [support@seyvumtools.com](mailto:support@seyvumtools.com)**

**SAVE THIS MANUAL FOR FUTURE REFERENCE.**

\*Maximum initial battery pack voltage (measured without a workload) is 20Volts. Measured under a workload, nominal voltage is 18.

## SAFETY GUIDELINES - DEFINITIONS

The information it contains relates to protecting your safety and preventing problems.  
**The symbols below are used to help you recognize this information.**

**⚠ DANGER:** Indicates an imminently hazardous situation that, if not avoided, will result in death or serious injury.

**⚠ WARNING:** Indicates a potentially hazardous situation that, if not avoided, could result in death or serious injury.

**⚠ CAUTION:** Indicates a potentially hazardous situation that, if not avoided, may result in minor or moderate injury.

**⚠ NOTICE:** Used without the safety alert symbol indicates a potentially hazardous situation that, if not avoided, may result in property damage.

## SAVE THESE INSTRUCTIONS SYMBOLS

The label on your tool may include the following symbols. The symbols and their definitions are as follows:

V..... volts

A.....amperes

Hz.....hertz

min.....minutes

~or AC.....alternating current

or DC.....direct current

⚠..... safety alert symbol

.../min or rpm....revolutions or reciprocation per minute

## IMPORTANT SAFETY WARNINGS & INSTRUCTIONS

### **WARNING:** TO REDUCE RISK OF INJURY:

- Before any use, be sure everyone using this unit reads and understands all safety instructions and other information contained in this manual.
- Save these instructions and review frequently prior to use and instructing others.
- Do not point unit discharge at self or bystanders.
- Keep long hair and loose clothing away from openings and moving parts.

 **WARNING:** When using an electric tool, basic safety precautions should always be followed to reduce risk of fire, electric shock, and personal injury.

 **WARNING:** Some dust created by this product maybe contain chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- compounds in fertilizers
  - compounds in insecticides
  - herbicides and pesticides
  - arsenic and chromium from chemically treated lumber.
- To reduce your exposure to these chemicals, wear approved safety equipment such as dust masks that are specially designed to filter out microscopic particles.

**READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE.**

## GENERAL SAFETY WARNINGS AND INSTRUCTIONS FOR ALL TOOLS

- **Read** and follow all instructions.
- **A BATTERY OPERATED UNIT** with integral batteries or a separate battery pack must be recharged only with the specified charger for the battery. A charger that may be suitable for one type of battery may create a risk of fire when used with another battery.
- **USE BATTERY OPERATED UNIT ONLY** with specifically designated battery pack. Use of any other batteries may create a risk of fire .
- **AVOID** accidental starting. Be sure switch is in the locked or off position before inserting battery pack . Carrying units with your finger on the switch or inserting the battery pack into a unit with the switch on invites accidents.
- **DO NOT** use unit if switch does not turn it on or off. A unit that cannot be controlled with the switch is dangerous and must be repaired.
- **DISCONNECT** battery pack from unit or place the switch in the locked or off position before making any adjustments, changing accessories, or storing the unit. Such preventative safety measures reduce the risk of starting the unit accidentally.
- **STORE IDLE UNITS.** When not in use, the unit should be stored in a dry, high or locked-up place, out of reach of children.
- **DON'T OVERREACH.** Keep proper footing and balance at all times.
- **MAINTAIN UNIT WITH CARE.** Keep unit clean for best and safest performance.- Follow instructions for proper maintenance.
- **DO NOT** attempt to repair the blower. To assure product safety and reliability, repairs, maintenance, and adjustments should be performed by pro workers
- **DO NOT** operate blower in a gaseous or explosive atmosphere. Motors in these units normally spark, and the sparks might ignite fumes.
- **AVOID DANGEROUS ENVIRONMENTAL CONDITIONS** – Do not use electric units in damp or wet locations. Don't use the unit in the rain.



- **STAY ALERT** -Watch what you are doing. Use common sense Do not operate unit when you are tired.
- **USE THE RIGHT UNIT** – Do not use this unit for any job except that for which it is intended.
- **USE EXTRA CARE** when cleaning on stairs .
- **DO NOT** allow to be used as a toy . Close attention is necessary when used by or near children . Not recommended for use by children .
- **DO NOT** attempt to clear clogs from unit without first removing battery .
- **USE ONLY** as described in this manual.
- **USE ONLY** manufacturer's recommended attachments.
- **DO NOT** put any objects into openings . Do not use with any opening blocked; keep free of dust, lint, hair and everything that may reduce air flow .
- **KEEP** hair, loose clothing, fingers, and all parts of body away from openings and moving parts .
- **DO NOT** immerse any part of the unit in liquid .
- **DO NOT** handle charger, including charger plug, and charger terminals with wet hands.
- **KEEP CHILDREN, BYSTANDERS AND ANIMALS AWAY** from the work area a minimum of 30 feet (10 meters) when starting or operating the unit .
- **INSPECT THE AREA** before using the unit . Remove all debris and hard objects such as rocks, glass, wire, etc . that can ricochet, be thrown, or otherwise cause injury or damage during operation .
- **USE ONLY** charger supplied by the manufacturer to recharge .
- **EXERCISE CARE** in handling batteries in order not to short the battery with conducting materials such as rings, bracelets and keys . The battery or conductor may overheat and cause burns .
- **DO NOT OPEN OR MUTILATE** the batteries . Released electrolyte is corrosive and may cause damage to the eyes or skin . It may be toxic if swallowed
- **DO NOT CHARGE** the unit outdoors.

## IMPORTANT SAFETY INSTRUCTIONS FOR BATTERY CHARGERS

**SAVE THESE INSTRUCTIONS:** This manual contains important safety instructions for battery chargers .

- Before using the charger, read all instructions and cautionary markings on the charger, battery pack, and product.

### **WARNING: Shock hazard.**

Do not allow any liquid to get inside charger.

 **CAUTION: Burn hazard.** To reduce the risk of injury, charge only designated batteries. Other types of batteries may burst to cause personal injury and damage.

 **CAUTION:** Under certain conditions, with the charger, plugged into the power supply, the charger can be shorted by foreign material. Foreign materials of a conductive nature such as, but not limited to, steel wool, aluminum foil, or any buildup of metallic particles should be kept away from charger cavities. Always unplug the charger from the power supply when there is no battery pack in the cavity. Unplug the charger before attempting to clean.

### **WARNING:**

- **DO NOT** attempt to charge the battery pack with any chargers other than the ones in this manual. The charger and battery pack are specifically designed to work together.
- **These chargers are not intended for any uses other than charging designated rechargeable batteries.** Any other uses may result in a risk of fire, electric shock, or electrocution.
- **DO NOT** expose the charger to rain or snow.
- **Pull by plug rather than cord when disconnecting charger.** This will reduce the risk of damage to the electric plug and cord.
- **Make** sure that the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
- **DO NOT** use an extension cord unless it is absolutely necessary. Use of improper extension cord could result in a risk of fire, electric shock, or electrocution.
- **DO NOT** operate chargers with damaged cords or plugs — have them replaced immediately.



- **DO NOT** operate the charger if it has received a sharp blow, been dropped, or otherwise damaged in any way. Take it to an authorized service center.
- **DO NOT** disassemble the charger; take it to an authorized service center when service or repair is required. Incorrect reassembly may result in a risk of electric shock, electrocution, or fire.
- **Disconnect the charger from the outlet before attempting any cleaning.** This will reduce the risk of electric shock. Removing the battery pack will not reduce this risk.
- **NEVER attempt to connect 2 chargers together.**
- The charger is designed to operate on standard household electrical power (120 Volts). **Do not attempt to use it on any other voltage.**

## IMPORTANT SAFETY INSTRUCTIONS FOR BATTERY PACKS

**⚠️ WARNING:** For safe operation, read this manual and manuals originally supplied with tool before using the charger. The battery pack is not fully charged out of the carton. Before using the battery pack and charger, read the safety instructions below. Then follow the charging procedures outlined.

## READ ALL INSTRUCTIONS

- Do not incinerate the battery pack even if it is severely damaged or is completely worn out. The battery pack can explode in a fire. Toxic fumes and materials are created when battery packs are burned.
- Do not charge or use the battery in explosive atmospheres, such as in the presence of flammable liquids, gases, or dust. Inserting or removing the battery from the charger may ignite the dust or fumes.
- If battery contents come into contact with the skin, immediately wash the area with mild soap and water. If battery liquid gets into the eye, rinse water over the open eye for 15 minutes or until irritation ceases. If medical attention is needed, the battery electrolyte for Lithium-Ion batteries is composed of a mixture of liquid organic carbonates and lithium salts.

- Contents of opened battery cells may cause respiratory irritation. If symptoms persist, seek medical attention.

### **⚠️ WARNING: Burn hazard.**

Battery liquid may be flammable if exposed to spark or flame.

- Charge the battery packs only in original chargers.
- **DO NOT** splash or immerse in water or other liquids. This may cause premature cell failure.
- **DO NOT** store or use the tool and battery pack in locations where the temperature may reach or exceed 105°F (40°C) (such as outside sheds or metal buildings in summer)

### **⚠️ WARNING: Never attempt to open the battery pack for any reason.**

If the battery pack case is cracked or damaged, do not insert it into the charger. Do not crush, drop or damage the battery pack. Do not use a battery pack or charger that has received a sharp blow, been dropped, run over, or damaged in any way (i.e., pierced with a nail, hit with a hammer, stepped on). Damaged battery packs should be returned to the service center for recycling.

**⚠️ WARNING: Fire hazard.** Do not store or carry batteries so that metal objects can contact exposed battery terminals. For example, do not place batteries in aprons, pockets, tool boxes, product kit boxes, drawers, etc., with loose nails, screws, keys, etc. Transporting batteries can possibly cause fires if the battery terminals inadvertently come in contact with conductive materials such as keys, coins, hand tools, and the like. The US Department of Transportation Hazardous Material Regulations (HMR) actually prohibits transporting batteries in commerce or on airplanes (i.e., packed in suitcases and carry-on luggage) **UNLESS** they are properly protected from short circuits. So when transporting individual batteries, make sure that the battery terminals are protected and well insulated from materials that could contact them and cause a short circuit.

**NOTE:** Lithium-Ion batteries should not be put in checked baggage.

## STORAGE RECOMMENDATIONS

1. The best storage place is one that is cool and dry, away from direct sunlight and excess heat or cold.
2. Long-term storage will not harm the battery pack or charger.

## CHARGING PROCEDURE

1. Plug the charger into an appropriate outlet before inserting the battery pack.
2. Insert the battery pack into the charger.
3. The red LED will indicate that the battery is being charged.
4. The completion of charge is indicated by the green LED remaining on continuously. The pack is fully charged and may be used at this time or left on the charger.

**Note: Recharge discharged batteries as soon as possible after use or the battery life may be greatly diminished. For the longest battery life, do not discharge batteries fully.**

## IMPORTANT CHARGING NOTES

1. Longest life and best performance can be obtained if the battery pack is charged when the air temperature is between 65°F and 75°F (18°- 24°C) DO NOT charge the battery pack in an air temperature below +40°F (+4 .5°C), or above +105°F (+40 .5°C) This is important and will prevent serious damage to the battery pack.
2. The charger and battery pack may become warm to the touch while charging. This is a normal condition and does not indicate a problem. To facilitate the cooling of the battery pack after use, avoid placing the charger or battery pack in a warm environment such as in a metal shed, or an uninsulated trailer.

3. If the battery pack does not charge properly:

- Check the current at outlet by plugging in a lamp or other appliance
- Move charger and battery pack to a location where the surrounding air temperature is approximately 65°F - 75°F (18°- 24°C).
- If charging problems persist, take the tool, battery pack, and charger to your local service center.

4. The battery pack should be recharged when it fails to produce sufficient power on jobs that were easily done previously. Follow the charging procedure. You may also charge a partially used pack whenever you desire with no adverse effect on the battery pack.


### **⚠ WARNING: Shock hazard.**

Do not allow any liquid to get inside the charger. Never attempt to open the battery pack for any reason.



## FUNCTIONAL DESCRIPTION

1. Battery Pack
2. On/off Switch
3. Blower Tube
4. Extend nozzle

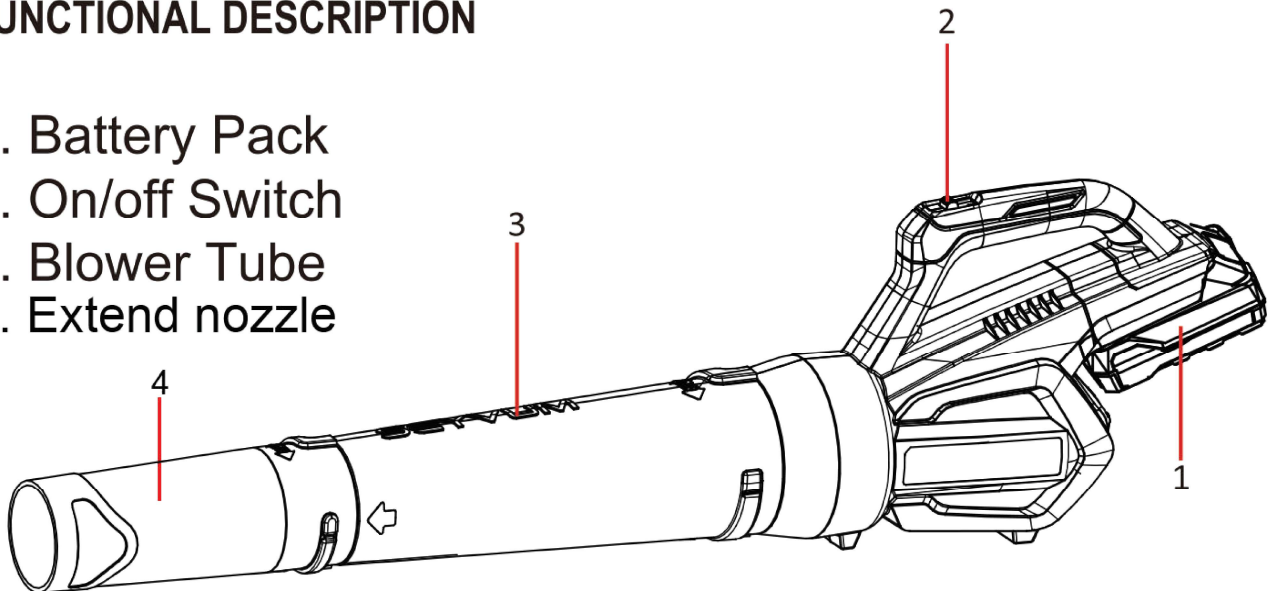

## TECHNICAL DATA

|                                                                                                                       |          |
|-----------------------------------------------------------------------------------------------------------------------|----------|
| MODEL                                                                                                                 | DCBL2006 |
| Voltage                                                                                                               | 20V Max* |
| *Voltage measured without workload. Initial battery voltage reaches maximum of 20 volts. Nominal voltage is 18 volts. |          |

## HOW TO ASSEMBLE AND DISASSEMBLE BLOWER TUBE


**⚠ CAUTION:** Always be sure that the tool is switched off and the battery pack is removed before carrying out any work on the tool.

### Assemble the Blower Tube

There are grooves(A) on both sides of the Extension nozzle and tabs(B) on both sides of the Blower tube.

Step1:

Aligning the grooves(A) and tabs(B), slowly and firmly slide the Extension nozzle on then Blower tube until they fit perfectly.

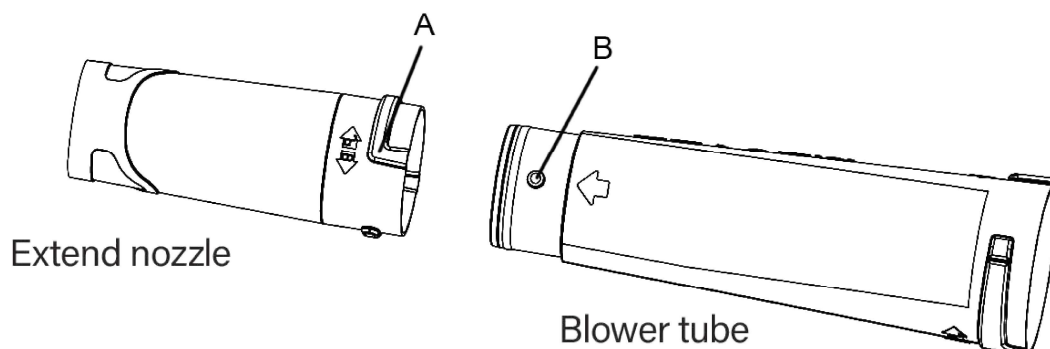




Step 2:

Hold the Extension nozzle and rotate counterclockwise until you hear an evident "click".



Please make sure the Extension nozzle is attached securely to the Blower tube.

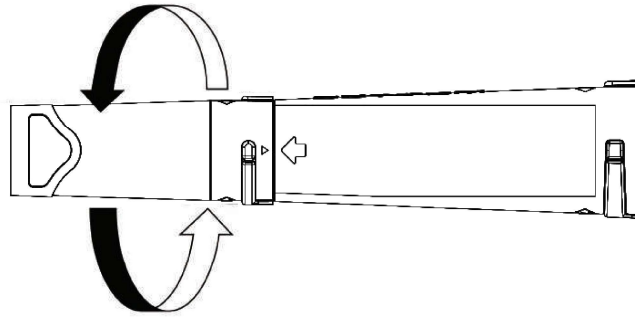

Step 3:


Please notice that the Long tab should be aligned with the Wide groove, and the Short tab with the Narrow groove.

Slowly and firmly insert the Blower tube and rotate it counterclockwise until you hear an evident "click".

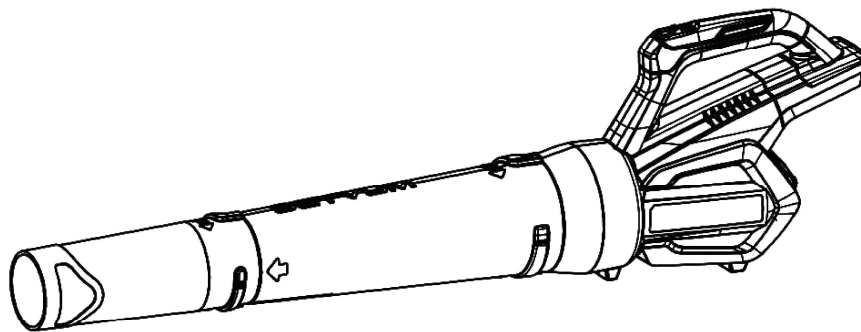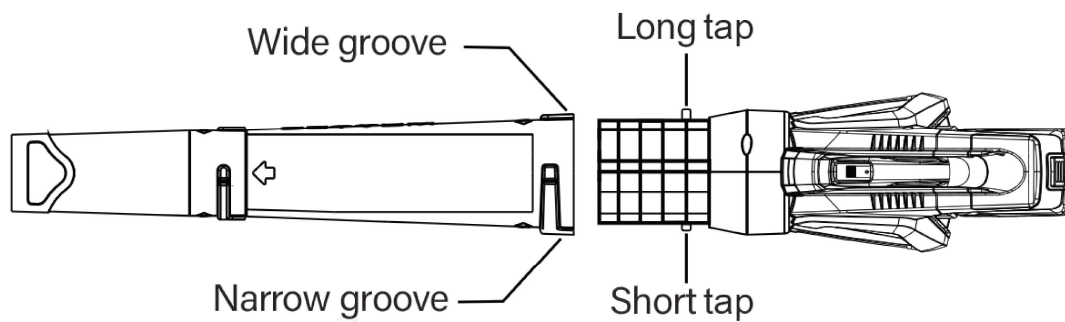

## ⚠NOTICE:

To make sure the installation of Blower tube and the Extend nozzle, notice the arrow and the lock highlighted in the figure below, when they are on the same line, the installation is correct and secure.

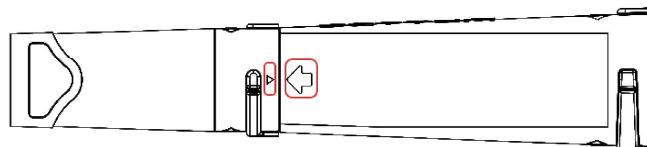

**⚠WARNING:** Do not attempt to operate or disable the On/Off Switch by any means other than the normal assembly or removal of the tube.

## DISASSEMBLE THE EXTENSION NOZZLE AND BLOWER TYBE

If you want to remove the Extension nozzle and Blower tube, please rotate them clockwise and pull them out.

# HOW TO USE LEAF BLOWER


## Switch Operation

To start the tool, simply press the "ON" button. To turn off the tool, press the "OFF" button.

## Select the Speed ( two-speed model only)

- Move the On/Off switch two times to select speed 2 for maximum power.
- The tool runs for a few seconds after it has been switched off. Let the motor come to a complete standstill before setting the tool down.

## Using the Blower

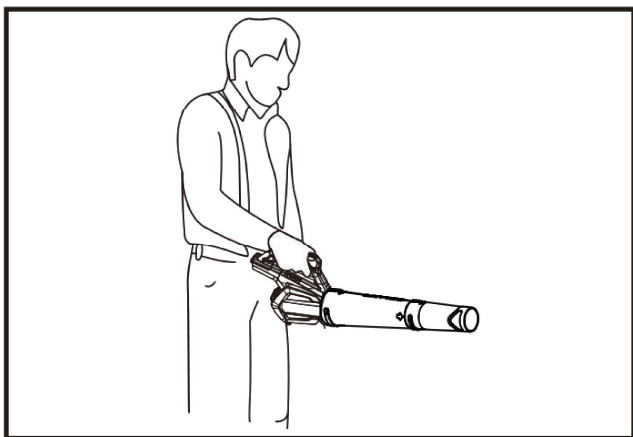

1. Hold the blower firmly in one hand and move it slowly to blow.
2. Hold the blow tube approx 7" above the ground when operating the tool. Use a sweeping motion from side to side. Advance slowly keeping the accumulated debris/leaves in front of you. After blowing the debris/leaves into a pile, it is easy to dispose of the pile.
3. When purging around buildings, large rocks, or vehicles, keep the nozzle away from them.
4. When working in a corner location, blow out the corner first, then move to a wider area.

## ⚠NOTICE:

- Do not blow hard objects such as nails, bolts, or rocks.
- Do not operate the blower near bystanders or pets.
- Use extra care when cleaning debris from stairs or other tight areas.
- Wear safety goggles or other suitable eye protection, long pants, and shoes.

# MAINTAINANCE

## Tips for Maintaining Maximum Battery Life

- Charge the battery pack in time before it is completely drained. When you find that the power of the tool is low, stop the tool operation and charge the battery pack.
- Do not recharge a fully charged battery pack. Overcharging will shorten the life of the battery.
- Please charge the battery pack at room temperature of 10°F-40°C (50°F-104°F). Please allow the hot battery pack to cool down before charging

## Battery Protection System

- The battery pack is equipped with a protection system that automatically cuts off the output power to extend the service life.
- While working, the tool may stop running when the tool and/or battery are in the following conditions. This is due to the activation of the protection system, not a tool failure.
- When the tool is overloaded: At this time, please press the "OFF" button and remove the overload fault, when the tool does not work even after pressing the button, it is due to the automatic battery power stop function. Please charge the battery pack before use.
- When the remaining power of the battery becomes low: Please charge the battery pack.

## Clean:

Always use a soft and dry cloth to remove dust from the surface of the tool.

## ⚠NOTICE:

- Never use gasoline, benzene, thinner, alcohol, or similar items to clean tools.
- Failure to do so may cause the tool to become discolored, deformed, or cracked.
- In order to ensure the safety and reliability of the product, maintenance, any other maintenance or adjustment shall be made by SEYVUM Authorized Repair Service Center to complete. be sure to use the SEYVUM replacement parts.




INSTALLING OR REMOVING THE BATTERY PACK

**⚠CAUTION:** Always switch off the tool before installing or removing the battery pack.

**⚠CAUTION:** Hold the tool and the battery pack firmly when installing or removing the battery pack. Failure to hold the tool and the battery pack firmly may cause them to slip off your hands and result in damage to the tool and battery pack and a personal injury.

BATTERY PACK

- 1. Button 2. Battery pack

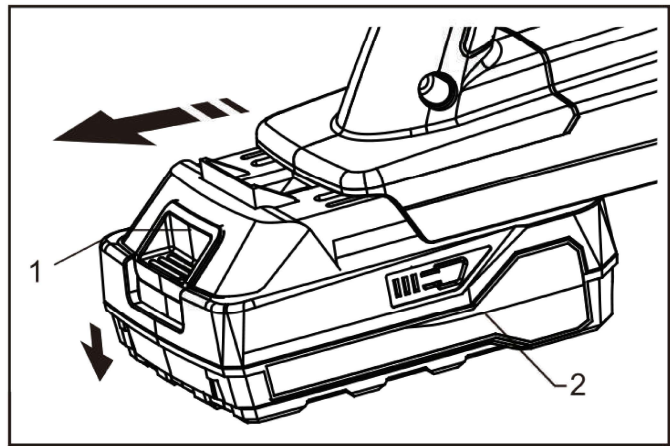


- To remove the battery pack, slide it from the tool while pressing the button on the front of the pack.
- To install the battery pack, align the tongue on the battery pack with the groove in the housing and slip it into place. Insert it all the way until it locks in place with a little click.

**⚠CAUTION:** Always install the battery pack fully until the click-lock cannot be seen. If not, it may accidentally fall out of the tool, causing injury to you or someone around you.

**⚠CAUTION:** Do not install the battery pack forcibly. If the pack does not slide in easily, it is not being inserted correctly.

POWER DISPLAY FOR THE BATTERY

When the tool automatically stopped frequently, please check the remaining battery capacity and charge the battery. Indicating the remaining battery capacity (on battery)

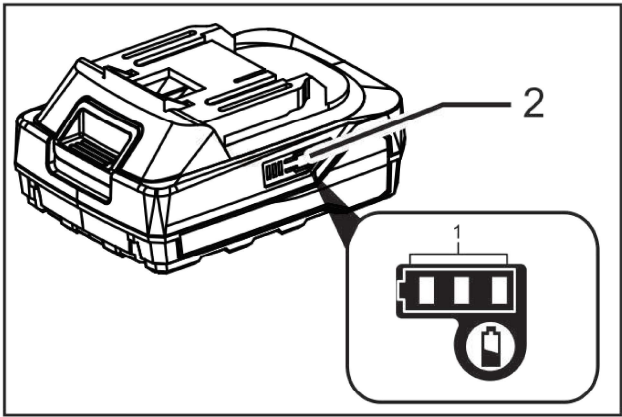

BATTERY PACK


- 1. Indicating LEDs 2. Check button

Press the check button on the battery pack to indicate the remaining battery capacity. The indicating LEDs light up for a few seconds.

| Indicator leds |     | Remaining capacity |
|----------------|-----|--------------------|
| Lighted        | Off |                    |
| ■ ■ ■          |     | 75% to 100%        |
| ■ ■ □          |     | 50% to 75%         |
| ■ □            |     | 0 % to 50%         |

**NOTE:** Depending on the conditions of use and the ambient temperature, the indication may differ slightly from the actual capacity.

RED: CHARGING / GREEN: FULLY CHARGED

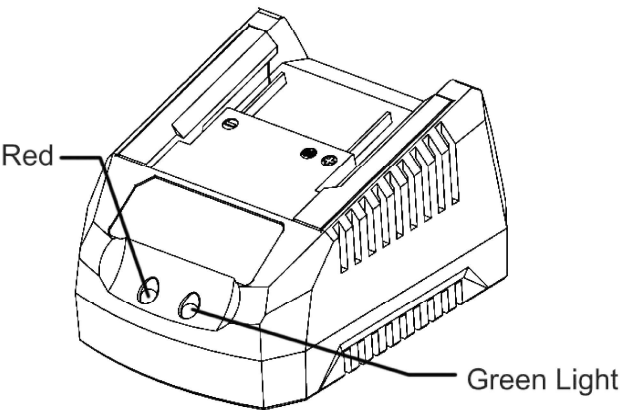

1. Plug the charger into an appropriate outlet before inserting the battery pack.
2. Insert the battery pack into the charger.
3. The red LED will be indicated that the battery is being charged.






4. The completion of the charge is indicated by the green LED remaining on continuously.

**Note:** The charger and battery pack can be left connected with the green LED glowing indefinitely. The charger will keep the battery pack fresh and fully charged.

## CHARGER QUICK GUIDE

NOTES: When the charging indicator is green, PLEASE REMOVE the battery as soon as possible. You'd better not keep a fully charged battery pack charging. Overcharging will shorten the battery's life and working performance.

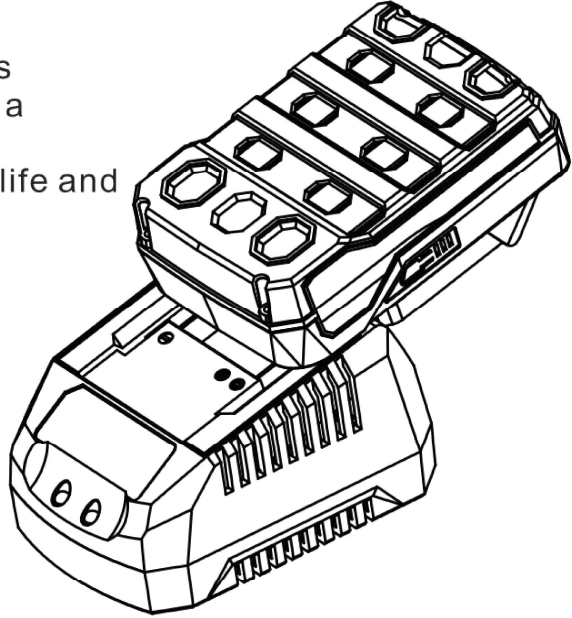

### TOOL / BATTERY PROTECTION SYSTEM

The tool is equipped with a tool/battery protection system. This system automatically cuts off power to the motor to extend tool and battery life. The tool will automatically stop during abnormal operation.

### OVERLOAD PROTECTION

When the tool is operated in a manner that causes it to draw an abnormally high current, the tool automatically stops without any indication. In this situation, turn the tool off and stop the application that caused the tool to become overloaded. Then turn the tool on to restart.

### OVERHEAT PROTECTION

When the tool is overheated, the tool stops automatically and the battery may get hot. In this situation, let the tool cool down before turning the tool on again.

### LOW POWER PROTECTION

When the battery capacity is not enough, the tool stops automatically. In this case, remove the battery from the tool and charge the battery.

If you have any questions or suggestions  
Please contact us at [support@seyvumtools.com](mailto:support@seyvumtools.com)  
[www.seyvumtools.com](http://www.seyvumtools.com)