



SILVERSTONE®
Designing Inspiration

NIGHTJAR

ST30NF

The proof that silence is powerful

All aluminum construction
Server-level components
Fan-less, 0 dBA acoustics
Status indicator LEDs
Dual serial ATA connectors
Active PFC

SPECIFICATION

SilverStone Nightjar ST30NF (EFN-300) Switching Power Supply With Active PFC PS/2 Fanless 300W

1. General

This specification describes the electrical characteristics, functional and physical of a PS/2 Fanless Switching power supply with Active PFC (Power Factor Correction) capabilities.

2. AC Input Characteristics

2.1 AC Input Voltage , Frequency and Current (Rating: 100V-240Vac, 47-63Hz, 6-3A)

The power supply must operate within all specified limits over the input voltage range in Table 1.

Harmonics distortion of up to 10% THD must not cause the power supply to go out of specified limits.

Parameter	Minimum	Rated	Maximum	Max. Input Current
Voltage (115V)	90 Vac	100-127Vac	132Vac	6 A
Voltage (230V)	180 Vac	200-240Vac	264Vac	5 A
Frequency	47 Hz	50 / 60 Hz	63 Hz	-

Table 1 - AC Input Voltage and Frequency

2.2 AC Input Current and Inrush Current

AC input current of the system shall meet the limits shown in Table 1. No damage shall occur or overstress input fuse shall blow (as a result of inrush). Under conditions; 132/264VAC full load turn off 1sec; turn on at peak of input voltage cycle 25°C air ambient cold start.

2.3 Input Power Factor Correction (Active PFC)

The power factor at full load shall be ≥ 0.96 at nominal input voltage.

2.4 Input Current Harmonics

When the power supply is operated in 90-264Vac of Sec. 2.1, the input harmonic current drawn on the power line shall not exceed the limits set by EN61000-3-2 class "D" standards. The power supply shall incorporate universal power input with active power factor correction..

2.5 AC Line Dropout

An AC line dropout of 20mS or less shall not cause any tripping of control signals or protection circuits.

If the AC dropout lasts longer than 20mS the power supply should recover and meet all turn on requirements. The power supply shall meet the regulation requirement over all rated AC voltages, frequencies, and output loading conditions. Any dropout of the AC line shall not cause damage to the power supply. An AC line dropout is defined as a drop in AC line to 0VAC at any phase of the AC line for any length of time.

2.6 AC Surge Voltages

The power supply shall be tested and be compliant with the requirements of IEC61000-4-5 Level 3 criteria for surge withstand capability, with the following conditions and exceptions. The test equipment and calibrated waveforms shall comply with the requirements of IEC61000-4-5 for open circuit voltage and short circuit current.

- ▶ These input transients must not cause any out of regulation conditions, such as overshoot and undershoot, nor must it cause any nuisance trips of the power supply protection circuits.
- ▶ The surge-withstand test must not produce damage to the power supply
- ▶ The power supply must meet surge-withstand test condition under maximum and minimum DC output load conditions.

2.7 Surge Immunity, IEC61000-4-5

The peak value of the unidirectional surge waveform shall be 2KV for common mode and 1KV for differential mode of transient surge injection. No unsafe operation or no user noticeable degradation is allowed under any condition. Automatic or manual recovery is allowed for other conditions.

2.8 Electrical Fast Transient / Burst, IEC61000-4-4

No unsafe operation allowed under any condition. No user noticeable performance degradation up to 1KV is allowed. Automatic or manual recovery is allowed for other conditions.

2.9 Electrical Discharge, IEC61000-4-2

In addition to IEC61000-4-2, the following ESD tests should be conducted. Each surface area of the unit under test should be subjected to twenty (20) successive static discharges, at each of the follow voltages: 2KV, 3KV, 4KV, 5KV, 6KVand 8KV.

All power supply outputs shall continue to operate within the parameters of this specification, without glitches or interruption, while the power is operating as defined and subjected to 2kV through 10kV ESD pulses. The direct ESD event shall not cause any out of regulation conditions such as overshoot or undershoot. The power supply shall withstand these shocks without nuisance trips of the Over-Voltage Protection, Over-Current Protection, or the remote +5VDC, +12VDC shutdown circuitry.

2.10 Radiated Immunity, IEC61000-4-3

Frequency	Electric Field Strength
27 MHz to 500 MHz, un-modulated	3 V/m

3. DC Output Specification

3.1 Output Current / Loading

The following tables define two power and current rating. The power supply shall meet both static and dynamic voltage regulation requirements for minimum load condition.

a. Input Voltage 200V~240V

Output Voltage	+5V	+3.3V	+12V	-12V	+5VSB
Max. Load	21A	20A	17A	0.6A	1.5A
Min. Load	1A	0.8A	0.5A	0.1A	0.1A

Table 5 - High Load Range 1

Note 1: The +5 & +3.3 Volt total output shall not exceed 150 W.
Note 2: The +5, +3.3 & +12Volt total output shall not exceed 440W.
Note 3: Maximum continues total DC output power shout not exceed 460W.



b. Input Voltage 100V~120V

Output Voltage	+5V	+3.3V	+12V	-12V	+5VSB
Max. Load	21A	20A	17A	0.6A	1.5A
Min. Load	1A	0.8A	0.5A	0.1A	0.1A

Table6 - Low Load Range 1

Note 1: The +5 & +3.3 Volt total output shall not exceed 140 W.

Note 2: The +5, +3.3 & +12Volt total output shall not exceed 230W.

Note 3: Maximum continuous total DC output power shout not exceed 250W.

**** An optional fan kit (sold separately) can be installed to increase performance to 550W

Output Voltage	+5V	+3.3V	+12V	-12V	+5VSB
Max. Load	35A	30A	32A	0.7A	2A
Min. Load	2A	1A	1A	0A	0A

Note 3: Maximum continuous total DC output power shout not exceed 550W.

3.2 DC Voltage Regulations, Ripple and Noise

The power supply output voltages must stay within the following voltage limits when operating at steady state and dynamic loading conditions. All outputs are measured with reference to the return remote sense (ReturnS) signal. The +5V,+12V1,+12V2, -5V,-12V and +5BSB outputs are measure at the power supply connectors references to ReturnS. The +5V and +3.3V is measured at its remote sense signal (+5VS+, +3.3VS+) located at the signal connector

Output Voltage	+5V	+3.3V	+12V	-12V	+5VSB
Load Reg.	+5%/-5%	+5%/-5%	+5%/-5%	+10%/-10%	+5%/-5%
Line Reg.	± 1%	± 1%	± 1%	± 1%	± 1%
Ripple & Noise	50mV	50mV	120mV	120mV	50mV

Table 7 - Regulation, ripple and noise

Ripple and noise shall be measured using the following methods:

- Measurements made differentially to eliminate common-mode noise
- Ground lead length of oscilloscope probe shall be[0.25 inch.
- Measurements made where the cable connectors attach to the load.
- Outputs bypassed at the point of measurement with a parallel combination of 10uF tantalum capacitor in parallel with a 0.1uF ceramic capacitors.
- Oscilloscope bandwidth of 0 Hz to 20MHz.
- Measurements measured at locations where remote sense wires are connected.
- Regulation tolerance shall include temperature change, warm up drift and dynamic load

3.3 Dynamic Loading

The output voltages shall remain within the limits specified in Table 7 for the step loading and within the limits specified in Table 8 for the capacitive loading. The load transient repetition rate shall be tested between 50Hz and 5kHz at duty cycle ranging from 10%-90%. The load transient repetition rate is only a test specification. The Δ step load may occur anywhere within the MIN load to the MAX load shown in Table 5 and Table 6.

Output	Δ ep Load Size	Load Slew Rate	Capacitive Load
+5V	30% of Max. Load	0.5 A/uS	1000 uF
+3.3V	30% of Max. Load	0.5 A/uS	1000 uF
+12V	30% of Max. Load	0.5 A/uS	2200 uF
+5VSB	30% of Max. Load	0.5 A/uS	1 uF

Table 8 - Transient Load requirements

3.4 Capacitive Loading

The power supply shall be stable and meet all requirements, except dynamic loading requirements, with the following capacitive loading ranges

Output	MIN	MAX	Units
+5V	10	12,000	uF
+3.3V	10	12,000	uF
+12V	10	11,000	uF
+12V	1	350	uF
+5VSB	1	350	uF

Table 9 - Capacitive Loading Conditions

3.5 Timing Requirements

These are the timing requirements for the power assembly operation. The output voltages must rise from 10% to within regulation limits (Tvout_rise) within 5 to 200mS. The +5V, +3.3V and +12V output voltages should start to rise at about the same time. All outputs must rise monotonically. The +5V output needs to be greater than +3.3V output during any point of the voltage rise. The +5V output must never be greater than the +3.3V output by more than 2.25V. Each output voltage shall reach regulation within 50 mS (Tvout_on) of each other during turn on of the power supply. Each output voltage shall fall out of regulation within 400 mS (Tvout_off) of each other during turn off. Figure 1 and figure 2 show the turn On and turn Off timing requirement. In Figure 2, the timing is shown with both AC and PSON# controlling the On/Off of the power supply.

Item	rin	MIN	MAX	Units
Tvout_rise	Output voltage rise time from each main output	5	70	mS
Tvout_on	All main output must be within regulation of each other within this time.		50	mS
Tvout_off	All main output must leave regulation within this time		400	mS

Table 10 - Output Voltage Timing


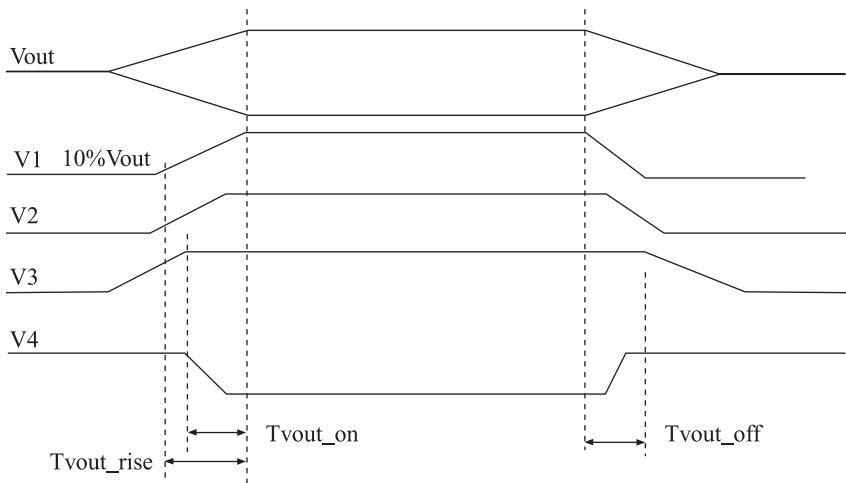


Figure 1 :Output Voltage Timing

Item	rin	MIN	MAX	Units
Tsb_on-delay	Delay from AC being applied to +5VSB being within regulation		1500	mS
Tsb_on-delay	Delay from AC being applied to all output voltages being within regulation.		2500	mS
Tvout_holdup	Time all output voltage stay within regulation after loss of AC	17		mS
Tpwok_holdup	Delay from loss of AC deassertion of PWOK.	16		mS
Tpson_on_delay	Delay from PS0N# active to output voltage within regulation limits.	5	400	mS
Tpson_pwok	Delay from PS0N# deactive to PWOK being deasserted.		50	mS
Tpwok_on	Delay from output voltage within regulation limits to PWOK asserted at turn on.	100	1000	mS
Tpwok_off	Delay from PWOK deasserted to output voltages (+5V, +3.3V, +12V, -12V) dropping out of regulation limits.	1		mS
Tpwok_low	Duration of PWOK being in the deasserted state during an off/on cycle using AC or the PS0N# signal. .	100		mS
Tsb_vout	Delay from +5VSB being in regulation to O/Ps being in regulation at AC turn on.	50		mS

Table 11 - Turn On/Off Timing

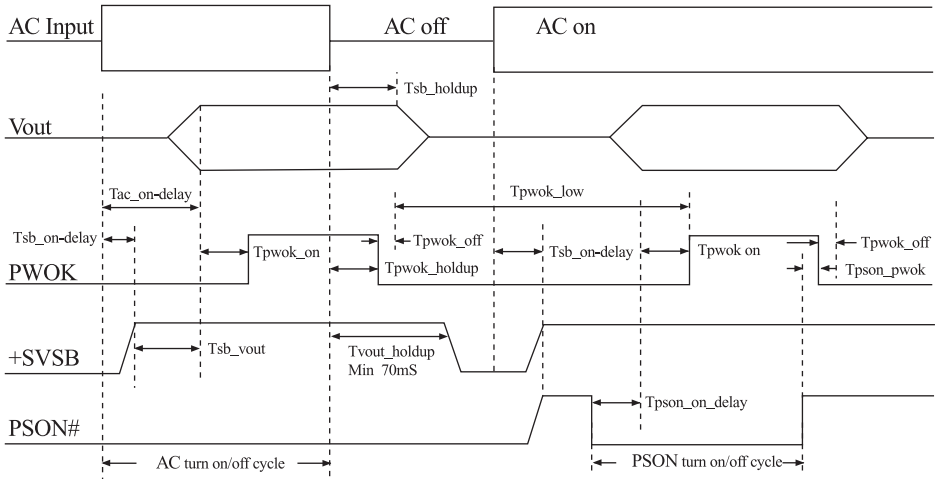

Signal Type	Open collector/drain output from power supply. Pull-up to VSB located in power supply.	
PWOK = High	Power OK	
PWOK = Low	Power is Not OK	
	MIN	MAX
Logic level low voltage, $I_{sink} = 4mA$	0V	0.4V
Logic level high voltage, $I_{source} = 200\mu A$	2.0V	5.25V
Sink current, PWOK = Low		4mA
Source current, PWOK = High		2mA
PWOK delay: T_{pwok_on}	100mSec	1000mSec
PWOK rise and fall time		100mSec
PWOK down delay : T_{pwok_off}	2mSec	200mSec

Table 12 - PWOK Signal Characteristics

3.7 Remote On/Off Control: PSON#

The PSON# signal is required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the +5V, +3.3V, +12V and -12V power rails. When this signal is not pulled low by the system, or left open, the outputs(except the +5VSB and Vbias) turn off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply.

Signal Type	Accepts an open collector/drain input from the system. Pull-up to VSB locted in power supply.	
PSON# = Low	Power ON	
PSON# = Open	Power OFF	
	MIN	MAX
Logic level low (Power supply ON)	0V	0.8V
Logic level low (Power supply OFF)	2.0V	5.25V
Source current, Vpson = Low		4mA
Power up delay: Tpson_on_delay	5mSec	400mSec
PWOK delay : Tpson_pwok		50mSec

Table 13 - PWOK Signal Characteristics

3.8 Overshoot at Turn-on /Turn-off

Any output overshoot at turn on shall be less than 10% of the nominal output value. Any overshoot shall recover to within regulation in less than 10ms.

3.9 Efficiency

The minimum power supply system efficiency shall be $\geq 70\%$, measured at nominal input voltage 115 V or 230 V and full loading.

3.10 +5VSB (Standby)

The +5VSB output is always on (+5V Standby) when AC power is applied and power switch is turned on. The +5VSB line is capable of delivering at a maximum of 1.5A for PC board circuit to operate

4. Protection

Protection circuits inside the power supply shall cause only the power supply's main outputs to shutdown. If the power supply latches off due to a protection circuit tripping, either an AC cycle OFF for 15 sec, or PSON# cycle HIGH for 1 sec must be able to restart the power supply.

4.1 Over Current Protection

This power supply shall have current limit to prevent the +5V, +3.3V, and +12V outputs from exceeding the values shown in table 14. The current limit shall not trip under maximum continuous load or peak loading as described in Table 5. The power supply shall latch off if the current exceeds the limit. The latch shall be cleared by toggling the PSON# signal or by cycling the AC power. The power supply shall not be damaged from repeated power cycling in this condition. The -12V and +5VSB outputs shall be shorted circuit protected so that no damage can occur to the power supply.

Voltage	Minimum	Maximum	Shutdown Mode
+5V	110%	200%	Latch Off
+3.3V	110%	200%	Latch Off
+12V(Combined)	110%	250%	Latch Off

Table 14 -Over Current protection

* An optional fan kit (sold separately) can be installed to increase performance to 500W

Voltage	Minimum	Maximum	Shutdown Mode
+5V	110%	150%	Latch Off
+3.3V	110%	150%	Latch Off
+12V(Combined)	110%	150%	Latch Off

Table 15 -Over Current protection

4.2 Over Voltage Protection

The power supply shall shut down in a latch off mode when the output voltage exceeds the over voltage limit shown in Table 4.

Voltage	Minimum	Maximum	Shutdown Mode
+5V	+5.6V	+6.5V	Latch Off
+3.3V	+3.8V	+4.5V	Latch Off
+12V1,+12V2	+13.2V	+15.5V	Latch Off

Table 16 -Over Voltage protection

4.3 Short Circuit Protection

The power supply shall shut down in a latch off mode when the output voltage is short circuit.

4.4 No Load Operation

When the primary power is applied, with no load on any output voltage, no damage or hazardous conditions shall occur. In such a case, the power supply shall power up and stabilize.

5. Environmental Requirements

5.1 Temperature

Operating Temperature Range	0°C ~ 40°C (32°F ~ 104°F) *w/ fan kit* 0°C ~ 50°C (32°F ~ 122°F)
Non-Operating Temperature Range	-40°C ~ 70°C (-40°F ~ 158°F)

5.2 Humidity

Operating Temperature Range	20%~90%RH non-condensing
Non-Operating Temperature Range	5%~95%RH non-condensing

5.3 Altitude

Operating Temperature Range	Sea level to 10,000 ft
Non-Operating Temperature Range	Sea level to 40,000 ft

5.4 Mechanical Shock

The power supply (non-operating) shall not be damaged during a shock of 50G with an 11 mS half sin wave, non-operating. The shock to be applied in each of the orthogonal axes.

5.5 Vibration (Operating and Non-operating)

The power supply shall be subjected to a vibration test consisting of a 10 to 300 Hz sweep at a constant acceleration of 2.0g for duration of one (1) hour for each of the perpendicular axes X, Y and Z,

1. 0.1 octave/minute. The output voltages shall remain within specification.

5.6 Acoustic Noise

The power supply shall be tested in accordance with specifications. The overall sound is measured with the noise meter placed 1 meter from the nearest vertical surface of center of fan installed in power supply.

CONDITIONS LIMITS:

115 VAC Input, full load of +5V Acoustic noise is 0 db design, 1A of +12V.

6. Agency Requirements

6.1 Safety Certification.

Product Safety	UL 60950 2000Edition, IEC60950, 3rd Edition
	EU Low Voltage Directive(73/23/EEC) (CE)
	TUV
RFI Emission	FCC Part15 (Radiated & Conducted Emissions)
	CISPR 22,3rd Edition/ EN55022 Class B)
PFC Harmonic	EN 61000-3-2
Flicker	EN 61000-3-3
Immunity against	EN55024: 1998
-Electrostatic discharge	-IEC 61000-4-2 Min. 4kV contact discharge
	Min. 8kV air discharge
-Radiated field strength	-IEC 61000-4-3 Min. 10V/m
-Fast transients	-IEC 61000-4-4 Min 2kV AC input lines
	Min 1kV on data lines
-Surge voltage	-IEC 61000-4-5 Min 2kV common mode
	Min 1kV differential mode
-RF Conducted	-IEC 61000-4-6
-Voltage Dips and Interruptions	-IEC 61000-4-11

6.2 Input Leakage Current

Input leakage current from line to ground will be less than 3.5mA rms. Measurement will be made at 240 VAC and 60Hz.

6.3 Production Line Testing

100% of the power supply production must have the following test performed. Each power shall be marked indicating the testing was done and passed. Typically this is done by stamping or labeling the power supply with "Hi-pot test OK".

6.4 Hi-Pot Testing

Each power supply must be Hi-pot tested according UL and TUV requirements, Minimum typical testing voltage for Hi-pot testing are 1500Vac or 2121Vdc. However depending on the power supply design the testing voltage May be higher. If higher the power supplies shell be at the higher value.

6.5 Ground Continuity Testing

UL and TUV require that each power supply ground is tested, to ensure there is continuity between the ground inlet of the power supply and the power supply chassis. This can be performed with an ohm meter, or an electronic circuit that lights up and illustrates the ground has continuity. Based on EN50116, ERG or TUV require that each power supply ground id tested with a 25Amp ground test.

7. Reliability

7.1 Mean Time Between failures (MTBF)

The MTBF of the power supply shall be calculated utilizing the Part-Stress Analysis method of Bellcore MIL217F. The calculated MTBF of the power supply shall be greater than 100,000 hours under the following conditions:

Full rated load, 120V AC input, Ground Benign, 25°C

7.2 Warranty

Three (3) years manufacture's warranty.

Date code indicating the year (200X, X is the first code) and week (2, 3 Code is the week) of manufacture.

Technical information in this specification is subject to change without notice.
The revision of specification will be marked on the cover.

8. LED Indicators s & Connections

8.1 LED Indicators






There shall be a single bi-color LED or Two LEDs, one AMBER and one GREEN, on each hot swap power module to indicate power supply status. When AC is applied to the power supply and standby voltage is available the GREEN LED shall BLINK. The GREEN LED shall turn ON to indicate that all the power outputs are available. The AMBER LED shall turn ON to indicate that the power supply has failed, shutdown due to over current, or shutdown due to component failure.

The LED(s) shall be visible on the power supply's exterior face. The LED location shall meet ESD requirements. LED shall be securely mounted in such a way that incidental pressure on the LED shall not cause it to become displaced.

9. Physical Characteristics Size

9.1 Weight: 2.8Kg

9.2 Power Supply Dimension: 150mm(W) x 86.0mm(H) x 140mm(D)

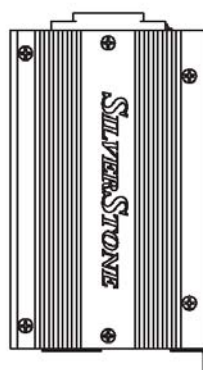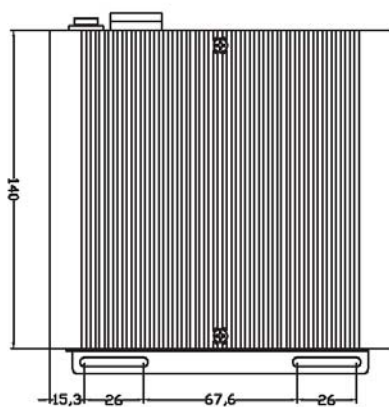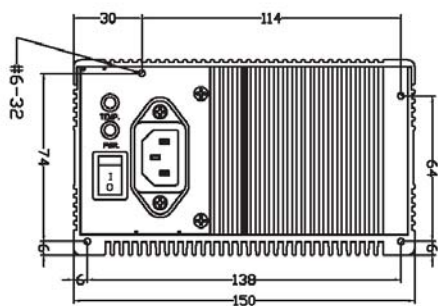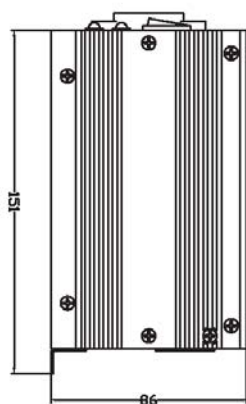

SilverStone Technology Co., Ltd.

www.silverstonetek.com

support@silverstonetek.com

Issue date: June, 2005