



无线便携式扩音器
使用手册

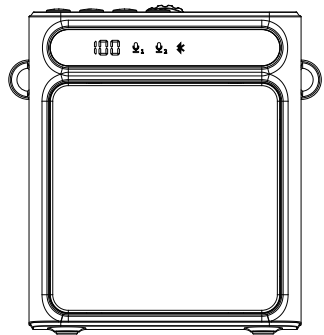

产品介绍

麦克风功能说明:

- ①MIC金属网
②夹子
③单击静音/长按开机机
④静音指示灯
⑤连接状态指示灯
⑥麦克风收音口

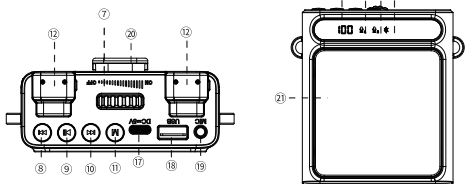

- ①麦克风取出或电源按键短按2S即开机, 指示灯红绿灯闪烁, 自动连接后, 绿灯常亮, 即可使用
②顺时针旋转旋钮即可开机, 单击模式键, 即可搜索蓝牙 DX-1并连接
③蓝牙模式下, 单击模式键, 插入U盘, 即可播放U盘内的歌曲 (开机情况下, 默认U盘模式)

UI功能

发射端

扩音器功能说明:

- ⑦旋钮开关/音量调节
⑧下一曲
⑨播放/暂停
⑩上一曲
⑪模式切换
⑫麦克风充电收纳区
⑬电量显示100
⑭麦克风1
⑮麦克风2
⑯蓝牙/无线麦克风
⑰充电插口
⑱U盘接口
⑲麦克风输入插口
⑳背夹
㉑喇叭出音孔

按键功能	实现状态	操作	提示音	指示灯
开机	在主机内	取出TX	/	绿灯闪
	在主机外	长按TX开关机键2秒	/	绿灯闪
	在主机外	放入主机	/	红灯长亮 (进入充电状态)
	在主机外	长按TX开关机键3秒	/	无灯闪
关机	在主机外	长按TX开关机键3秒	/	无灯闪
	在主机外	1分钟未和主机连接自动关机	/	无灯闪
	在主机内	取出TX, 主机开机, TX和主机自动配对连接	/	TX和主机连接上后, TX绿灯长亮, 主机绿灯长亮
	与RX配对	取出TX, 主机开机, TX和主机自动配对连接	/	TX和主机连接上后, TX绿灯长亮, 主机绿灯长亮
静音	连接状态	短按开机按键	/	红灯长亮
锁定	连接状态	三击开机按键	/	红灯闪烁两次
解锁	开机状态	三击开机按键	/	红灯常亮两秒
断开连接	待机	关掉主机或TX关机	/	断开连接TX绿灯闪, 主机绿灯闪
低电报警	开机状态	当电池电压低于3.3V	/	红灯闪
低电关机	各种开机状态中	当电池电压低于3.1V时耳机将自动关机	/	无灯闪
充电	各种开机状态中	放入主机	/	充电红灯长亮, 充满灭灯
充电电流	70mA			

扩音器主体

麦克风模式

按键功能	实现状态	操作	提示音	指示灯
开机	关机状态	旋钮扭到 ON 位置	开机-麦克风模式/POWER ON-Microphone mode	数码管显示当前电量, 麦连接位置指示绿灯闪
关机	开机状态	旋钮扭到 OFF 位置	/	所有灯灭
与TX配对	关机状态	TX开机, 主机开机, TX和主机自动配对连接	/	TX和主机连接上后, TX绿灯长亮, 主机绿灯长亮
断开连接	待机	主机关机或TX关机	/	断开连接TX绿灯闪, 主机绿灯闪

U盘模式


按键功能	实现状态	操作	提示音	指示灯
插入U盘	开机状态	插入U盘	U盘模式/USB mode	/
音乐暂停/播放	播放音乐状态	短按播放/暂停键	/	/
上一曲	播放音乐状态	短按上一曲键	/	/
下一曲	播放音乐状态	短按下一曲键	/	/
音量调节	播放音乐状态	旋转旋钮调节音量	/	/
录音	播放音乐状态	长按暂停/播放键 2秒	开始录音/Start recording	/
录音回放	录音状态	短按暂停/播放键 停止录音并回放	/	/
切换回U盘模式	录音回放状态	短按模式键	U盘模式/USB mode	/

蓝牙模式

按键功能	实现状态	操作	提示音	指示灯
开机	关机状态	旋钮扭到 ON 位置, 单击开键	蓝牙模式/Bluetooth mode	蓝牙位置的指示灯绿灯闪
关机	开机状态	在蓝牙模式下, 单击键或旋钮扭到 OFF 位置	/	蓝牙位置的指示灯绿灯熄灭
与手机配对	关机状态	旋钮扭到 ON 位置, 单击开键, 手机搜索 DX-1 配对并连接	蓝牙模式-蓝牙已连接/Bluetooth mode-Connected	连接成功后 蓝牙位置绿灯长亮
断开连接	待机	关闭手机蓝牙	蓝牙已断开/Disconnected	蓝牙位置的指示灯绿灯闪
音乐暂停/播放	播放音乐状态	短按播放/暂停键	/	蓝牙位置红灯长亮
上一曲	播放音乐状态	短按上一曲键	/	蓝牙位置红灯长亮
下一曲	播放音乐状态	短按下一曲键	/	蓝牙位置红灯长亮
音量调节	播放音乐状态	旋转旋钮调节音量	/	蓝牙位置红灯长亮
语言切换	开机状态	三击模式切换按键	中文/英文	/
低电报警	开机状态	当电池电压低于3.6V	电量低/Low Battery	/
低电关机	各种开机状态中	当电池电压低于3.3V时将自动关机	/	无灯闪
放电 (给TX充电)	各种状态中	放入TX	/	TX, 红灯长亮, 双绿灯长亮
充电	各种状态中	插上充电器	/	数码管显示当前电量, 电量数值持续上升, 直到显示100%, 表示充电完成
充电电流	1000mA			

Wireless portable
Loudspeaker


User Manual

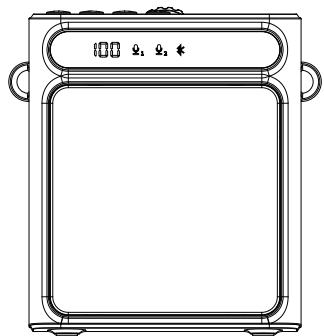

Product Introduction

Microphone function:

- ①MIC metal mesh
②Clip
③Click mute/long press power on/off
④Mute indicator light
⑤Connection indicator light
⑥Microphone receiver port

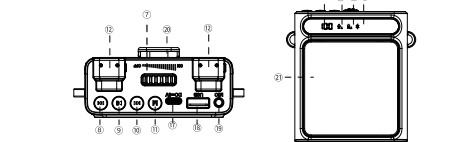

- ①Take out the microphone or press the power button briefly for 2 second to turn on the device. The indicator lights will flash red and green. After automatic connection, the green light will remain on, indicating that the device is ready for use
②Rotate the knob clockwise to turn on the device, click the mode button to search for Bluetooth DX-1 and connect
③In Bluetooth mode, click the mode button and insert a USB flash drive to play the songs on the drive (default USB mode when turned on)

Loudspeaker
Function Description:

- ⑦Knob start /volume adjustment
⑧Next Track
⑨Play
⑩Previous track
⑪Mode Switch
⑫Microphone storage area
⑬Battery Level Display
⑭Microphone 1
⑮Microphone 2
⑯Bluetooth connection
⑰Catchercharging port
⑱USB port
⑲Input interface
⑳Clip
㉑Sound hole

UI

Transmitter

Function	State	Operation	Prompt sound	LED
Power on	Inside the host	Remove TX	/	Blue light flashing
	Outside the host	Long press the TX power button for 2 seconds	/	Blue light flashing
	Outside the host	Insert into the host	/	The red light stays on for a long time
	Outside the host	Long press the TX power button for 3 seconds	/	No flashing lights
Power off	Outside the host	Automatic shutdown if not connected for 1 minute	/	No flashing lights
	Outside the host	Auto pairing	/	After connection, the TX green light remains on and the host green light remains on
	Connection status	Short press the power button	/	The red light is always on
	Connection status	Three clicks on the power button	/	The red light flashes twice
Unlock	Power on status	Three clicks on the power button	/	The red light stays on for 2 seconds
Disconnect	Standby	Turn off the host or TX shutdown	/	Disconnect, TX blue light flashes, host green light flashes
Low electricity	Power on status	The battery voltage is below 3.3V	/	Red light flashing
Low power shutdown	Power on status	The earphones automatically shut down when the battery voltage drops below 3.1V	/	No flashing lights
Charge	Power on status	Insert into the host	/	The charging red light is always on, and the fully charged light is off
Charging current	50mA			

Loudspeaker

Microphone mode

Function	State	Operation	Prompt sound	LED
Power on	Shutdown status	Turn to the ON position	Power on/microphone mode	Display current battery level, TX1, TX2 green light flashing
Power off	Power on status	Turn to the OFF position	/	All lights off
Pair with TX	Shutdown status	Automatic connection	/	TX blue light is always on, host green light is always on
Disconnect	Standby	Shutdown	/	TX blue light flashing, host green light flashing

U disk mode

Insert USB flash drive	Power on status	Insert USB flash drive
Music pause /play	Playing music status	Short press the play/pause button
Previous song	Playing music status	Short press the previous song
Next song	Playing music status	Short press a song
Volume control	Playing music status	Turn the knob to adjust the volume

BT mode

Function	State	Operation	Prompt sound	LED
Power on	Shutdown status	Turn the knob to ON and click the M key	BT mode	The BT indicator light is flashing green
Power off	Power on status	Click the M button to turn the cargo knob to OFF	/	The BT indicator light is off
Pair with mobile phone	Shutdown status	Turn the knob to ON, click the M key, and search for DX-1 pairing connection on your phone	BT mode - BT connected	After connection, the BT indicator light remains green
Disconnect	Standby	Turn off BT on your phone	BT disconnected	BT indicator green light flashing
Music pause /play	Playing music status	Short press the play/pause button	/	BT indicator green light is always on
Previous song	Playing music status	Short press the previous song	/	BT indicator green light is always on
Next song	Playing music status	Short press a song	/	BT indicator green light is always on
Volume control	Playing music status	Turn the knob to adjust the volume	/	BT indicator green light is always on
Low electricity	Power on status	The battery voltage is below 3.6V	LOW BATTERY	/
Low power shutdown	Power on status	Automatic shutdown when battery voltage drops below 3.3V	/	No flashing lights
Charge		Plug in the 5V charger	/	Display 100%, indicating charging completion
Charging current	1000mA			

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.