



AIC-510B(520B)
AIC-810W(820W)

.....

QUICK GUIDE

Outdoor PoE Camera



Quick start guide

1. Packing list
2. Product description
3. Installation
4. Product configuration
5. Specification
6. Legal notice

1. Packing list

1.1 Packing List of Bullet Camera


			
Camera X1	Screw Package X1	Drill Template X1	Screw-driver X1
			
Network Cable X1	Waterproof Terminal X1	Warning Sticker X2	Manual X1

1.2 Packing List of Dome Camera

			
Camera X1	Screw Package X1	Drill Template X1	Waterproof Terminal X1
			
Network Cable X1	Warning Sticker X2	Manual X1	


2. Product description

2.1 Product description of Bullet Camera

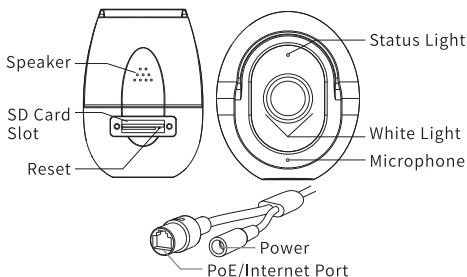

Power	DC 12V/1A or PoE
Status Light	• Solid red light on: camera is starting up • Blinking red light: camera is on but not connected to the network • Solid blue light on: camera is connected to the network cable
Microphone	Capture sound for the videos
SD Card Slot	SD card is only available when the camera is used as a single product, it does not work when the camera is connected to the NVR
Reset	Press and hold for 5 seconds to reset
PoE	Interface for wired network. You can connect the PoE power port of the camera to the PoE router to use; or connect the PoE port to the NVR and use it together as a set


2.2 Product description of Dome Camera

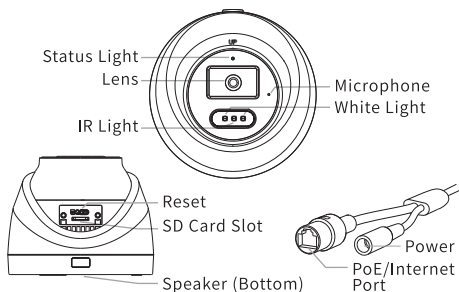

Power	DC 12V/1A or PoE
Status Light	• Solid red light on: camera is starting up • Blinking red light: camera is on but not connected to the network • Solid blue light on: camera is connected to the network cable
Microphone	Capture sound for the videos
SD Card Slot	SD card is only available when the camera is used as a single product, it does not work when the camera is connected to the NVR
Reset	Press and hold for 5 seconds to reset
PoE	Interface for wired network. You can connect the PoE power port of the camera to the PoE router to use; or connect the PoE port to the NVR and use it together as a set


3. Installation

3.1 NVR/Camera/Screen Connection

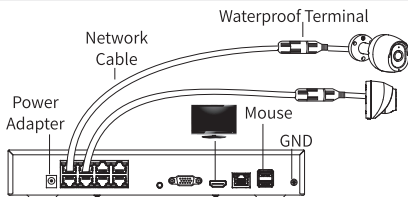


Note: For more detailed operation of NVR, please refer to the NVR user manual.

3.2 Waterproof Terminal Connection

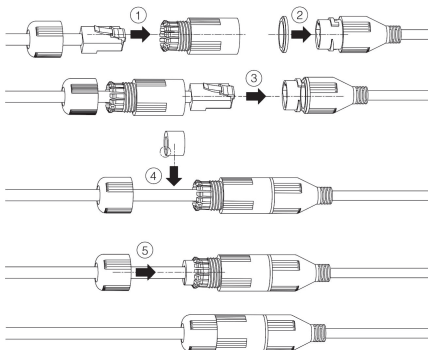

3.3 Bracket Installation of Bullet Camera

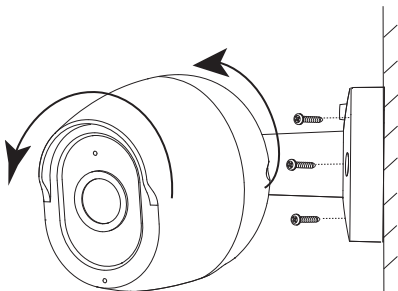



1. Fix the camera to the wall with screws.
2. Adjust camera angle to a suitable view (as shown in the picture).

Note:



Please arrange the PoE port indoors or install waterproof terminals to prevent water leakage at the connections and affect the normal use.

3.4 Bracket Installation of Dome Camera

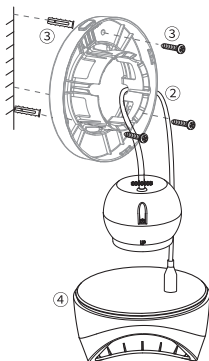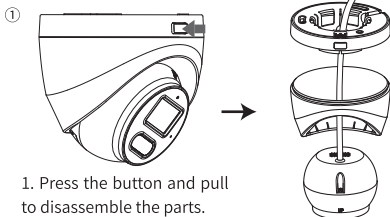


2. Thread the cable of the sphere through the bracket and secure it in the groove on the back of the bracket.
3. Install the bracket to the wall with screws. Put the FRONT logo up.

3. According to the order of "bracket-sphere-shell", insert the shell into the bracket.

Note: Please arrange the PoE port indoors or install  waterproof terminals to prevent water leakage at the connections and affect the normal use.

4. Product configuration

Scan QR code to download and install the Arenti APP. Also, you can search "Arenti" on App Store (iOS) or Google Play (Android).



4.1 Registration

Open the App. If you are a new user, tap to create a new account and follow the prompts to complete account setup.

Note: Please read and agree to the **Privacy Policy** and **Terms of Use** before creating your account.

Glad to meet you!

United States

+1 >

Account

abc@mail.com

Password

1234567890

☒ Remember password

[Forgot password?](#)

Log in

Sign Up

4.2 Pairing



- 1) Set up the parameters of router firstly and then record the SSID and password of your Wi-Fi network. Make sure the Wi-Fi network is stable and fluent.
2) Connect your smartphone to the Wi-Fi network.

- 1) Connect the camera to the router via the network cable.
2) The camera should be powered with a 12V DC adapter or a PoE powering device such as PoE router, PoE injector, PoE switch or Arenti NVR (not included in the package).

Note:

- The camera should be powered through a PoE network cable if it has only one network port and no power port.

- 3) Open APP home page, click "+" >> "Scan Code", then scan the QR code pasted on the device casing with the App of your phone, and add the camera to the App.

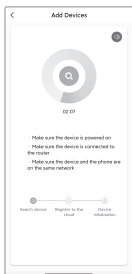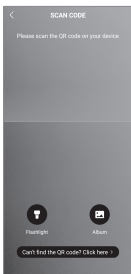

5. Specification

Product name	AIC-510B / AIC-520B	AIC-810W / AIC-820W
Resolution	2880 x 1600	3840 x 2144
Angle of view	110°	
IR Distance	Up to 10m	
Working temp	-20°C to 50°C	
Local storage	Micro SD card (up to 256GB)	
Input power	PoE; DC 12V/1A	
Consumption	Up to 5W	
Supported phone OS	iOS 9 / Android 5.0 or later version	

6. Legal notice

Support www.arenti.com

Symbols  Direct current (DC)



Don't throw batteries or out of order products with the household waste (garbage). The dangerous substances that they are likely to include may harm health or the environment. Make your retailer take back the products or use selective collect of garbage proposed by your city.

 Hereby, we declares that the radio equipment type 'AIC-510B', 'AIC-520B', 'AIC-810W', 'AIC-820W' is in compliance with the Directive 2014/53/EU
The full test of the EU declaration of conformity is available at the following Internet address:
www.arenti.com



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Safety Information

Power Adapter Safety:

1. The power plug is intended to serve as a disconnect device. Do not drop or cause an impact to the power adapter.
2. If the power cable is damaged (for example, the cord is exposed or broken), or the plug loosens, stop using it at once. Continued use may lead to electric shocks, short circuits, or fire.
3. Do not touch the device or the power adapter with wet hands. Doing so may lead to short circuits, malfunctions, or electric shocks.

Child's safety

1. Comply with all precautions with regard to child's safety. Letting children play with the device or its accessories may be dangerous.
2. The device and its accessories are not intended for use by children. Children should only use the device with adult supervision.

Operation safety

1. Use the device under allowed humidity and temperature conditions.
2. Do not aim the device at strong light sources (such as lamplight, and sunlight) when focusing it, to avoid reducing the lifespan of the CMOS sensor, and causing overbrightness and flickering.
3. Observe local laws and regulations, and respect the privacy and legal rights of others.

© 2023. All rights reserved. All trade names are registered trademarks of respective companies Apple, the Apple logo, iPhone are trademarks of Apple Inc. registered in the U.S. and other countries. Google, the Google logo, Android are trademarks of Google Inc. App Store is a service mark of Apple Inc. Google Play is a service mark of Google Inc.

V1.0 202309