

Marshall 8R Plus User Manual



Contents

Notice	3
Important Statement	4
General safety information	5
Product Introduction	6
Product Outlook	7
Product main components location	8
SIM / PASM / TF card Ports	9
Earphone jack /USB Type A /Type C	10
Power button/Volume buttons/Quick function button	11
Contact Card Reader	12
Contact-less card reader(NFC)	13
Barcode Scanner	14
Screen	15
Fingerprint Scanner	16
Camera	17
IRIS mouldle	18
Battery	19
Technical Specification	20
Operations	21
On/Off operation	21
Install /Remove SIM / TF Cards	22
Replace / Install battery	23
Charging device	24
Charging LED indicator behaviour	24
Cleaning device	25
Troubleshooting	26
FAQ	27

Notice

This user manual provides a summary of basic product specifications and features. before use for each product, please read this user manual carefully. Pay special attention and adhere to safety information in this manual.

Some of the instructions in this manual are based on the Android 13 operating platform. if you are using another Operating system, some operations may vary.

Do not touch the LCD panel with sharp or hard objects. Do not use abrasive cleaners, waxes or solvents

When cleaning, only use a dry or damp soft cloth. Use only specified batteries, power supplies and accessories by the manufacturer.

Due to our continuous research and improvement, the content in this catalog may change without notice.

The printed illustrations in this manual may differ from the actual product. This The functions and operations described in this guide are common to most (but not all) models.

This manual contains proprietary information protected by copyright. all rights reserved.

Aratek biometric company to be exempted liability for any loss or damage caused by the use (or misuse) of this product.

Important Statement

The following documents contain private information of Aratek Biometric Co., Ltd. (hereinafter referred to as ARATEK). This information is accurate and reliable, and is not allowed to be used or disclosed by third parties without the permission of the company's management. Any unauthorized copying, special conditions, limitations or modifications of this information with knowledge are infringing.

Aratek reserves the right to make changes, additions, deletions, improvements and any other changes to the company's products and services at any time without notice to any party. In the process of using the company's products, third parties shall not infringe any patents or other intellectual property rights..

Except for the Aratek logo design, all other trademarks or registered trademarks belong to their respective owners.

Contact US: <http://www.aratek.co/>

Address: 2F,T2-A #Building Software park, South Area, Hi-tech Park, Nanshan

District Shenzhen, Guangdong, China

Postcode: 518057

Telephone: 0755-26719975

General safety information

Use the following safety guidelines to help protect your equipment from potential damage, in addition to observing and heeding any other precautions and safety warnings in this manual.



WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO EXTREME HEAT, RAIN OR MOISTURE.

Make sure the power cord is unplugged from the outlet during thunderstorms or when it is not in use for a long time. Do not open the device or remove any internal parts. If service is required, please contact qualified personnel. Please observe all handling precautions when using this product.

Operating Environment

Remember to follow any special regulations enforced in any area, and always switch your device off whenever it is forbidden to use it, or when it may cause interference or danger. Do not use your device in restricted areas. Switch your device off in any facility where posted notices require you to do so. When connecting the device or any accessory to another device, read the user's guide for detailed safety instructions. Do not connect incompatible products.

Cautions

Any changes or modifications to Marshall 8R plus equipment not expressly approved in this document could void your warranty on this product and void your authority to operate this equipment. Although your device is very solid, it is a complex device and can be damaged. Avoid dropping, bumping, bending or sitting on it. Keep your device away from any liquids. Precipitation, moisture, and liquids contain minerals that corrode electronic circuits.

Other Important Safety Information

Only qualified personnel should service this equipment. Defective service may be dangerous and may void any warranty applicable to the device. When transporting the device in a moving vehicle, make sure that any electronic or related equipment used in the vehicle is securely installed. Turn off your device before boarding the plane. The use of wireless mobile devices on board an aircraft is illegal and may be dangerous to the operation of the aircraft. Keep the device and all its parts out of the reach of children.

Product Introduction

Powerful. Packed with Features. The ARATEK Marshall 8R plus ushers in a new age in biometric identification and authentication. From fingerprint to facial recognition, barcode to contact and contact-less card reading with tamper-protection, all the way to a large 8- inch display, ARATEK Marshall 8R plus integrates everything needed to get the job done.

Extremely sturdy, the IP65 rated ARATEK Marshall 8R plus enables users to securely manage enrollments and is suited for national ID, voter registration, SIM card activation, border control, law enforcement, financial services, and census campaigns. The ARATEK Marshall 8R plus has got everything covered.

Key feature

- FAB 60 FBI-Approved Fingerprint Scanner
- Removable Long-Life Battery
- Mobile 4G, Wi-Fi, Bluetooth & GPS Connectivity
- Contact-less card reader(NFC)
- Contact Smart Card-Reader
- 1D/2D Barcode Scanner
- Android 13 OS or above
- Memory: 4GB RAM & 64GB ROM
- 8" Scratch Resistant Touch Screen
- Dual SIM Ports
- TF card Port, PSAM card Port, Earphone jack port.

Purpose of this user manual

This manual has been designed to introduce the user to the device features and components to be used as a step-by-step guide to achieve optimal device performance. The manual is intended to inform the user about proper operating procedures and provide relevant technical information related to the device.

Warranty

The standard warranty period for the hardware and parts, as well as workmanship is 12 (twelve) months.

Packaging

Marshall 8R plus device is neatly and securely packaged inside a custom EVA hard shell box.


Product Outlook

Product View:



Dimensions (L*W*H): 286*239*28.5 mm Weight: 1.3 kg

Product main components location

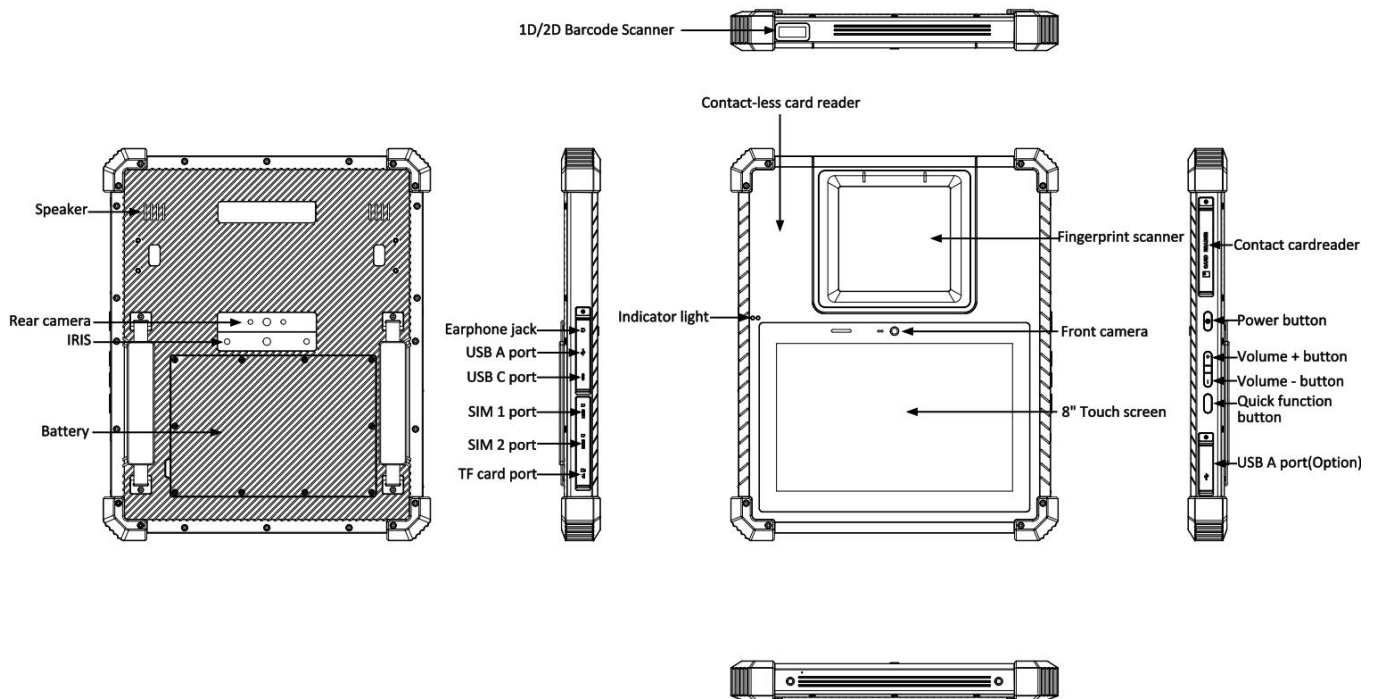


Please note that if the Iris and the right side USB A port cant not exist at same time.

SIM / PASM / TF card Ports

The SIM /TF card panel can only be accessed with the left side ports under rubber cover. Open the rubber cover to insert cards to the device.

The PASM card ports are under the battery(not showed in the below image).

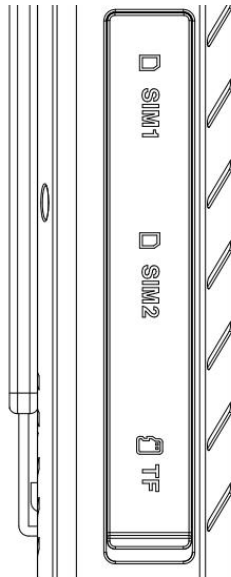

Insert T-Flash card (micro SD) memory card into slot in correct orientation as shown above. The device can accommodate a TF card with memory of up to 256GB.

Insert the 2 x micro SIM (Subscriber Identity Module) cards into slots in correct orientation as shown above.

Insert the 1x PSAM (Purchase Security Application Module) cards into the slot under battery socket.

Earphone jack /USB Type A /Type C

Ear phone jack Port


Ear phone jack port is allowed user to insert headphone sets while listening the instructions to do the voting process.

USB type A Port

USB type A is a specification that allows USB devices, such as tablets or, to act as a host, allowing other USB devices, such as USB flash drives, digital cameras, mice or keyboards, to be attached to them.

USB type C Port

This USB type C port is a specification that allows Marshall 8R plus connected with PC and another host device to do data transfer, such as firmware upgrade, file transfer and more.

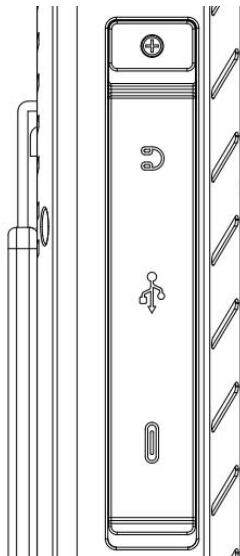

Power button/Volume buttons/Quick function button

Power button


Power button is allowed user to turn on and shut down the device.

Volume buttons

Volume buttons are allowed user to adjustment device volume from low to loud.

Quick function button

Quick function button is a customize button that allowed user to set this button as a shortcut function button, the default function of this button is used as “return” function.

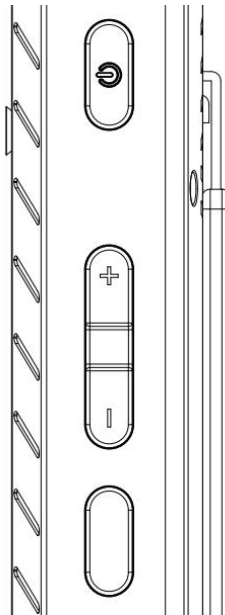


Contact Card Reader

Contact Card Reader is on the right-side of Marshall 8R plus.

Always make sure that the smart chip on your card is facing you (visible to you) when you inserting to the slot.

Always insert smart chip side first (as indicated with arrow direction). See the picture below.

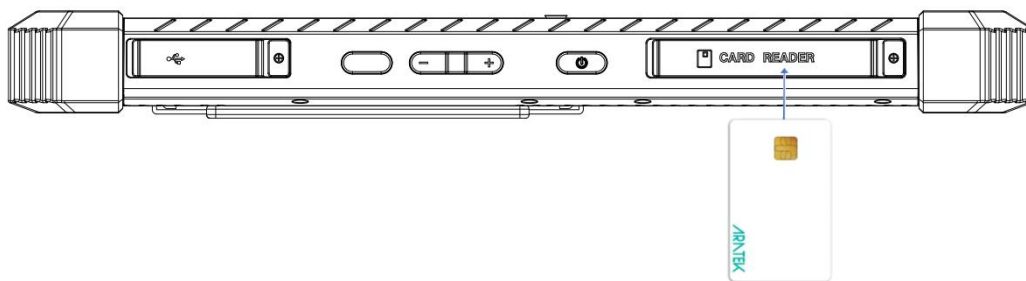


Smart chip face up!

Contact-less card reader(NFC)


Near field communication (also known as NFC) enables two electronic devices to communicate with each other. For example, a NFC card and a card reader will engage with each other, with a read range of around 4cm offering more flexibility in the field than a contact card. The NFC contact area is in the device upper center.

Contact-less card reader(NFC)

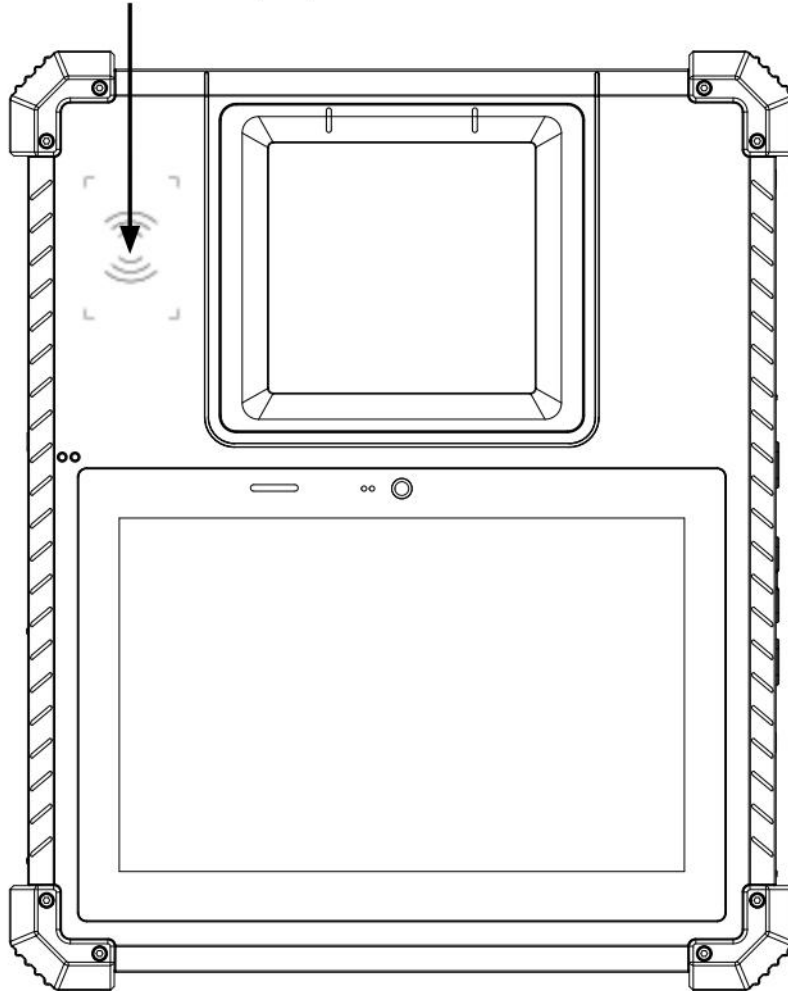

Barcode Scanner

The barcode scanner is a sub-miniature area image engine optimized for barcode reading. The engine captures digital images of a barcode for transmission to a decoder to decode a 1D or 2D barcode of any format supported by the decoding software. The scanner includes an LED illumination system. Please select your preferred image capture preferences and parameters.




Barcode Scanner



PDF417

Screen


The Marshall 8R plus display panel with high brightness and high contrast is visible under strong sunlight or outdoor environments. Avoid direct sunlight when possible to avoid overheating. Your tablet screen is tough and scratch resistant, but direct impact of sharp objects and abrasive materials could cause damage and leave marks. Always handle with care.

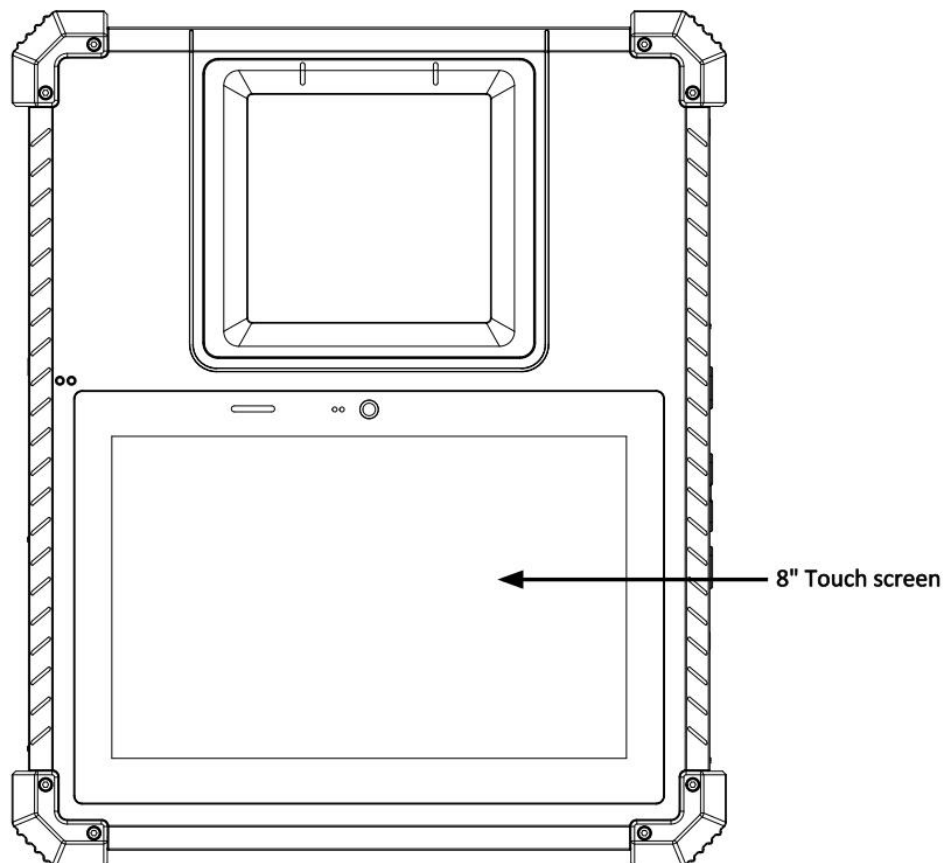

Keep your tablet display clean by using a soft, lint-free cloth. Use a damp microfiber cloth to take care of fingerprints, grime, and stubborn stains. Once all the stains are removed, wipe the screen again with a dry microfiber cloth. Always turn your device off before cleaning it. Never spray or drip cleaning liquid directly on screen. Never use harsh chemicals. Never use abrasive cloths or paper towels. Use a cotton swab to pick up dust and grime from the rim of your Marshall 8R plus screen.

Fingerprint Scanner


The Marshall 8R plus can accommodate a FAP60 optical fingerprint scanner. Each fingerprint scanner is FBI certified to ensure fast high quality image capture. The fingerprint sensor is software activated. Simply push down finger on the capture window. Do not use excessive force. Always keep the capture window clean.

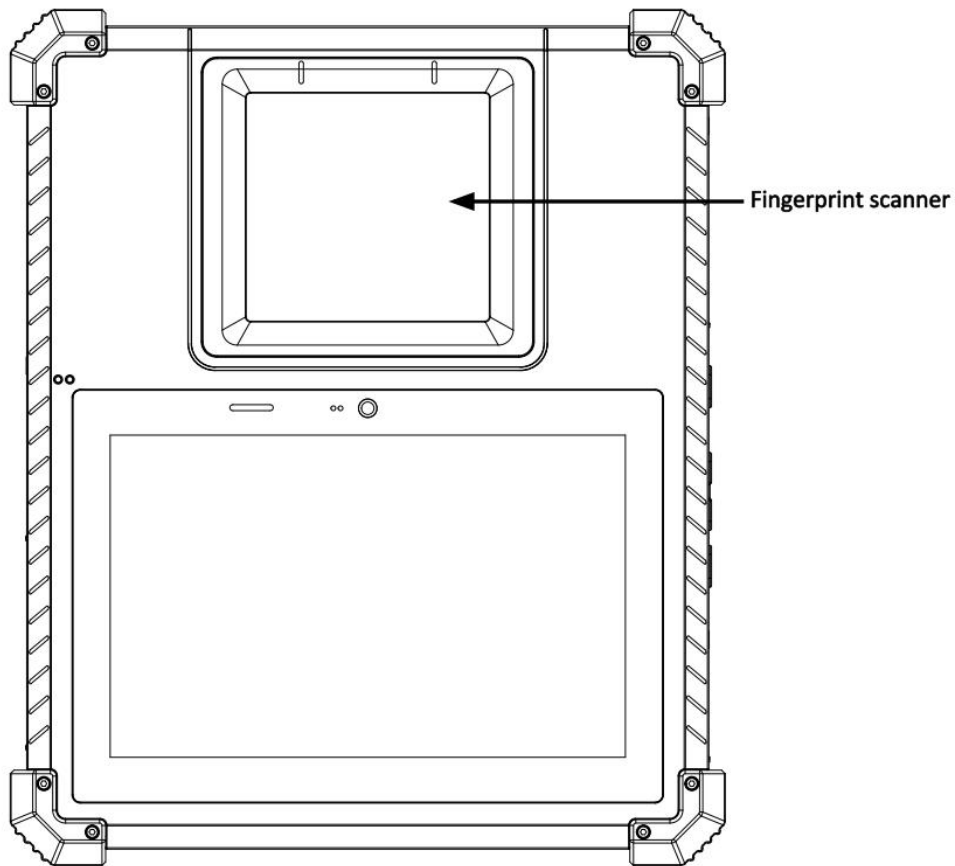

Fingerprint Scanner


Camera

The Marshall 8R plus is equipped with a front camera and a rear camera. The front camera is 8MP fixed focus, and the rear camera is 13MP autofocus with two LED flashes. The high-definition image quality provides customers with a good photo-taking experience and also enables the Marshall 8R plus to perform excellently in face recognition.

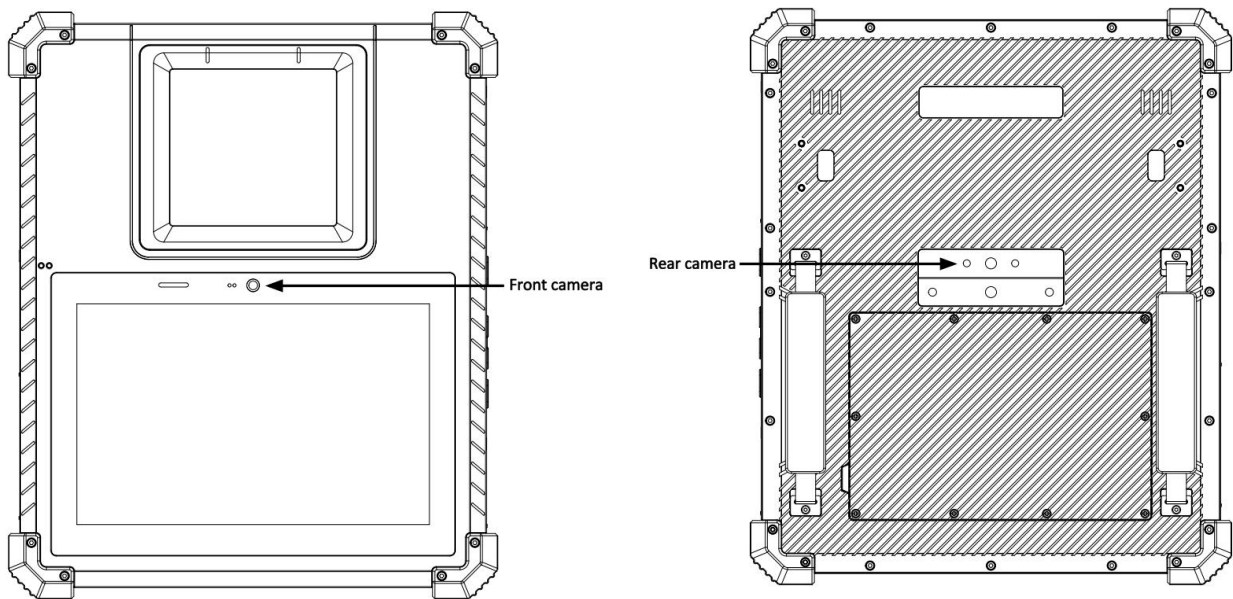

IRIS module

The Marshall 8R plus is equipped with binocular IRIS module, and optimal acquisition distance is 27 cm.

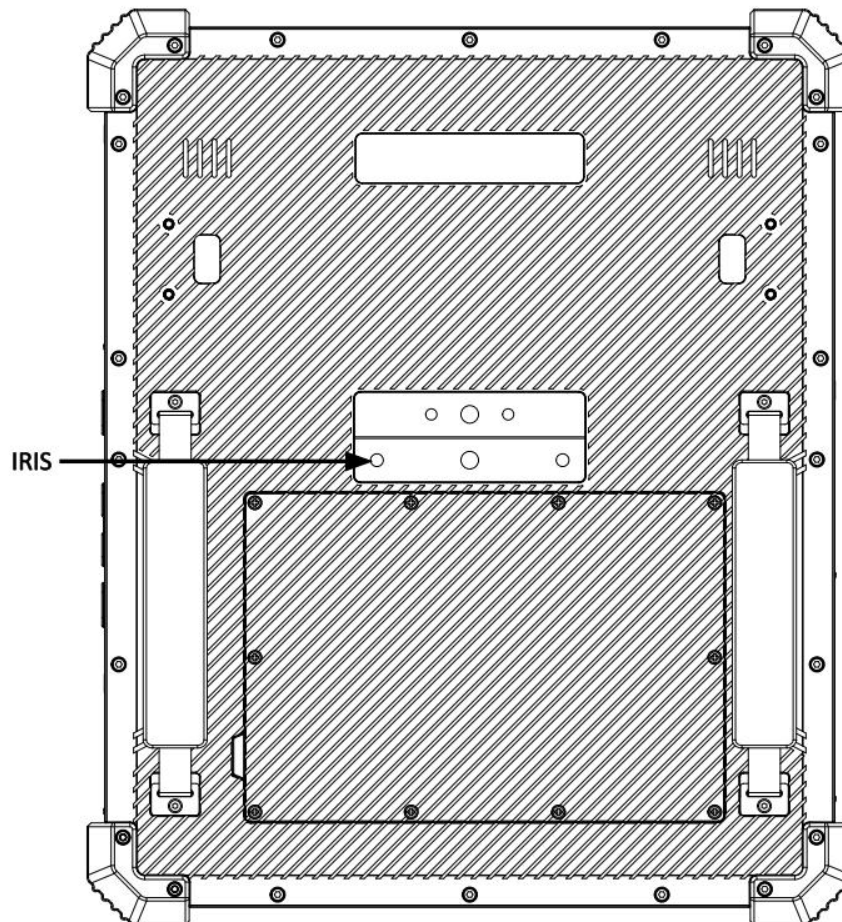

Battery

The Marshall 8R plus battery is a 10000mah removable Li-Polymer battery.



General battery safety information:

Only use the specified battery and power supply provided. Use of any other batteries or power supplies may result in fire, or damage to the device, battery, or operator. If the tablet is going to be stored for more than three months, remove the battery from the device to avoid battery damage or self-discharge. Do not disassemble the battery pack. There are no user-serviceable parts inside. Doing so may present risk of exposure to harmful chemicals, explosion or fire.

Contact your local waste disposal service provider regarding the disposal or recycling of used batteries. Please adhere to local laws and regulations when it comes to recycling the battery.


Technical Specification

Key Parts	Specification
Operating System	Android 13 or above
Processor	Octa (8) Core, 2.0GHz
Memory (RAM+ROM)	DDR4, 4G+64G (Optional 6G+128G, 8G+256G)
Touch Screen	8 Inch capacitive touch screen ,scratch resistant
LCD screen	1280*800 Pixels 8 inch IPS
Rear Camera	13MP AF + LED Flash
Front Camera	8MP FF
USB Ports	USB type C*1, USB2.0 type A*1+USB 2.0 type A*1(optional),
Battery	10000 mAh 3.7v* 1pcs, removable
RTC	Support
2G	850&900&1800&1900
3G	B1&B2&B5&B8
4G	LTE FDD:B1/B2/B3/B4/B5/B7/B8/B20/B28
SIM Card	Micro SIM Card *2
PSAM	PSAM*1
Location	GPS + GLONASS + Galileo + Beidou
WI-FI	IEEE 802.11 a/b/g/n/ac
Bluetooth	Bluetooth 5.0
Fingerprint	FAB 60 FBI-Approved, 4-4-2 fingerprint sensor, Aratek A910
IRIS	Dual iris capture
Barcode	1D, 2D, PDF417, QR code, Code 39, Code 128, MRZ/OCR DataMatrix, UPC-A, etc.
Contact card reader	ISO 7816 Parts 1-3, Class A, B, C (5V, 3V, 1.8V), Support Micro Processor cards with T=0, T=1
Contactless card reader(NFC)	ISO 14443A/B, ISO15693
Weight	1.3 kg
Dimension (L*W*H)	286*239*28.5 mm
Certification	CE, FCC, RoHS, UN38.3
Charger	Input: 100-240V, 50/60hz; Output: 9V/2A, Fast charging ability
USB cable	USB Type C cable

Operations

On/Off operation


Long Press the power button two seconds to do on/off operation.

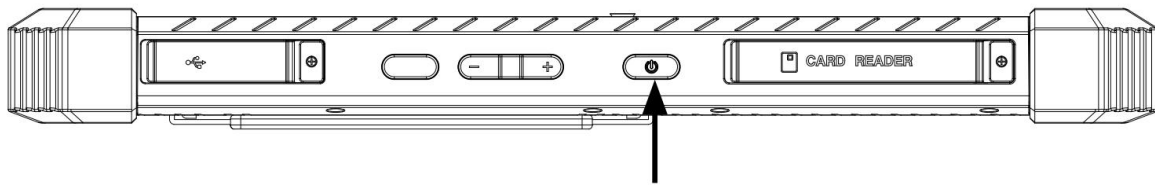

Long press power button for two seconds to do on/off operation.

Install /Remove SIM / TF Cards

Open the rubber rover to insert the SIM card with the right direction. There are two SIM slots, you can insert a maximum of two sim cards. Ensure the device is turned OFF before inserting or removing a SIM card.

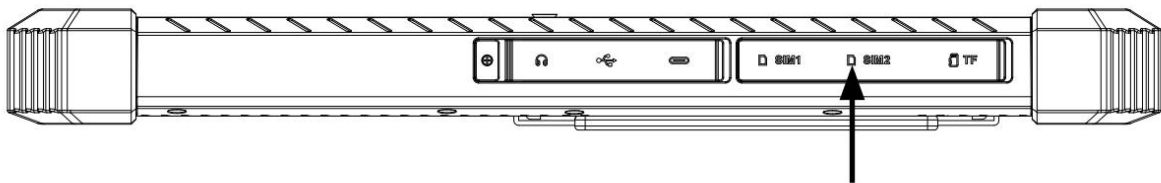

Open the rubber cover and insert the SIM card with right direction(follow the icon).



The icon on rubber cover

Replace / Install battery


- Use a Phillips screwdriver;
- Loosen below six screws;
- Open the battery cover through the slot ;
- Remove the battery;



WARNING: Using an incompatible battery increases the risk of fire or explosion. Replace the battery only with a compatible battery purchased from the manufacturer. The battery is designed to work with your Marshall 8R plus device. Do not use a battery from any other device.



WARNING: Before removing or replacing the battery, turn off the device, disconnect the AC adapter from the electrical outlet and remove any other external cables from the device. WARNING: Not for use in hazardous locations

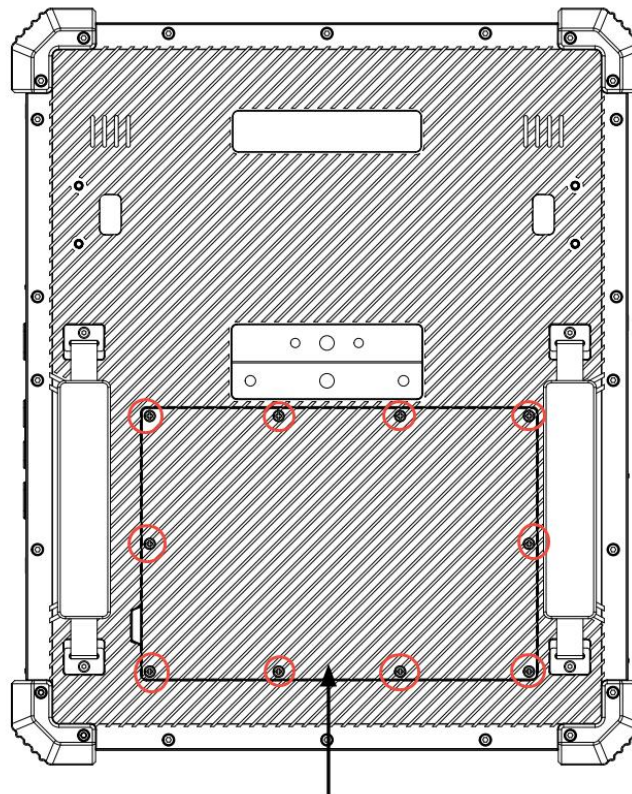

Loose these 10 screws to open the battery cover.

Conditioning a new battery

Before you use a new battery for the first time, below conditioning process is suggested :


1. Connect the AC adapter and fully charge the battery.
2. Turn on the device and complete setting up the operating system.
3. Disconnect the AC adapter.
4. Operate the device using battery power.
5. Reconnect the AC adapter and fully charge the battery again.
6. Follow these steps again until the battery has been charged and discharged three times.

Use this conditioning process for all new batteries, or if a battery hasn't been used for a long time.

The battery conditioning process ensures your battery accepts the maximum possible charge. Failure to follow this procedure will prevent you from obtaining the maximum battery charge, and will also shorten the effective lifespan of the battery.

Charging device

- Open the first rubber cover on the left side of the device. Find type C, the Type C USB port is used to charge the battery
- When charge the device, plug in the USB cable in the device and the power adaptor.

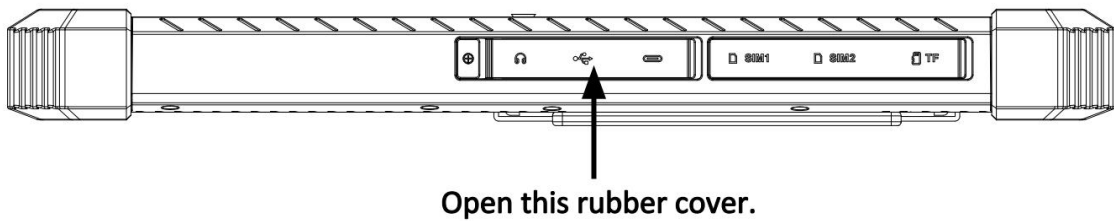

Charging LED indicator behaviour

Red light when power charging is less than 95%;

Green light when power charging is greater than or equal to 95%.

Cleaning device

Turn off your device. Disconnect any attached devices, headphones, speakers, and keyboard dock from the tablet and from their electrical outlets.

Use a soft microfiber cloth moistened with water or a non-alkaline detergent to wipe the exterior of the tablet. Do not allow water from the cloth to seep down to the tablet ports when covers are open.

Gently wipe the display with a soft, lint-free microfiber cloth. Do not use alcohol or detergent on the display.

Troubleshooting

Problem 1: Charge failure

Solution: Check if the plug is inserted correctly, ensure that USB type C port has good contact.

Problem 2: Heating

Solution: Avoid using the device under too hot environment. Stop device operation for a while.

Problem 3: Crash

Solution:

- a. Long press power button to turn off, then turn on.
- b. Press reset button to restart device.
- c. Contact Aratek support team.

Problem 4: Other problems

Solution: Contact Aratek for support, website: www.aratek.co

FAQ

1. How to enable USB device mode?

Go to: **Settings---Connected Devices** menu, then manually enable **USB Device Mode** option.

2. Why I can't use fingerprint after I transfer files between device and PC?

- 1). When you copy the files between the device and the PC, you need to enable the **USB device mode**.
- 2). After file transfer, you have to disable the **USB device mode** unless your fingerprint can't work..
- 3). Go to: **Settings---Connected Devices--- USB Device Mode** to disable the USB device mode

3. How to transfer files between Marshall 8R plus and PC, why Marshall 8R plus can't be found in my PC?

Please follow below steps:

- 1). Enable **USB device mode**.
- 2). Connect a PC by a USB type C cable.
- 3). Click and open the notification message(**Android system.Charging this device via USB**).
- 4). Choose **file transfer** by this path: **Settings---Connected Devices---USB Preferences**.
- 5). Open your PC, you can find Marshall 8R plus is in your PC and you can transfer file between Marshall 8R plus and your PC.
- 6). After file transfer, unplug the type C cable and disable the **USB device mode**.



4. Is there a way we could do to debug from PC while keeping the fingerprint on?

Please use **WI-FI-debugging**. Detailed steps were shown in Q5.

5. Why and how to do Wi-Fi Debug?

Due to one USB port design in motherboard, fingerprint and TYPE C port cannot be used at the same time.

Steps for Wi-Fi debug:

- 1) Turn on Android device USB Debugging and enable USB device mode , then connect device with PC.
- 2) Turn on Wi-Fi and connect the device to local area network, make sure your Android device and PC can communicate with each other in local area network.
- 3) Open command line and enter command like below:

adb tcpip 5555

adb shell netcfg

- 4) Find your Android device IP address, (such as **192.168.XXX.XXX**), then disconnect the device, and enter command on PC:

adb connect 192.168.xxx.xxx

- 5) Disable the USB device mode (in **Settings---Connected Devices---USB Device Mode**).
- 6) Then, you can debug through Wi-Fi.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.