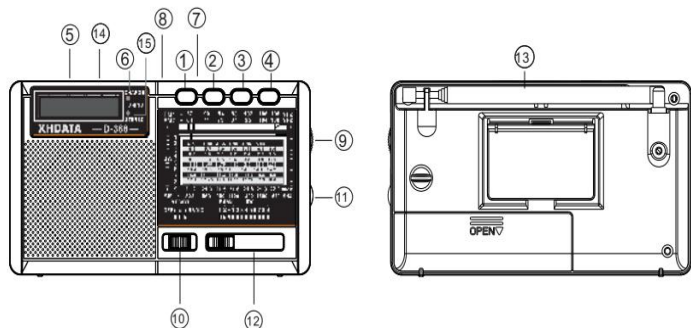


XHDATA**—D-368—****USER MANUAL**

AM/FM/SW 12 BANDS STEREO RADIO
USB/TF/ MP3 AND WIRELESS BT PLAY

**Function button description**

- | | |
|---------------------------------|---------------------------|
| 1. Mode switch | 9. Radio tuning button |
| 2. Previous key | 10. Power/function switch |
| 3. Play /pause key | 11. Volume button |
| 4. Next key | 12. Radio band button |
| 5. DC 5V Input socket | 13. Antenna |
| 6. Charging LED /
Tuning led | 14. Stereo headphone jack |
| 7. TF card socket | 15. Stereo led |
| 8. USB socket | |

Radio function operation

- Turn on the power switch ⑩ to the radio gear and adjust the right volume.
- Push the function switch ⑫ to your favorite band.
- When listening to FM or SW band, please pull out the rod antenna and adjust it to the best receiving angle ⑬. When listening to AM band, please rotate the body to adjust to the best receiving angle.
- Turn the tuning button ⑨ slowly to select the radio station.

FM stereo operation

- Plug in stereo headphones during FM radio. When the stereo light is on, you can enjoy stereo music

USB/TF MP3 playing function

- Turn on the power ⑩ switch to MP3 and adjust the right volume.
- Insert the USB or TF card into the corresponding socket ⑦ ⑧
- Short press the previous ② or next ④ button to select the previous or next song. Long press these two buttons for fast reverse or fast forward function.
- Short press ③ to pause. Press again to resume playback.
- Long press the play key for 3 seconds, and when "one" is displayed, it is in single play status. Long press again, and "all" is displayed in all play status.
- Long press ① is Bluetooth, short press in order to play Bluetooth /USB.

Wireless BT play function

- Turn on the power ⑩ switch to MP3 and adjust the right volume.
- When the USB or TF card is not plugged in, the machine will play Bluetooth connection by default.
- Turn on the Bluetooth connection of mobile phone "D-368"
- Short press the previous ② or next ④ button to select the previous or next song.
- Long press the "play" key ⑦ for 3 seconds to forcibly disconnect the currently connected device, and then press it again to restore the connection.

Charging function operation

- Plug the charging cable into the "DC5V in" ⑤ charging port and the other end into the 5V USB out put port of the mobile phone adapter.
- When the battery is fully charged, the LED is off.

SPECIFICATIONS

FM1:87-108MHZ SW1-9:4.75-22.0MHZ
 FM2:64-108MHZ DC IN:5V ≥ 1000mA
 AM:522-1620KHZ DC :3.7V (18650)

Skype:radiwow
 Email:xhdatacn@gmail.com
 Facebook:XHDATA
<https://www.xhdata.com.cn>
 Whatsapp:+86 18025193267

FC CE RoHS MADE IN CHINA