


Quick Installation Guide

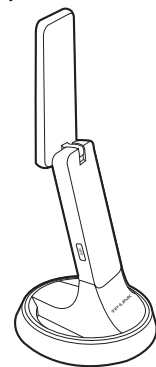

For Mac OS X

AC1300 High Gain
Wireless Dual Band USB Adapter


MODEL NO. Archer T4UH

118 REV3.1.0




1 Connect to a Computer

Option 1: Directly

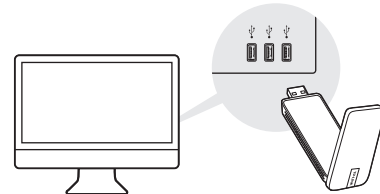

Option 2: Via the USB Cradle




2 Install Driver and Utility

a. Insert the CD.

Note:
You can also download the driver and utility at
www.tp-link.com.

b. Browse the CD, go to **Archer T4UH > Mac OS X Driver**, unzip the **Mac OS X version.zip** file and run the Installer.


c. Follow the wizard to complete the installation.

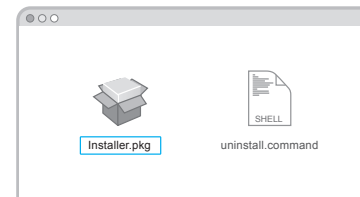

3 Join a Wireless Network


Option 1: Via TP-LINK Utility

- Click  (TP-LINK Wireless Configuration Utility) on the menu bar.
- Select your Wi-Fi network and enter the Wi-Fi password when prompted.

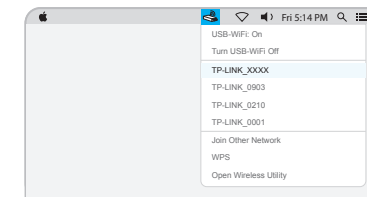

Option 2: Via Wi-Fi Protected Setup (WPS)

- Press the WPS button on your router.
- Within 2 minutes, press and hold the WPS button on the adapter until WPS Progress screen appears.




- When you are prompted "WPS Protocol Finished!", click **OK**.



For Windows


1 Connect to a Computer

Option 1: Directly

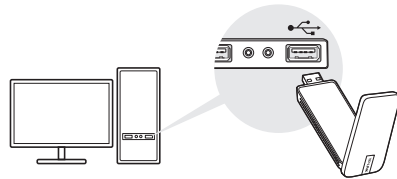

Note:
In Windows XP, a **Found New Hardware Wizard** window will appear when the adapter is detected. Please click **Cancel**.

Option 2: Via the USB Cradle




2 Install Driver

a. Insert the CD and run the **Autorun.exe** from the pop-up Autoplay window.

Notes:
1. You can also download the driver at www.tp-link.com.
2. In some operating systems, the CD screen will pop up automatically. Otherwise, run the CD manually.

b. Select **Archer T4UH** and click **Install Driver**, then follow the InstallShield Wizard to complete the installation.

Note:
During the installation, select **TP-LINK Wireless Configuration Utility and Driver** if you want to use TP-LINK Utility and WPS function.

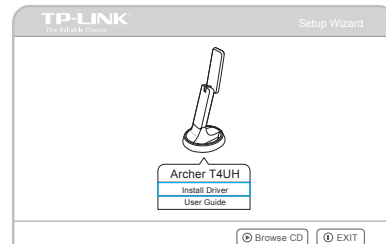


3 Join a Wireless Network

Option 1: Via Windows Wireless Utility



Click or (Network icon) on the taskbar, select your Wi-Fi network, and click **Connect**.

Note:
In Windows XP, if you have installed TP-LINK Utility, you need to switch to Windows wireless configuration tool first.

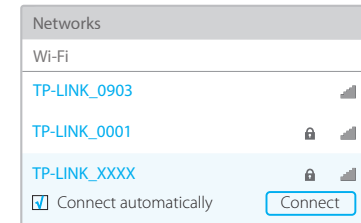

Option 2: Via TP-LINK Utility


Select your Wi-Fi network from the pop-up utility window and click **Connect**. The symbol indicates a successful connection.

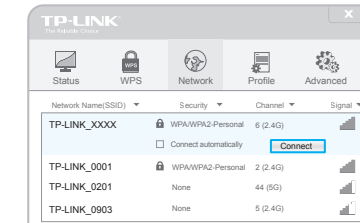

Option 3: Via Wi-Fi Protected Setup (WPS)

a. Press the WPS button on your router.

b. Within 2 minutes, press and hold the WPS button on the adapter until the configuring screen appears.



c. When you are prompted "Successfully connected to the network by WPS!", click **OK**.



For more information, please visit our website

www.tp-link.com

©2017 TP-LINK

This USB Adapter can only be powered by computers that comply with

Power Source (LPS).

