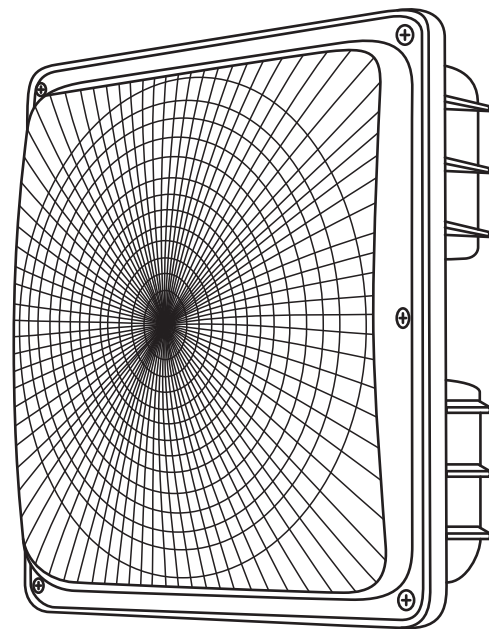


CINOTON

LED CANOPY LIGHT

User Manual



CINOTON Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting that make it easy for electricians to install and help users to save energy.

cinoton.service@gmail.com

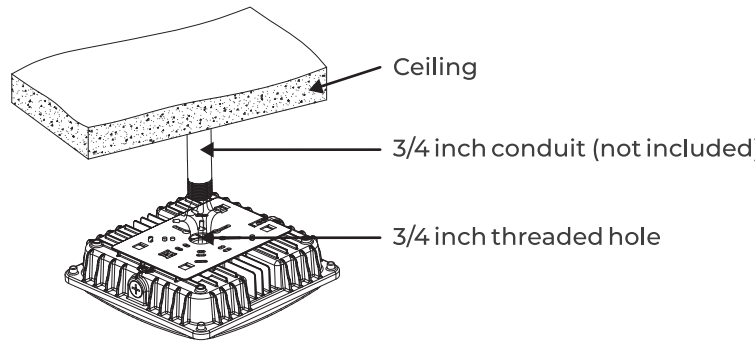


⚠ WARNING

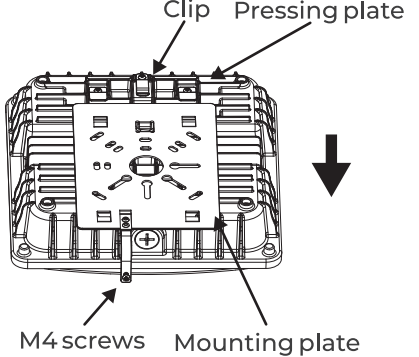
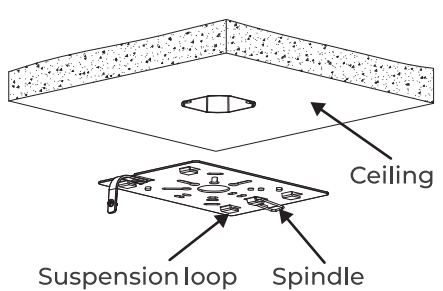
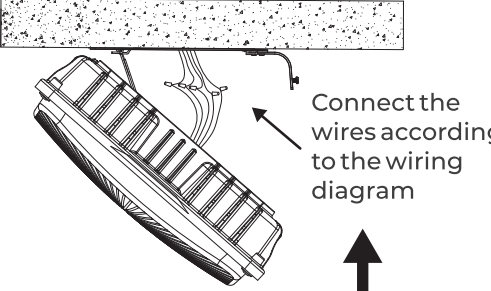
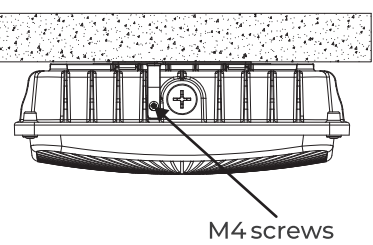
- PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION**
- To prevent personal injury or product damage only licensed electricians should install.
 - To avoid electric shock or component damage disconnect power before attempting installation or servicing.
 - This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards. Disconnect product and allow cooling prior to servicing.
 - Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction. To prevent product malfunction and/or electrical shock this product must be properly grounded.
 - This luminaire is designed to operate in ambient temperatures ranging from -40°C to 40°C and to be horizontally mounted with the LEDs facing down. This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

PENDENT WITH 3/4 INCH CONDUIT (OPTIONAL)

- Connect the line voltage to the wires coming out from the fixture following the wiring diagram.
- Screw the fixture to the 3/4 inch conduit to complete the installation.



SURFACE MOUNTED WITH J-BOX (DEFAULT)

- 1 Loosen and remove the side M4 screws which used to fix the mounting plate.

- 2 Loosen and remove the side M4 screws which used to fix the mounting plate.

- 3 Connect the clip on the fixture to the spindle of the mounting plate to make sure the fixture will not slip and fall. Connect the line voltage to the wires coming out from the fixture following the wiring diagram. Push the pressing plate into the suspension loop on the mounting plate.

- 4 Lock the M4 screws to complete the installation.


WIRE CONNECTION

Black	○	Live
White	○	Neutral
Green/Yellow Green	○	Ground

Universal voltage driver permits operation at 100V to 277V, 50 or 60 Hz.

CLEANING & MAINTENANCE

1. Clean polycarbonate lens with non-abrasive glass cleaning solution.
2. Do not open the fixture to clean the LED. Do not touch the LED.
3. It is recommended to wear gloves to avoid injury during installation.
4. If any smoke or spark, please turn off the power immediately.

TROUBLE SHOOTING

- Q: Can I install a motion sensor on this lights?**
A: Yes, You can screw in a 120V AC Motion Sensor detector into the side port of the fixture.
- Q: What size threaded holes are on the back?**
A: 3/4 inch threaded hole.
- Q: Is this light dimmable?**
A: This light is not dimmable, thanks.