



## Multi-Devices Connection Wireless Keyboard

IC-BK10

### User Manual

Thank you for choosing iClever! Please read this user manual carefully and save it for future reference.

#### Package Contents

- 1 x Wireless Keyboard
- 1 x Micro USB Charging Cable
- 1 x Keyboard Cover
- 1 x User Manual


#### Specifications

Bluetooth Specification	Bluetooth 5.1
Dimensions	366x125x16.2mm
Operating Range	<10 meters
Stand-by Time	90 days
Charge Time	< 2 hours
Uninterrupted Work Time	90 hours
Lithium Battery Capacity	280 mAh
Lithium Battery Life	3 years
Key Life	3 million clicks
Front Side of Keyboard	ABS
Back Side of Keyboard	Stainless steel

\*Frequency band: 2402MHz – 2480MHz  
\*Maximum transmission power: 0 dBm

- 1 -

#### Product Overview

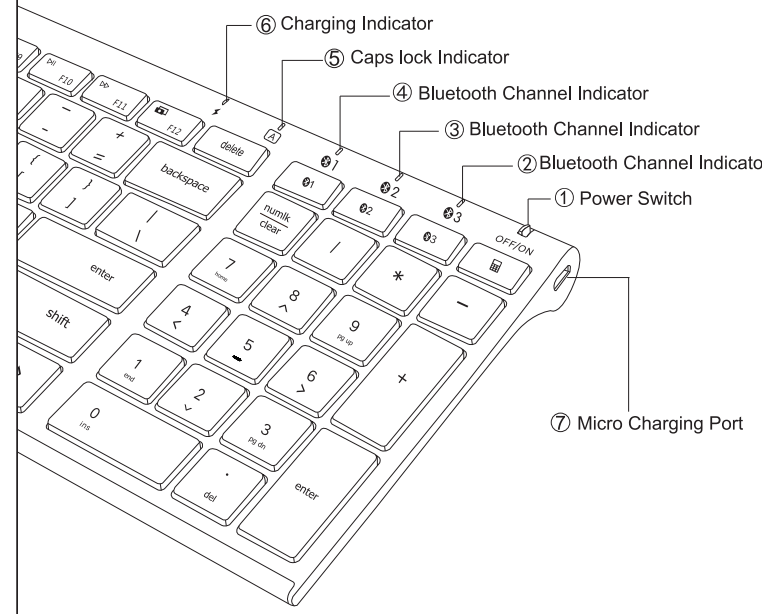

- Power Switch: slide right to turn on and left to turn off.
- 3.4. Bluetooth Channel Indicator: to indicate the Bluetooth channel 1/2/3 status.
- Caps Lock Indicator: press the "caps lock" key to switch between uppercase and lowercase, and the indicator will light up when you switch to uppercase.
- Charging Indicator: it stays red when charging, and turns green when fully charged.
- Micro Charging Port: for charging.

- 2 -

#### Keys and Functions

The table below describes special key combinations for different operating systems.

Function Keys	IOS	Android	Windows	Mac OS	Windows
	Brightness -	Brightness -	Brightness - (Windows 10)	Brightness -	F1
	Brightness +	Brightness +	Brightness+ (Windows 10)	Brightness +	F2
	Home	Home or N/A	Web browser	Mission control	F3
	Switch apps	N/A	Switch apps	Switch apps	F4
	Search in browser or N/A		Search	Search	F5
	Previous track	Previous track	Previous track	Previous track	F6
	Play/pause	Play/pause	Play/pause	Play/pause	F7
	Next track	Next track	Next track	Next track	F8
	Mute	Mute	Mute	Mute	F9
	Volume -	Volume -	Volume -	Volume -	F10
	Volume +	Volume +	Volume +	Volume +	F11
	Screenshot	Screenshot	Screenshot	Screenshot	F12

- 3 -

Special Key	IOS	Android	Windows	Mac OS
	Press "fn" + "esc" keys to turn on/off fn lock function. For IOS and Mac users, your keyboard has by default access to the Media and Hotkeys such as Volume Down, Volume Up, Play/Pause, and so on. If you prefer to have direct access to your F-keys simply press "fn" + "esc" keys on your keyboard to swap them.			
	The "fn" key is used in combination with other keys to access special features.			
	Switch function: press this key switching to Bluetooth Channel 1. Pairing function: hold and press it for 5 seconds, the Bluetooth Channel 1 indicator will flash blue to pairing mode.			
	Switch function: press this key switching to Bluetooth Channel 2. Pairing function: hold and press it for 5 seconds, the Bluetooth Channel 2 indicator will flash blue to pairing mode.			
	Switch function: press this key switching to Bluetooth Channel 3. Pairing function: hold and press it for 5 seconds, the Bluetooth Channel 3 indicator will flash blue quickly to pairing mode.			
	It works as calculator function when your system is Windows. <b>NOTE: works for Windows only.</b>			
	It works as "win" when your system is Windows or Android. It works as "option" when your system is IOS or Mac OS.			
	It works as "alt" when your system is Windows or Android. It works as "command" when your system is IOS or Mac OS.			
	It works as "ctrl" when your system is Windows or Android. It works as "option" when your system is IOS or Mac OS.			
	It works as "Number lock" when your system is Windows and Android. It works as "Clear" when your system is Mac OS. <b>NOTE: not works for IOS.</b>			

- 4 -

#### Pairing Instruction

##### A. How to pair with Bluetooth devices?

###### Pair with 1st device

- Slide right to power on the keyboard.
- Hold and press the key of for 5 seconds to pairing mode in channel 1; the Bluetooth channel indicator will flash blue and start to search for the available Bluetooth device.
- On your Bluetooth device, find the Bluetooth name "iClever IC-BK10 Keyboard" and click to connect it.  
*For example, for iPad, click "Settings" > "Bluetooth" > under "MY DEVICES" to find pairing name and click to connect it.*

- The status indicator will turn to be blue after successfully paired.

###### Pair with 2nd device

- Hold and press the key of for 5 seconds to pairing mode in channel 2; the Bluetooth channel indicator will flash blue and start to search for the available Bluetooth device.
- On your Bluetooth device, find the Bluetooth name "iClever IC-BK10 Keyboard" and click to connect it.
- The status indicator will turn to be blue after successfully paired.

###### Pair with 3rd device

- Hold and press the key of for 5 seconds to pairing mode in channel 3; the Bluetooth channel indicator will flash blue and start to search for the available Bluetooth device.
- On your Bluetooth device, find the Bluetooth name "iClever IC-BK10 Keyboard" and click to connect it.
- The status indicator will turn to be blue after successfully paired.

- 5 -

#### If fail to connect, please try as below:

- Delete the connection records with iClever keyboard.  
*For example, for iPad, click "Settings" > "Bluetooth" > under "MY DEVICE" to delete the iClever keyboard name.*
- Turn off the Bluetooth and turn it on again to Refresh.
- Turn off the Bluetooth and turn it on again to Refresh.  
*For example, for iPad, click "Settings" > "Bluetooth" > if the on-screen switch beside Bluetooth currently show as ON, tap it twice to refresh it.*
- Connect it again.

#### Notes:

- Auto re-connect function: the keyboard will connect with the last-used device automatically.
- Do not connect it via a Bluetooth adapter.

#### B. How to switch among the connected devices?

Press key of , , to switch among the connected devices.

#### C. How to re-pair?

- Press key of , , to choose the channel 1/2/3 you want to re-pair.
- Hold and press key of , , for 5 seconds to re-pair **AGAIN**.
- On your Bluetooth device, find the Bluetooth name "iClever IC-BK10 Keyboard" and click to connect it.
- The status indicator will turn to be blue after successfully paired.

- 6 -

#### System Requirements

- IOS 13.0 or later
- macOS 10.10 or later
- Windows 8 or later with Bluetooth HID Profile
- Android 6.0 or later with Bluetooth HID Profile

**NOTE:**  
**It is not fully compatible with Windows 7 PC/laptop, Bluetooth Adapter, Mac mini, Samsung Smart TV and Nokia phones.**

#### Power Saving Mode

The keyboard will enter sleep mode after 30 minutes of inactivity. To activate it, press any key and wait for 3 seconds.

**Note: The first 3 seconds after the keyboard wakes up, there may be a delay in typing.**

#### Charge the Keyboard

Charge the device with the included USB cable.  
(Output: DC 5V/200mA; **USB charger is not included.**)

#### Tips

Keep away from oil, chemical, liquid, and snacks.  
Keep away from sharp objects.  
Keep away from metal and other sources of wireless signal.

#### Contact

Email: support@iclever.com

- 7 -

#### FAQ

##### Q: My Bluetooth device frequently gets disconnected or laggy.

- Make sure that Bluetooth is ON or enabled on your computer.
- Make sure your iClever product is ON.
- Make sure that your iClever device and computer are within close proximity of each other.
- Charge the keyboard for 30 minutes.
- Try moving away from:
  - Any device that could emit wireless waves: Microwave, cordless phone, baby monitor, wireless speaker, garage door opener, WiFi router
  - Computer power supplies
  - Strong WiFi signals
  - Metal or metal wiring in the wall
- Make sure your operating system (OS) is up to date.
- Try on a different device to connect.

##### Q: How to Fix Keyboard Typing Multiple Letters on Windows 10.

Click win key > Settings > Ease of Access > Keyboard > find "Use Filter Keys", turn it on.

##### Q: How to Fix Keyboard Typing Multiple Letters on Mac.

- On a Mac, choose the Apple menu > "System Preferences", click "Keyboard", and choose the Keyboard tab.
- Locate the "Key Repeat" slider setting and adjust it to the "Off" position.

- 8 -

#### FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- 9 -



## Clavier sans fil à connexion multidispositifs

IC-BK10

### Manuel d'utilisation

#### Instructions de couplage

##### A. Coupler avec 1er/2e/3e appareil.

- Faites glisser l'interrupteur d'alimentation sur "ON" pour mettre le clavier sous tension.
- Appuyez BT1/BT2/BT3 pour choisir le canal Bluetooth 1/2/3.
- Appuyez sur BT1/BT2/BT3 et maintenez enfoncé pendant 5s en mode de couplage Bluetooth jusqu'à ce que l'indicateur clignote.
- Sur votre appareil Bluetooth, trouvez le nom Bluetooth "iClever IC-BK10 Keyboard" et cliquez pour le connecter.
- L'indicateur d'état s'éteint une fois le couplage réussi.

##### B. Commuter entre les appareils connectés.

Si vous avez déjà réussi à vous connecter avec le canal Bluetooth 1/2/3, vous pouvez appuyer sur BT1/BT2/BT3 pour basculer entre les appareils connectés.

\* Bande de fréquence : 2402 MHz – 2480 MHz  
\* Puissance d'émission maximale : 0 dBm

#### IC Caution

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'empêcher le fonctionnement.