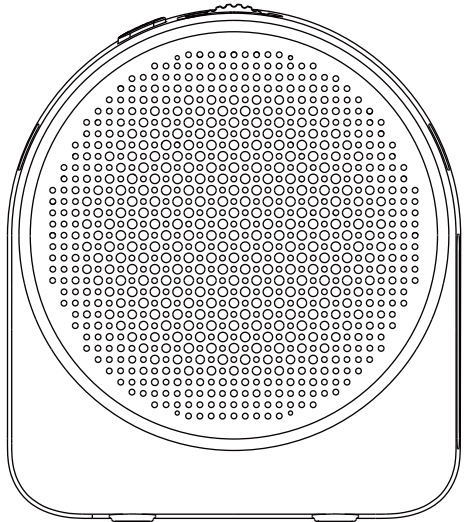

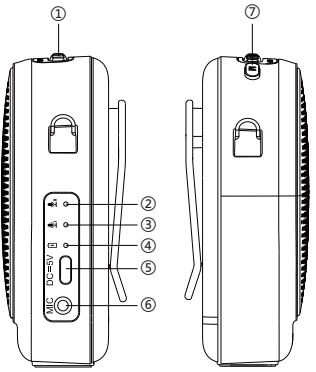
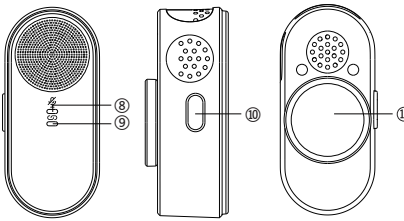


说明书尺寸:85mmX120mm

HIPPO  User Manual Amplifier MA1 V1.0.0	Product Introduction Thank you for choosing this product. This product is specially designed for teachers, tour guides, shopping guides and other users. It features high-fidelity sound, low noise, extremely low distortion, stable performance and low power consumption. With an attractive and smooth appearance, it is portable and easy to operate. It is an ideal helper for your teaching, outdoor speeches, public communication and other activities. Product List Voice Amplifier×1 Wireless Microphones×2 Lanyard×1 Type-C Charging Cable×1 User Manual×1	Function Buttons / Interface Description  ① Volume Switch / Volume Control ② Mic 2 Connection Indicator ③ Mic 1 Connection Indicator ④ Power Indicator ⑤ Type-C Charging Port ⑥ Microphone Input Jack ⑦ Mode Switch Button Function Buttons / Interface Description  ⑧ Mute Indicator ⑨ Connection Indicator ⑩ Power Switch ⑪ Magnetic	Operating Instructions 1. Power on: Turn the power switch to "ON". 2. Power off: Turn the power switch to "OFF". 3. Microphone Mode / Bluetooth Mode / Outdoor Mode: Press the M button briefly to switch. 4. Volume Control: Turn toward " " to increase volume; turn toward " " to decrease volume. Operating Instructions for Voice Amplifier 1.Microphone Mode Note: The default mode is wireless microphone. When a wired microphone is connected, the system will switch to wired microphone automatically. 1.Instructions for Lavalier Wireless Microphone 1.Turn the power switch of the amplifier to "ON". 2.Take out the lavalier wireless microphone and turn it on. It will pair with the amplifier automatically. The green indicator stays on when connected successfully.Or manual pairing: press the power switch three times continuously; the green indicator flashes quickly to enter pairing mode. The green indicator stays on after successful connection. 3.Mute mode: press the power switch once to turn mute on or off. The blue indicator lights up when mute is on and turns off when mute is off. 4.Clip the lavalier microphone to the user's collar. Adjust the amplifier volume according to the surrounding environment to avoid howling. 5.How to wear the lavalier microphone: clip the back clip on to the collar (as shown in the figure below).  This side faces up during use. Magnetic Clip
II. Bluetooth Mode: MA1 1. Short press the Mode switch to enter Bluetooth mode. Use your mobile phone or other devices to search for the Bluetooth name "MA1" and connect.When connected successfully, a voice prompt will say "Bluetooth connected". When disconnected, it will prompt "Bluetooth disconnected". 2.Play audio files from your mobile phone or other devices with Bluetooth transmission function. Indicator Status Description 1.Low battery voice prompt will be activated in low battery mode. 2.Please charge the lavalier microphone in time when the red indicator flashes.The red indicator stays on during charging and turns off when fully charged. 3.Connect one end of the USB charging cable to the Type-C charging port of the amplifier, and the other end to the USB port of a power adapter for charging. 4.When the amplifier is low on power or not used for a long time, fully charge the battery before turning it off for storage to extend and protect battery life. 5.The lavalier microphone will power off automatically 5 minutes after disconnection from the amplifier. Manual power-on is required for next use. 6.This product is sold without a power adapter.If a power adapter is used for charging, please use a matched adapter with CCC certification that meets relevant standard requirements. Important Note: This product does not support fast charging. Please use a CCC-certified 5V 2A power adapter for charging. Exceeding the rated power may cause damage to the product.	Product Parameters Signal-to-Noise Ratio: ≥75 dB Bluetooth Version: 5.4 Frequency Response: 200 Hz–15 kHz Receiving Distance: 30 m Amplifier Dimensions: 96 mm × 44 mm × 110 mm Lavalier Microphone Dimensions: 19 mm × 16.2 mm × 41 mm Battery Capacity: 1800 mAh Working Time: 5 hours Charging Time: 2 hours Power Adapter: 5V/2A *Due to ongoing business development, product functions, parameters and images are subject to change without notice. We cannot guarantee timely updates to packaging and manuals. The actual product features and specifications shall prevail. Manufacturer Information Product Name: Wireless Lavalier Voice Amplifier Manufacturer: Shenzhen Xiaoxi Intelligent Manufacturing Co., Ltd. Production Address: Room 702A, Building A, Shanghe Industrial Park, Nanchang Road, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen City Executive Standard: GGB 4943.1-2022	Precautions 1. Disconnect the charger and turn off the device before cleaning. 2. Do not disassemble the device without professional assistance to avoid malfunction and loss of warranty. 3. Do not place the device in direct sunlight to prevent premature aging of electronic components. 4. Avoid using the device in dusty or dirty environments as dust may cause malfunctions. 5. Do not place the device in extremely cold or hot environments, as it may not operate properly. 6. Recommended operating environment: temperature -10°C–40°C, relative humidity 10%–95%. 7. Do not insert any objects into the device to avoid short circuit or damage to internal components. Do not spill liquid on the product. 8. Avoid friction or impact with hard objects to prevent scratches, peeling or other hardware damage. 9. Do not expose the product to direct sunlight, fire or other overheating environments. 10. Do not disassemble, impact, squeeze or dispose the product into fire. Stop use if the battery is seriously damaged. 11. This manual contains important information. Please keep it for future reference.	NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. FCC RF Exposure Warning Statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment can be used in portable exposure conditions.