



Energizer®

recharge. PRO

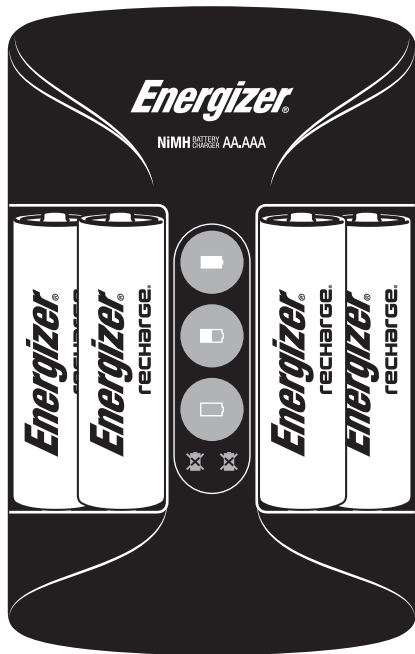

Best used with Energizer® NiMH batteries
 Utilisation optimale avec les piles NiMH Energizer®
 Mejor si se usa con pilas NiMH Energizer®
 Melhor se usado com baterias Energizer® NiMH

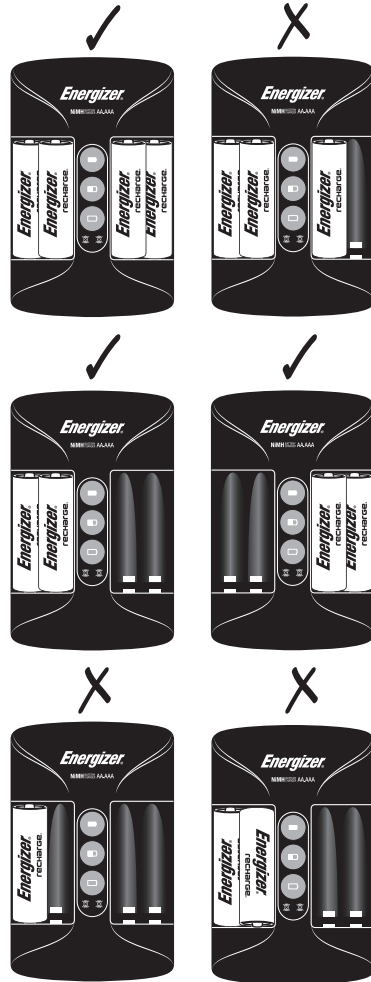

Please read this manual before you use the charger, and save it for reference.

Battery: Nickel Metal Hydride (NiMH) Rechargeable batteries

Sizes: AA and AAA

Recommended: Energizer® NiMH Batteries

CHARGING

1. Load Batteries into Charger

- Insert batteries to match the polarity marks (+ and -).
- Note: when charging only two batteries, place batteries in the two positions to the left or right. Both AA and AAA size batteries can be charged at the same time.

2. Plug in the Charger

- Plug transformer into a standard AC outlet.

3. Charging Indication

Tri-colored 'stop light' LED feature down the center of the charger

- **RED** = Charging, approximately 0-49% charged
- **AMBER** = Charging, approximately 50-99% charged
- **GREEN** = Charging Complete, approximately 99-100% charged (note the charger will automatically turn off at 100% charged, however the green light will stay lit to confirm the batteries have completed their charging and are ready for use)
- **RED X** = Bad/Primary Battery Detection

Sound Indication

- **Single Beep** = charging has started
- **2 Beeps continued** = charging is completed
- **Continuous Beep** = Bad/Primary Battery Detection

4. Store

- **Unplug the charger from the AC outlet**

CHARGING TIMES

Battery Size (NiMH) 2 or 4 batteries	Rated Capacity (mAh)	Approximate Charge Time (hrs)*
AA	1300-2000	3-4
AA	2000-2400	4-5
AAA	500-800	3-4

*Charge times are a guide only. Timing may differ according to brands/mAh capacity and environment conditions at the time of charge

Note: Batteries will *not* be damaged if left in the charger for a longer time.

SPECIFICATIONS

Model:	CHPRO-US, CHPRO-EU, CHPRO-AR, CHPRO-BR
Charges:	2 or 4 AA or AAA NiMH
Input for all plugs:	AC 100-240V, 50/60Hz (for all other plugs)
Charging current/Output:	DC 2.8V – 500mA (AA x 2 or 4) DC 2.8V – 220mA (AAA x 2 or 4)
Safety feature:	Auto shut off – Voltage Detection and Timer Reverse Polarity Protection Primary/Bad Battery and Short Circuit Detection

WARNING

To avoid personal injury and property damage from, but not limited to, the risk of electric shock or fire:

- Charge only Nickel Metal Hydride (NiMH) rechargeable batteries. Charging other types of batteries may cause them to leak, rupture or explode.
- Do not open battery, dispose of in fire, put in backwards, mix with used or other battery types or short circuit – may ignite, explode, leak or get hot causing injury.
- Use the charger only in dry locations. Keep away from rain, snow or excessive moisture.
- This charger is intended to be in a vertical or floor mount position.
- Never plug battery chargers into an extension cord.
- Do not operate the charger if damaged.
- Do not disassemble, modify any part of the charger, or attempt to use the charger as a power source.
- Unplug before attempting maintenance or cleaning.
- For use in other countries beyond USA, attach the proper plug adapter.
- This charger is not a toy and should not be used by children or infirmed persons without adequate training or supervision.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

LIFETIME LIMITED WARRANTY

Lifetime Limited Warranty: Warranty covers any defect in material or workmanship. It excludes damage caused by normal wear and tear, misuse, modification. Warranty lasts for as long as the original United States or Canadian purchaser owns this Energizer Battery Charger and these Energizer Nickel-Metal Hydride Rechargeable Batteries. Warranty terminates if you sell or transfer them. Energizer will repair or replace them at its option. Call 1-800-383-7323 for warranty service. Warranty is limited to consumer use. EXCLUDES ALL INCIDENTAL AND CONSEQUENTIAL DAMAGES. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY HAVE OTHER RIGHTS WHICH VARY BY JURISDICTION.

Questions? 1-800-383-7323

www.energizer.com

www.energizer.ca

Energizer Holdings, Inc., St. Louis, MO 63141, U.S.A.

Energizer Canada Inc., Walkerton, Ontario N0G 2V0 TM Used under lic./MC Usager lic.

IMPORTANT SAFETY INSTRUCTIONS - SAVE THESE INSTRUCTIONS. DANGER - TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, CAREFULLY FOLLOW THESE INSTRUCTIONS.