




A9 User Manual



Support Email: service@asingshop.com

1. Button Overview

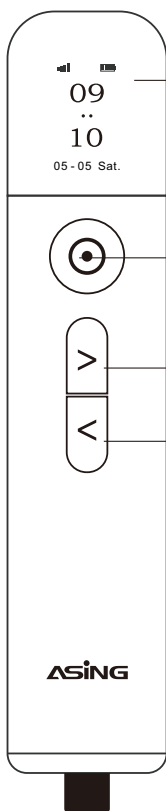

LED Display Screen

Showing date, time, signal, battery level, timer, anti-lost prompt.

Touch Sensor button (touch/press)

One touch: exit current function/confirm to use air mouse function

Long touch: Magnifier/Spotlight/Digital Laser, and move around

One click: switch Magnifier/Spotlight/Digital Laser

Long press: Physical/Digital Laser

Page Up Button


Click: navigate backward

Long Press: enter/exit full screen

Page Down Button

Click: Navigate forward

Long Press: enter/exit blackscreen



Type-C Charging Port

2. Quick Setup

- 1) Unplug the USB receiver from the presenter to turn it on. Plug it back to turn it off.
- 2) Plug the USB receiver into a computer.
- 3) Open the correct ASiNG program.



XP program for
Seewo & Windows




Mac program for
MAC OS



Android program
for Android

Currently, some versions of Windows 10 are supported for plug-and-play, no need to open the program.

- 4) Now the ASiNG icon turns red and all functions can be used normally.



USB Receiver

Computer USB Port

3. Button Combination


Function	Button	Action	Description
Timer	⦿ + >	Long press	Timer prompt (last set timer by default)
Mouse Left button	⦿ + <	One-click	Select the left mouse button in the ASiNG program
Key value switch	> + <	Long press	Switch three key values cyclically: ← & →, ↑ & ↓, Page Up & Page Down

Timer Prompt:


- 1) The time can be set via the ASiNG program and will be displayed on the LED display screen.
- 2) The presenter will vibrate when the time ends. Specifically, it will vibrate once every minute for the last 5 minutes, 3 times continuously when the time is over.

4. ASiNG Software Interface

Check

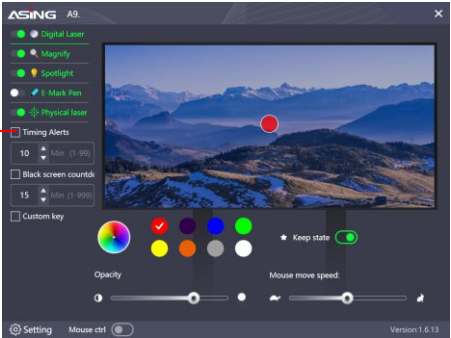

- 1) The left side is the function selection area. If checked, functions are enabled.
- 2) The bottom is the effect adjustment area, where you can adjust the color, transparency, etc.
- 3) The middle is the effect preview area, where you can preview the effects you set.
- 4) You can only select and use between a highlighter and a physical laser at a time.

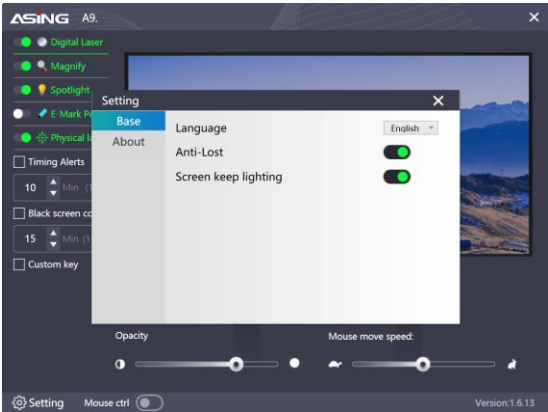

Anti-lost Prompt

When not operated for 5 minutes, the presenter will automatically enter the anti-lost prompt. A USB receiver icon will be displayed on the LED display and it will vibrate 5 times continuously.

5. Functions Display

1) LED Display



Real Time Display
May 5th - Sat.
09:10
(Normal Connection)



Timer Remaining Time Display
May 5th - Sat.
5 min 1 s
(Normal Connection)



The USB receiver is neither plugged into the computer nor in the presenter. A USB receiver missing icon will appear.

a. When the presenter is turned on, the LED display will be on. When the USB receiver is plugged into a computer, the presenter will automatically read the time and display the real-time on the LED display. Two dots in the middle of the real-time will flash.

b. With a gravity sensor built-in, flip the presenter around to show the time and it will last for 5 seconds.

2) Digital Laser / Full Scene Marking / Magnifier / Spotlight



Digital Laser
(Color, size & transparency are adjustable.)



Full Scene Marking
(Color & thickness are adjustable.)



Magnifier
(Magnification & size are adjustable.)



Spotlight
(Size, brightness & blur are adjustable.)

Long touch the  button to use those functions, and the default function is the last used one. To switch, just double-click the  button.

6. Low Battery & Charging

1.Low battery: When it's less than 10%, the ASiNG software interface will display the red battery icon and battery power. Also, the battery icon will become red on the LED display screen.

2. Charging: When charging, the battery icon changes dynamically. When fully charged, the battery icon will become red.

7. Special Instruction

1) Pairing

Steps: a. turn off the presenter; b. Long-press the Up & Down button, and meanwhile unplug the USB receiver. The software will show "pairing". c. Plug the USB receiver into a computer, and the presenter will automatically restart. The pairing is successful.

2) Gyroscope Calibration

First, turn off the presenter, and then place it on a flat surface for 3 seconds(no shaking at all). It will automatically calibrate successfully.

8. FAQs

Q1. The presenter cannot be turned on.

A1. Check whether the USB receiver is unplugged; Check if it's a dead battery, and Try again after charging.

Q2. The presenter is turned on but doesn't work.

A2. Check if the USB receiver is plugged into the computer correctly or try with another computer. If it's still not working, turn the presenter off and on, and try again.



Warning:

1) When using this product's USB flash drive, please do make copies as we do not provide data repair.

2) This product has a class 3R laser and DO NOT shine the laser in the eyes of humans or animals!

9. Product Specification

Sender Part

Wireless Technology	2.4GHz
Range	100m (in a demonstration environment)
Lithium Battery	lithium battery
Working voltage	3.0-4.2V
Size	139.5*28*14mm
Weight	46.3g

Receiver Part

Compatible Devices	Laptops, Desktop Computers
Compatible Systems	Windows / MAC OS
Compatible Por	USB3.0/2.0/1.1
Working voltage	3.0-4.2V
Size	49*17.5*9.5mm
Weight	6.5g



If any questions, please feel free to contact us.

Site: www.asingshop.com

Email: service@asingshop.com

YouTube: ASiNG Shop

Shenzhen Ruisicong Technology Co, Ltd., Shenzhen, China

