

User Manual

Android POS Terminal




The pictures are for reference only; please prioritize practicality.

— 1 —

Desktop Terminal Installation


1. Open the Cable Management Front Cover

Locate the reserved handle position on the cable management front cover. Use this handle to open the column front cover. Alternatively, you can simply grip the column front cover with your hand and remove it.



2. Install the Cable Management Front Cover


First, install the cable Management front cover near the bottom, then secure it by buckling it back into the other positions along the edge.



— 3 —

Package Content

Please check the following parts before use:

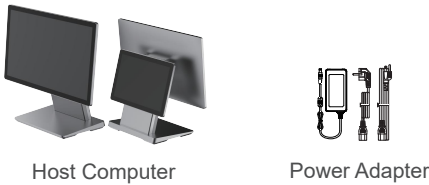

Device




- ① Main Screen
Designed for operator use.
- ② Cable Management Bin
All types of cables can be connected and routed through this bin.
- ③ Power Button
When the device is off, short press the button to turn it on.
When the device is on:
• Long press for 4 seconds to initiate a soft power-off.
• Long press for 11 seconds to perform a hard power-off.
- ④ Secondary Screen
For display use only.

— 2 —

3. Connect the Power Cord

Insert the DC power connector of the adapter through the bottom of the base and connect it to the power port on the host column. Then, plug the other end of the adapter into the mains socket.




— 4 —

Technical Data

Display Parameter	Main Screen: 15.6", FHD 1920*1080 Secondary Screen: 10.1", HD 1280*800 (dual-screen model)
Touch Screen	G + G, 10 Point Touch
OS	Meituan OS
Storage	4GB RAM + 32GB ROM
Wi-Fi	2.4GHz/5GHz, IEEE 802.11 a/b/g/n/ac/ax
Bluetooth	Bluetooth 5.4
Speaker	3W
Overall Size	372*160*329mm (L*W*H)
Power Adapter	INPUT: 100-240V~ 50/60Hz OUTPUT: 24V $\overline{\sim}$ 1.5A
Storage Temperature	-20℃~60℃
Storage Humidity	10~90% RH
Working Temperature	-10℃~55℃
Working Humidity	20~80% RH

— 5 —

Interfaces Introduction

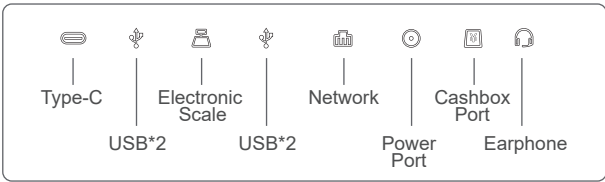

Startup Procedure – Single Monitor / Dual Monitors

- Press the Power Button to power on the device. The display will activate. Upon initial boot, the startup interface will appear. Follow the on-screen prompts to proceed with operation.
- The device supports two methods of internet connectivity:
 - Wireless Connection:** Select the desired wireless network from the available options on the welcome screen. Enter the network password when prompted to establish a connection.
 - Wired Connection:** Connect an Ethernet cable from the network source to the device's network port to establish a wired connection.

— 7 —

Safety and Usage Precautions

- Do not use the device in environments containing combustible gases, vapors, or dusts.
- Non-professional users must not disassemble or repair the power adapter, as there is a risk of high-voltage electric shock.
- Avoid installation or operation during thunderstorms to prevent damage caused by lightning strikes.
- If overheating, smoke, or abnormal odors are detected, disconnect the power immediately.
- Do not operate the device in extreme environmental conditions such as very cold, hot, or humid environments.
- For cleaning, use a dry, soft cloth. If necessary, a surface cleaner spray can be applied after the device is powered off, ensuring no liquid enters the device.
- Avoid dropping or throwing the device. Handle with care and do not forcibly adjust the screen angle.
- Use the device in a clean, dust-free environment. Prevent the intrusion of small metal objects and insects into the device.

— 6 —

Warranty Statement

Terms of Warranty

Your hardware is covered for up to one year from the date of purchase. This limited warranty applies solely to you, the original purchaser, and is non-transferable to any subsequent owner, lessee, or recipient of the product.

This warranty does not cover and we are not responsible for:

- Damages resulting from misuse, abuse, accidents, fire, theft, loss, or misplacement.
- Damage caused by power fluctuations, surges, or connections to improper voltage sources.
- Damage caused by viruses, malware, or malicious software.
- Damage resulting from reckless, willful, or intentional conduct.
- Damage due to servicing performed by unauthorized personnel.
- Damage caused by improper use inconsistent with product instructions or user manuals, including failure to perform necessary cleaning or preventive maintenance.
- Damage resulting from modifications to the product or its components without prior written approval.
- Normal wear and tear, including gradual image degradation, uneven screen aging, burn-in, or pixel failure within the product's specified tolerances that do not significantly impair functionality.
- Software issues, including the operating system, pre-installed software, third-party applications, or reloaded software.
- Components or equipment not originally supplied with the product.
- Minor imperfections that meet design specifications.External appearance damage such as scratches, cracks, or other cosmetic issues that do not affect functionality.
- Missing, altered, or defaced serial numbers.
- Wireless data services provided by third-party providers.
- Damage caused during transportation or improper packaging when returning the product.

— 8 —



90101-46910



FCC warning statements:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.