

Nobsound

DOUK AUDIO
MAKE HI-FI AFFORDABLE

MANUAL

Introduction

SP102 is a passive audio selector, convenient to compare the sound quality of 2 pair of different speakers or 2PCS amplifiers. Each channel can pass through power up to 200W, fully isolated design for all channels and the GND of each channel is independent, suitable for all types of amplifiers. Proper size with simple appearance, fashionable and durable, convenient for use in most situations.

Warm tips

1. Only 1 group of amplifier input or 1 group of speaker output at a time, not support 2 groups of them working in parallel at the same time.
2. When the toggle switch in OFF position, the connection between A&B channels and I/O channel will be disconnected, equivalent to mute, no sound will output.

Step for use


1. According to the connection:
 - ① 1-IN-2-OUT, connect one amplifier to I/O input channel, then connect 2 pairs of speakers to A/B channel.

② 2-IN-1-OUT, connect 2 pairs of amplifiers to A/B channel, then


connect 1 pair of speaker to I/O output channel;

2. After correct connection, select A or B channel to compare different amplifiers input or speakers output via toggle switch on the front panel.


Front and back panel

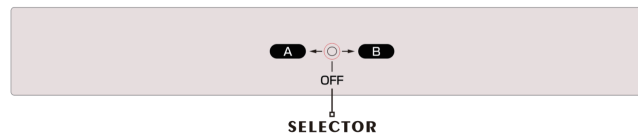

1 IN 2 OUT MODE

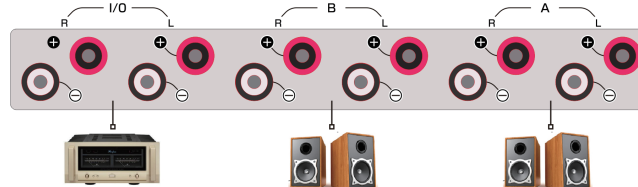

2 IN 1 OUT MODE

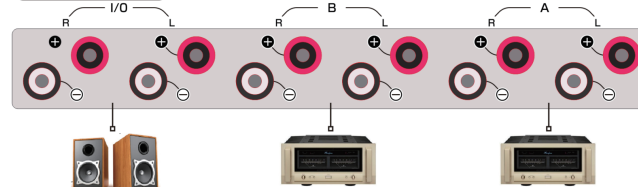

Parameters

Brand: Douk Audio

Model: SP102

Interface: banana speaker jacks

Number of channel: 2 groups of A/B, 1 group of I/O

Mute: support

Working methods: 1-IN-2-OUT / 2-IN-1-OUT

Power(max) support: 200W each channel

Types of amplifier supported: all types (BTL, class A, class B, class D etc.)

Dimensions(W*D*H): 242*108*33mm / 9.53*4.25*1.30in

Net weight: 720g / 1.59lb

Package weight: 1000g / 2.20lb

Contact information

Website: www.doukaudio.com

Email: nobsound@doukaudio.com

WeChat/Whatsapp: +86-17704028602

Address: Room 1329, Wang Cheng Building, Long Guan

East Road, Long Hua District, Shen Zhen, Guang Dong,

China, 518000