
Product Manual

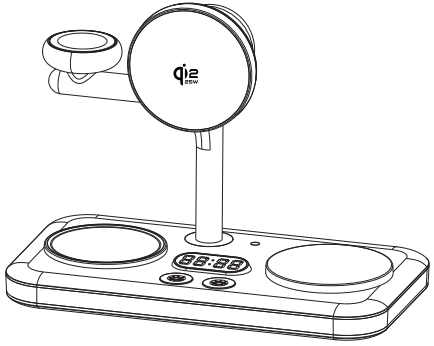

Model: X3

Multi-Functional Wireless Charger

(Dual phone charging slots, smart watch, earbuds, side ambient light, sunset lamp)

Product Specifications


Model: X3
Mainboard Solution: NU17122
Material: ABS + PC
Dimensions: Length 181.0 × Width 100.11 × Height 138.43 (mm)
Charging Method: Electromagnetic Induction
Input Voltage & Current: 15V/3A
Wireless Charging Output Power (Vertical Phone): 5W, 7.5W, 10W, 15W, 25W
Wireless Charging Output Power (Flat Horizontal Phone): 5W, 7.5W, 10W
Wireless Charging Output Power for Apple Earbuds: 5W
Wireless Charging Output Power for Apple Watch: 1~3W
Max Total Output Power of the Whole Unit: 45W
No-Load Power Consumption: <1W
Effective Transmission Distance: <5mm
Conversion Efficiency: <80%
Operating Frequency: 115~205KHz, 360KHz

Protection Measures: Foreign Object Detection, Over-temperature Protection, Over-current Protection, Under-voltage Protection, Short-circuit Protection, Over-voltage Protection, Over-charge Protection, Over-discharge Protection.

Circuit Protection Functions

① Input Under-Voltage Protection: 4.3±0.3V. The product cannot work normally when the voltage is lower than this value.
② Input Over-Voltage Protection: 16±0.5V. The product will stop working if the voltage exceeds this value.
③ Temperature Protection: The NTC temperature threshold is 75°±5°C. The unit stops charging when overheated and resumes charging after 5 minutes of over-temperature protection.
④ FOD Foreign Object Detection: Tested with a metal piece of 25mm diameter. The device will trigger an alarm and cease operation once foreign metal objects are detected.

Button & Clock Operation Instructions



(1) 12/24-hour format switching: Press the 12/24H switch button three times continuously to toggle between 12-hour and 24-hour modes.
(2) Short press the left button to turn the sunset lamp on/off; long press to adjust lamp brightness.
(3) Short press the right button to turn on the warm white base light; short press again to switch to plain white light; short press a third time to turn off both lights, and repeat this cycle. Long press to adjust brightness.
(4) The photosensitive resistor automatically adjusts screen brightness: the light dimmest at night and brightest during the day.
(5) Connect to your mobile phone via Bluetooth (Bluetooth name: X3 charging station) to synchronize the screen clock with your phone' s time.
(6) Long press both left and right buttons simultaneously for 3 seconds to adjust screen brightness.

Note:Metal foreign object detection alert: The base indicator light will flash.

CE FC RoHS
Made in China

FCC Warning

15.19 Labeling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment.
3. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.