


AI Bird Feeder Quick Guide

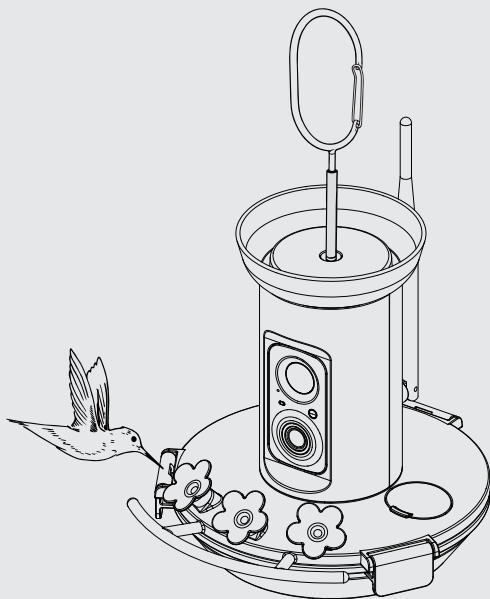

USER MANUAL

Warning

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.

FCC (USA) 15.9 prohibition against eavesdropping except for the operations of law enforcement officers conducted under lawful authority, no person shall use, either directly or indirectly, a device operated pursuant to the provision of this part for the purpose of overhearing or recording the private conversations of

others unless such use is authorized by all of the parties engaging in the conversation. Changes or Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCCID: 2AVEK-V10-FNQ01

IC Caution:


- English:
This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
1. This device may not cause interference.
 2. This device must accept any interference, including interference that may cause undesired operation of the device.

CE RED This product can be used across EU member states.


Catalog

1. What's In The Box	P. 1
2. Product Overview	P. 2-3
3. Battery Charging	P. 4
4. How to Turn On & Off the Camera	P. 5
5. Set up with O-kam Pro App	P. 6
6. Connection Camera--Bluetooth Mode	P. 7-9
7. Device Sharing	P.10
8. Fill the Nectar	P. 11-12
9.Read Before Installation	P. 13
10.Assemble the Hummingbird Feeder	P.14-16
11.Special Reminder	P.17
12. Solar Panel Installation	P.18-19
13. Clean the Hummingbird Feeder	P. 20-24
14. Frequently Asked Questions	P. 25-26

What's in the Box



Bird Feeder



Hanging Hook



Feeding Port



Antenna




Mounting Screws




Anchors




Clean Brush



Solar Panel





Type C Power Cable




Quick Guide

Product Overview

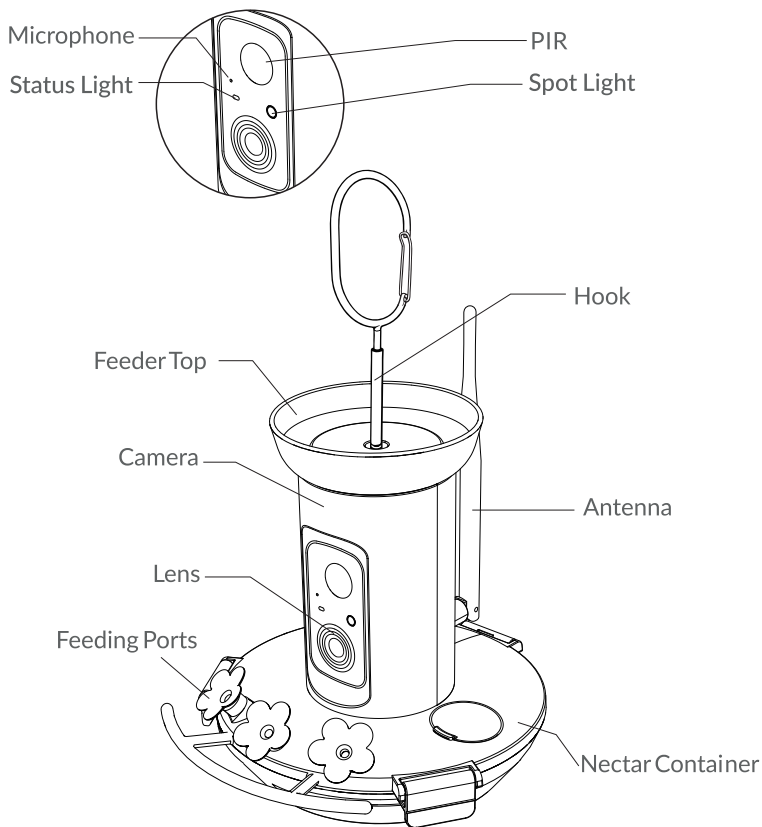


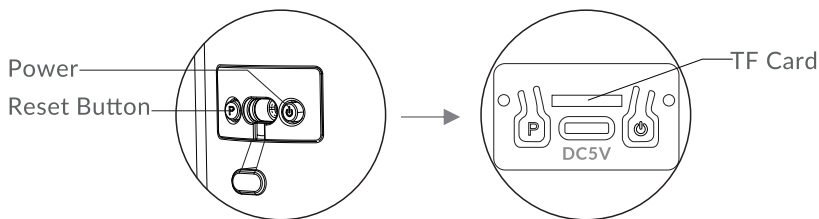

You can insert a TF card after opening the entire silicone cover.

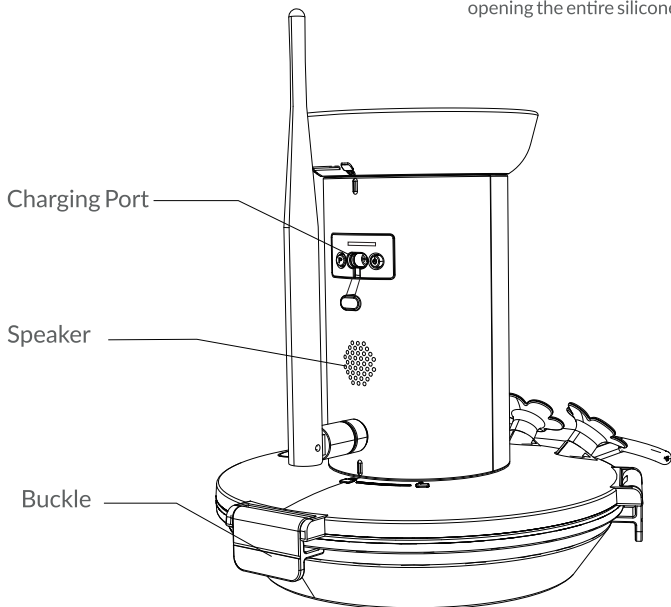

Battery Charging

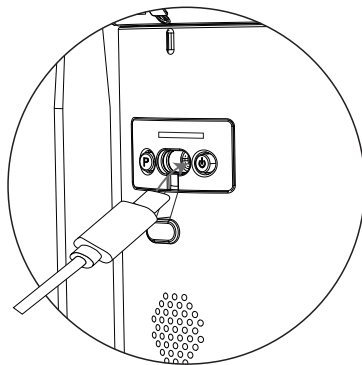

The batteries inside the camera are not fully charged according to the transportation safety regulations. Please fully charge the camera before using it.

Please charge the batteries with provided Type-C Port Cable (DC5V/1.5A adapter not included).


The status light turns red while charging and turns green when fully charged. It takes about 8 hours to fully charge your camera.

How to Turn On & Off the Camera

How to Activate the Camera:

Press and hold the power button for 3 seconds to turn on the camera. When powered on for the first time, the camera will enter the pending binding status, with its status indicator flashing blue, and it will prompt you to bind the Wi-Fi via the app.

If the camera's status indicator remains lit continuously, double-click the power button consecutively to switch the device to the pending binding status.

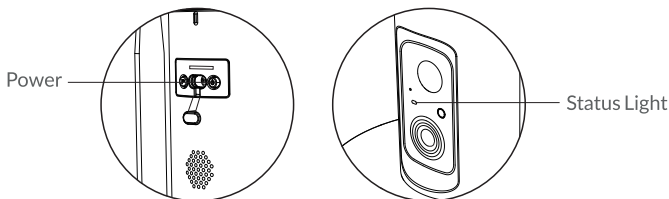

To turn off the camera:

Press the power button on the back of the camera to turn it off. Then the indicator in the left of the camera will be off.

Status Light

Indicator Light	Device Status
Blue Light Flashes Slowly	Waiting for Connection
	Connection Failed
Blue Light Flashes Quickly	Network Connecting
Blue Light Always On	Network Connection Successful
Blue and Green Light Flashes Slowly	Device Unbinding
Solid Blue	Device Is Active
Solid Red	Charging (Device Not Active)
Solid Green	Fully Charged (Device Not Active)
Solid Red + Blue (Appears Magenta)	Charging While Device Is Active
Solid Blue + Green (Appears Cyan)	Fully Charged While Device Is Active





Set Up with O-kam Pro App




Download O-kam Pro App from App Store or Google Play. You can also download the App by scanning the QR code above with the QR code scanner in your smartphone.

Connection Camera--Bluetooth Mode

1. Power on the Camera, When you hear: hearing "Please use the APP for Wi-Fi configuration" Click "+" to add device. (If you do not hear the prompt, please double-press the power button consecutively.)
2. Bluetooth will find the device nearby. Please click "Connect".

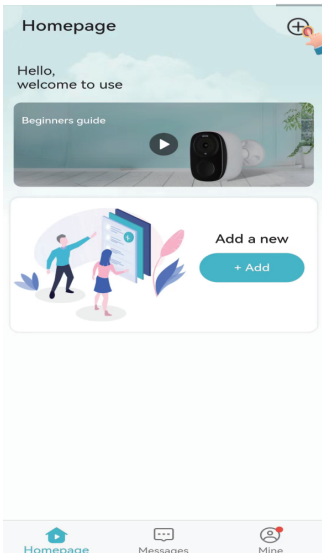

Found new device ✕
elect the Bluetooth device below to conr



3. Select Wi-Fi, enter the correct password, and click "Next."

← **Connect Wi-Fi**



Please select 2.4GHz Wi-Fi and enter the password, please double check if the device supports 5G Wi-Fi or enterprise Wi-Fi (Device that supports 5G can choose to connect to 2.4Gwifi or 5Gwifi). Hidden Wi-Fi can't support the network connection?

📶 **VDS-2.4g** ⌵ Switch network

🔒 Please enter WiFi password 👁

✅ Remember Wi-Fi name and password ℹ

Next ?

The password is only used for Wi-Fi connection and does not involve any security issues.

4. You will hear "Connecting the Wi-Fi please wait" and "the Wi-Fi connect succeeded".

← **HTB0066841SQA0**



Connecting...

The connection process takes about 1-2 minutes, please do not disconnect the network

- ✅ Camera accesses network
- ✅ Camera found
- ✅ Subscription to cloud sen
- • Camera adds to App

5. You can customize the device name. and click "Get started".

6. Congratulations!
Your device has been added successfully.

Binding device



Confirm binding Camera"HTB0066841SQA0"

Camera name

Yard

Garage

Front door

Yard

Living room

Office

Back
garden

Corridor

Entrance

Balcony

Get started




Homepage



Yard

HTB0066841SQA0

Online

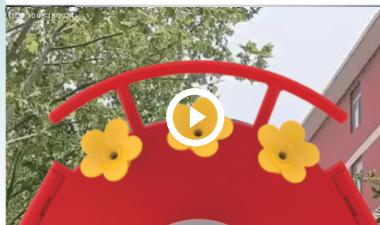

Silence



Share



Playback



Settings



Homepage





Messages



Mine

Device Sharing

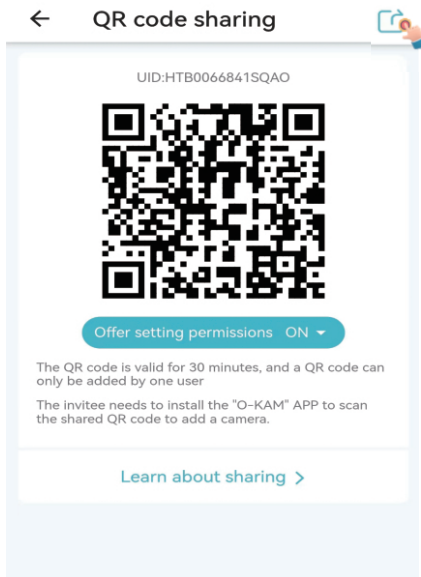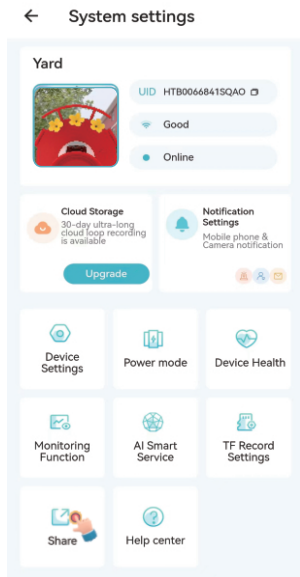

Please click "Settings" to enter system settings, choose "share" to share device, there will be a QR code. Please note you can on or off setting permission, If Select "On" to allow others to manage the device. Select "Off" to allow view-only access.