

Laser Distance Measurer


AUTEL-CSC050A/26

1




Turn on the MaxiSys tablet. Tap the **Settings** application on the MaxiSys Job Menu.

2

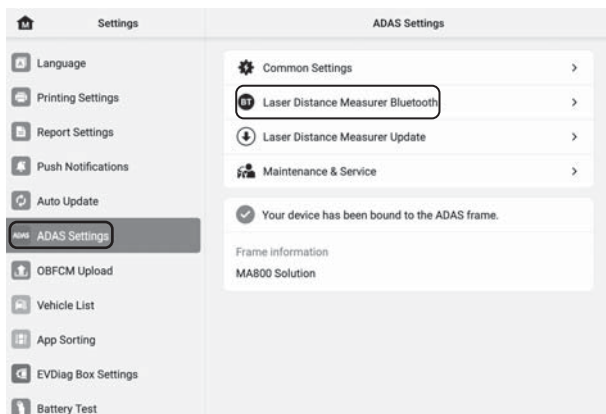

Tap **ADAS Settings** on the left column. Select **Laser Distance Measurer Bluetooth** to proceed.

3

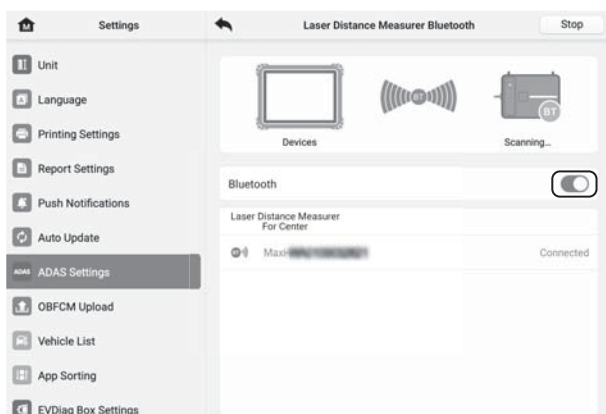

Tap the Bluetooth toggle to enable Bluetooth for pairing. The tablet will search for available laser measure units. The Bluetooth name of the device is “Maxi”, followed by a serial number. Tap the desired device to connect. When the connection is established, the status displays “Connected”.

Laser Measure Unit Update

1

Settings

Language

Printing Settings

Report Settings

Push Notifications

Auto Update

ADAS Settings

OBFCM Upload

Vehicle List

App Sorting

EVdiag Box Settings

Battery Test

ADAS Settings

Common Settings

Laser Distance Measurer Bluetooth

Laser Distance Measurer Update

Maintenance & Service

Your device has been bound to the ADAS frame.

Frame information

MA800 Solution

Tap **Settings** > **ADAS Settings**, and then select **Laser Distance Measurer Update** to proceed.

2

Settings

Unit

Language

Printing Settings

Report Settings

Push Notifications

Auto Update

ADAS Settings

OBFCM Upload

Vehicle List

App Sorting

EVdiag Box Settings

Laser Distance Measurer Update

Devices

Laser Distance Measurer For Center

Maxi

Settings

Unit

Language

Printing Settings

Report Settings

Push Notifications

Auto Update

ADAS Settings

OBFCM Upload

Vehicle List

App Sorting

EVdiag Box Settings

Laser Distance Measurer Update

Devices

Laser Distance Measurer For Center

What is new in this release.BTFW Current version:V1.0.4;Latest version:V1.0.4
FW Current version:V0.99.12;Latest version:V1.99.12

Do not leave this page during upgrade!

Update now

Tap the connected laser measure unit, and then tap **Update now** to update the device.

NOTE: The illustrations in this Quick Reference Guide are for reference only. The actual screens may differ.



FCC Information and Copyright

This equipment has been tested and found to comply with the limits for a Class B digital device,

pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC RF warning statement: the device has been evaluated to meet general RF exposure requirement , The device can be used in portable exposure condition without restriction.